




	Page
Oils and Lubricants	2 - 6
Lubrication Equipment (Grease & Oil)	7 - 32
Fuel Equipment & Chemical Pumps	33 - 40
Air Equipment	41 - 42
Diaphragm Pumps & LED Light	43 - 44
Hose Reels	45 - 48
Protect Lanolin and Adhesive Products	49 - 60
Adhesive Products Chemical Compatibility	61 - 65
Automotive Hoses	67 - 70
Air Conditioning Hose and Fittings	71 - 72
Cable Ties & PirTie Staple Retainers	73 - 74
Hose Cleaning Equipment	75
Thread Identification and Tool Kits	76
Pressure Cleaner Components	77 - 85
Alphanumeric Index	86



# LUBRICANTS

## MINERAL BASED OILS AND GREASES

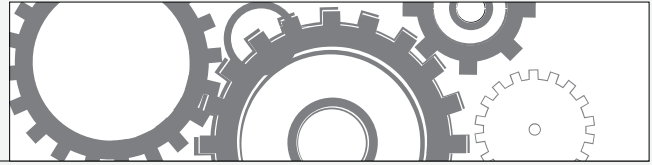

### Hydraulic Oils:

- Pirtek supply popular commonly used hydraulic fluids
- Available in ISO Grades 46 and 68
- All oils incorporate advanced performance additives to combat rust, corrosion and wear
- Meet or exceed major manufacturer's requirements
- Handy 10 litre packs or 205 litre drums
- High Viscosity HVI types available upon request



### Automotive Fluids:

- ATF Type D is a quality Automatic Transmission Fluid suitable for older style automatic transmissions and modern Power Steering systems available in a 5 litre pack
- For smaller power steering requirements, Pirtek offer a 350 ml pack of Power Steering Fluid
- For other specialist requirements, please consult Pirtek

### Greases:


- NLGI No2 Lithium complex grease contains extreme pressure additive
- Recommended for extended lubrication intervals
- Suitable for wheel bearings (disc and drum brakes), chassis, construction and farm equipment
- Provides superior resistance to water wash out
- Good adhesive properties
- Has a smooth texture and is blue in colour

### PIRTEK LUBRICATION PRODUCTS

Product Code	Description	350 ml	450 gram	1 litre	5 litre	10 litre	20 litre	205 litre
VATFD-05	Type D Automatic Transmission Fluid 5 Lt				•			
VATFDX3-01	Type DX3 Automatic Transmission Fluid 1 Lt			•				
VATFDX3-05	Type DX3 Automatic Transmission Fluid 5 Lt				•			
VPS-350	Power Steering Fluid 350ml	•						
VEP2-450	Molyliith EP2 Grease 450 g (Box= 12 Units)		•					
VM-450	Mo <sub>2</sub> Fortified Lithium Complex		•					
VHT46-10	Oil - Hydraulic Oil 46 X 10 Lt					•		
VHT46-20	Oil - Hydraulic Oil 46 X 20 Lt						•	
VHT46-205	Oil - Hydraulic Oil 46 X 205 Lt							•
VHT68-10	Oil - Hydraulic Oil 68 X 10 Lt					•		
VHT68-20	Oil - Hydraulic Oil 68 X 20 Lt						•	
VHT68-205	Oil - Hydraulic Oil 68 X 205 Lt							•

# LUBRICANTS

## MINERAL BASED OILS AND GREASES

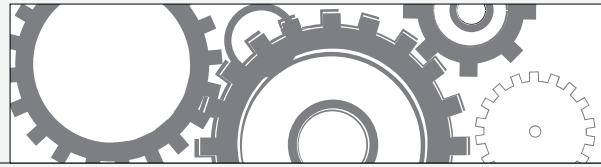

### VHT46

#### HYDRAULIC OIL

#### ISO GRADE 46



Product Code	Description	Packaging Size
VHT46-10	Hydraulic Oil 46	10 litre
VHT46-20	Hydraulic Oil 46	20 litre
VHT46-205	Hydraulic Oil 46	205 litre

- Premium mineral based oil with quality additives for long life
- Good oxidation resistance, corrosion prevention, and anti-wear performance
- Recommended for use in mobile and industrial applications where either mild or severe operating conditions exist
- Ideal for general industrial equipment such as machine tools, rotary air compressors and enclosed gearboxes where extreme pressure additives are not required
- NB: **NOT** recommended for Lucas pumps with silver bearings
- Always refer to the Owner's Manual for recommended oil grade and change intervals
- Approvals: Vickers M-2950-S, 1-286-S  
Cincinatti Milacron P68, P69, P70  
DIN 51524 Part 2  
US Steel 127, 136  
Denison HF-1, HF-0

### VHT68

#### HYDRAULIC OIL

#### ISO GRADE 68




Product Code	Description	Packaging Size
VHT68-10	Hydraulic Oil 68	10 litre
VHT68-20	Hydraulic Oil 68	20 litre
VHT68-205	Hydraulic Oil 68	205 litre

- Premium mineral based oil with quality additives for long life
- Good oxidation resistance, corrosion prevention, and anti-wear performance
- Recommended for use in mobile and industrial applications where either mild or severe operating conditions exist
- Ideal for general industrial equipment such as machine tools, rotary air compressors and enclosed gearboxes where extreme pressure additives are not required
- NB: **NOT** recommended for Lucas pumps with silver bearings
- Always refer to the Owner's Manual for recommended oil grade and change intervals
- Approvals: Vickers M-2950-S, 1-286-S  
Cincinatti Milacron P68, P69, P70  
DIN 51524 Part 2  
US Steel 127, 136  
Denison HF-1, HF-0

# LUBRICANTS

## MINERAL BASED OILS AND GREASES

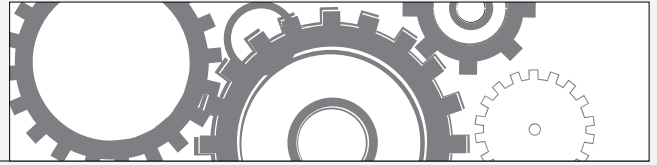

### VATFD

#### AUTO TRANSMISSION FLUID TYPE D



Product Code	Description	Container Size
VATFD-05	Auto Transmission Fluid Type D	5 litre

- Can be used in all vehicles requiring a IID specification fluid
- Suitable for all GM vehicles up to 1993
- Can be used for in service fills on most popular vehicles
- Approvals: GM 6137M  
Ford M2C 138-CJ  
DB 236.6  
DB 236.7

### VATFDX3

#### AUTO TRANSMISSION FLUID TYPE DX-3



Product Code	Description	Container Size
VATFDX3-01	Auto Transmission Fluid Type DX-3	1 litre
VATFDX3-05	Auto Transmission Fluid Type DX-3	5 litre

- Formulated with premium base stocks and advanced additive technology to meet the challenging demands of an automatic transmission environment
- A high quality friction-modified lubricant
- Carries both GM and Ford approvals
- Responsive low temperature fluidity
- Benefits both electronically and hydraulically controlled transmissions
- Surpasses the requirements of Manufacturers specifying DEXRON® III
- Features greater friction stability to maintain consistent shift performance
- Meets new tests for wear and shudder resistance
- Resists thickening due to high temperature
- Approvals:  
Dexron® III qualified  
Ford M2C 138-CJ, M2C 166-H  
Mercon  
Caterpillar TO-2  
HN 2105  
Allison C4  
GM 6297M

### VPS

#### POWER STEERING FLUID




Product Code	Description	Container Size
VPS-350	Power Steering Fluid	350 ml

- Formulated to meet the stringent requirements of most power steering units
  - Prevents corrosion, oxidation and wear
  - Helps stop leaks
  - Keeps seals and O-Rings pliable
- PLEASE NOTE: This product is not suitable for all vehicles / power steering units.  
Refer to vehicle owner's manual before application



# LUBRICANTS

## MINERAL BASED OILS AND GREASES

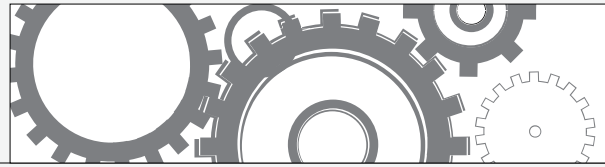

### VM

#### ALL PURPOSE GREASE

#### LITHIUM COMPLEX WITH 3% MoS<sub>2</sub>



Product Code	Description	Cartridge Size
VM-450	MoS <sub>2</sub> Fortified Lithium Complex	450 gram

- Special long life grease for high load service conditions
- Fortified with extreme pressure additives
- Contains rust and corrosion inhibitors
- Tackiness adhesive additives prevent squeeze out under high loads
- Molybdenum Disulphide (MoS<sub>2</sub> 3%) incorporated to increase film strength
- Suited to all types of automotive, industrial and marine applications
- Meets NLGI No. 2 performance
- Grey / black in colour
- 5% MoS<sub>2</sub> version available upon request
- 12 Units per carton

### VEP2

#### EXTREME PRESSURE GREASE

#### NLGI NO. 2 LITHIUM COMPLEX GREASE




Product Code	Description	Cartridge Size
VEP2-450	Valplex EP Grease	450 gram

- Contains a non-lead extreme pressure (EP) additive
  - Contains rust and corrosion inhibitors
  - Suited to extended lubrication intervals of vehicle chassis points
  - Other applications:
    - Wheel bearings (drum or disc brake equipped) for all types of vehicles and equipment
    - Oscillating bucket pins and universal joints
    - Ball, roller and slow speed plain bearings under all service conditions
  - Meets NLGI No. 2 performance
  - Blue in colour
  - Smooth and tacky texture
  - 12 Units per carton
- CAUTION: DO NOT mix greases. Always thoroughly wash out bearings and housings before repacking

# LUBRICANTS

## CLEANER AND DEGREASER

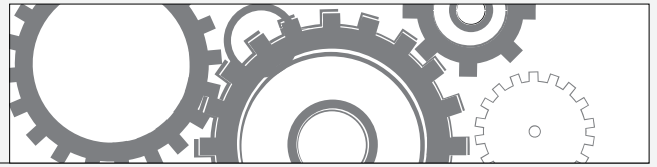

### VABPC

#### BRAKE PARTS CLEANER



Product Code	Description	Aerosol Size
VABPC-400	Brake Parts Cleaner	400 gram

- Quickly removes brake fluid, grease, oil and brake dust while leaving no residue
- The fast drying solvent helps dislodge surface dirt and oil to eliminate brake squeal
- Safe for use on electric motors, switches and distributor contacts during maintenance (do not apply to electrical components whilst they are in service)

### VAD

#### AUTO DEGREASER




Product Code	Description	Aerosol Size
VAD-400	SynPower Super Degreaser	400 gram

- An emulsifiable fluid with high solvency for removal of sludge and grime
- Clean engines, chassis, parts and concrete floors
- Simply spray on, allow to soak, and remove with jets of water
- Do not use on wet surfaces, since water will reduce the cleaning performance
- Available in bulk supply packs (5, 20, 205 litre) to special order

# LUBE EQUIPMENT

## GREASE, OIL, FUEL, WATER & AIR

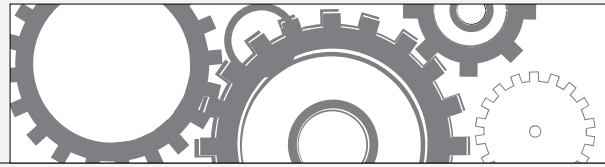

### Description :

- Pirtek's extensive range of fuel, lubricant, chemical and solvent drum pumps facilitate quick and easy fluid transfer
- If you are aiming to source a cost effective means of transferring fluids out of drums, Pirtek will have the equipment to suit your needs to get the job done quickly

### Product Range:

- 20 litre drum pumps
- 60 litre drum pumps
- 205 litre drum pumps
- Hand operated drum pumps
- Air operated drum pumps
- 12 volt, 24 volt, 240 volt drum pumps
- Synthetic or mineral based lubricant transfer drum pumps
- Kerosene, diesel fuel or petrol transfer drum pumps
- Transmission and brake fluid transfer drum pumps
- Chemical, acid or solvent drum pumps
- Grease transfer drum pumps
- Bulk tank pumps
- Air operated diaphragm pumps

### Applications:

- Ideal for automotive, agriculture, mining, timber, food & beverage and other primary industries
- Suit contractors and construction engineers
- Use in workshops, car dealerships, foundries etc

### Description :

- The extensive range of Pirtek Greasing equipment facilitates the quick and efficient lubrication of plant and machinery, be it with the aid of simple grease nipples and grease guns or a multi-zoned, fully monitored lube system
- The new industry benchmark Series PL1 grease guns guarantee quick and easy greasing
- Strong technical back-up by our network will ensure that your lubrication problems are quickly and professionally solved

### Product Range:


- Grease nipples and grease nipple assortment kits
- Grease nipple extensions
- 450 gram grease guns
- Grease gun accessories
- 2.5kg, 20kg, 55kg and 180kg grease kits
- Grease control valves
- Grease swivels
- Grease hose reels
- Remote mount and manual grease kits
- Single, dual and multi line grease and oil systems

### Applications:

- Industry application includes industrial, automotive, agricultural, transport, mining, marine, petrochemical, construction, food processing, steel and aluminium plants, forestry, milk and dairy, aviation and much more.
- \* Please note when using grease gun couplers & grease gun hoses, the grease gun working pressure is rated to the lowest of the component's working pressure.

# LUBE EQUIPMENT

## GREASE GUNS

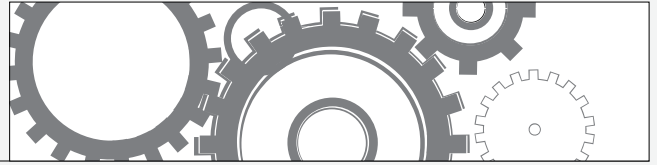

### PL100

#### STANDARD GREASE GUN

#### LEVER ACTION



Product Code	Description	Grease Capacity
PL100	Standard Lever Action Grease Gun	450 gram

- Capacity : 450 gm
- Grease cartridge / suction fill.
- Construction : Sheet metal Grease Gun head fitted with Bulk Loader.
- 150 mm steel extn. & standard 4 Jaw coupler
- Develops 6,000 PSI.
- Threaded : 1/8" BSPT
- Finish : Powder Coated Blue

### PL101

#### HEAVY DUTY GREASE GUN

#### LEVER ACTION



Product Code	Description	Grease Capacity
PL101	Heavy Duty Lever Action Grease Gun	450 gram

- Capacity : 450 gm
- Grease cartridge / Suction fill / Bulk Fill.
- Construction : Aluminum Die Cast Grease Gun head fitted with bulk loader & auto air bleeder
- Features : Built-In Variable Stroke, super strong lever handle with rubber grip
- 150 mm steel extension & professional 4 Jaw coupler
- Develops 10,000 PSI
- Threaded : 1/8" BSPT
- Finish : Powder Coated Blue
- 1 gram/stroke

### PL102

#### HEAVY DUTY GREASE GUN TO SUIT UNDERGROUND MINING

#### LEVER ACTION




Product Code	Description	Grease Capacity
PL102	Heavy Duty Lever Action Grease Gun Designed for Underground Coal Mining	450 gram

- Designed for Underground Coal Mining
- Capacity : 450 gm
- Grease cartridge / Suction fill / Bulk Fill.
- Construction : Zinc Die Cast Grease Gun head fitted with bulk loader & new air release valve
- Features : Built-In Variable Stroke, super strong lever handle with rubber grip
- 150 mm steel extension & professional 4 jaw coupler
- Develops 10,000 PSI
- Threaded : 1/8" BSPT
- Finish : Powder Coated Yellow
- 1 gram/stroke

# LUBE EQUIPMENT

## GREASE GUNS

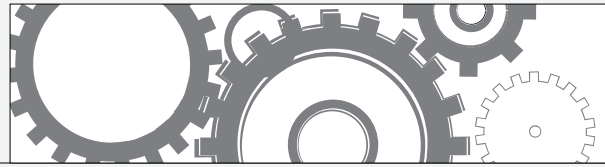

### PL104

#### LEVER ACTION GREASE GUN

#### CLEAR TUBE, HEAVY DUTY



Product Code	Intended Use	Grease Capacity
PL104	Clear Tube Heavy Duty Lever Action Grease Gun	450 gram

- Capacity : 450 gm
- Grease cartridge / suction fill / Bulk Fill.
- Construction : Aluminium Die Cast Grease Gun head fitted with bulk loader & automatic air bleeder.
- Features : Built-In Variable Stroke, super strong lever handle with rubber grip
- 150 mm steel extrn. & professional 4 Jaw coupler
- Develops 10000 PSI.
- Threaded : 1/8" BSPT
- Finish : Clear Tube with Aluminium Ends
- 1 gram/stroke

### PL105

#### MINI LEVER ACTION GREASE GUN



Product Code	Intended Use	Grease Capacity
PL105	Mini Lever Grease Gun	85 gram

- Capacity : 85 gm / 120 cc
- Grease cartridge / suction fill
- Construction : Aluminium Die Cast Grease Gun head fitted with steel block nut
- 150 mm steel extrn. & standard 4 Jaw coupler
- Develops 6000 psi
- Threaded : 1/8" BSPT
- Finish : Powder Coated Blue
- 0.55 gram/stroke

### PL111

#### PISTOL GRIP ACTION HEAVY DUTY GREASE GUN




Product Code	Description	Grease Capacity
PL111	Pistol Grip Grease Gun	450 gram

- Capacity : 450 gm
- Grease cartridge / suction fill
- Construction : Aluminium Die Cast Grease Gun head fitted with automatic air bleeder.
- 300 mm Hose & professional 4 Jaw coupler.
- Develops 5000 PSI.
- Threaded : 1/8" BSPT
- Finish : Powder Coated Blue
- 0.50 gram/stroke

# LUBE EQUIPMENT

## GREASE GUNS

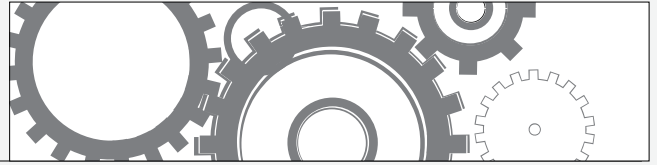

### PL112

HEAVY DUTY GREASE GUN TO SUIT  
UNDERGROUND MINING PISTOL GRIP



Product Code	Description	Grease Capacity
PL112	Heavy Duty Pistol Grip Grease Gun designed for underground coal mining	450 gram

- Pistol Grip Grease Gun
- Capacity : 450 gm
- Grease cartridge / suction fill
- Construction : Zinc Die Cast Grease Gun head fitted with automatic air bleeder
- 300 mm Hose & professional 4 Jaw coupler.
- Develops 5000 PSI.
- Threaded : 1/8" BSPT
- Finish : Powder Coated Blue
- 0.50 gram/stroke

### PL113

HEAVY DUTY GREASE GUN WITH  
VARIABLE OUTPUT PISTOL GRIP ACTION



Product Code	Description	Grease Capacity
PL113	Pistol Grip Grease Gun (Variable)	450 gram

- Pistol Grip Grease Gun
- Capacity : 450 gm
- Grease cartridge / suction fill / Bulk Fill
- Construction : Aluminium Die Cast Grease Gun head fitted with bulk loader valve.
- Features : Variable handle setting for High Pressure / high volume applications
- 300 mm High Pressure Hose & professional 4 Jaw coupler.
- Develops 7000 psi in High pressure setting & dispenses twice the amount of Grease compared to most other guns in high volume setting.
- Threaded : 1/8" BSPT
- Finish : Powder Coated Blue
- 0.90 gram/stroke

### PL114


CLEAR TUBE HEAVY DUTY GREASE GUN  
PISTOL GRIP ACTION



Product Code	Description	Grease Capacity
PL114	Clear Tube Heavy Duty Pistol Action Grease Gun	450 gram

- Clear Tube Pistol Action Grease Gun
- Capacity : 450 gm
- Grease cartridge / suction fill
- Construction : Aluminium Die Cast Grease Gun head fitted with automatic air bleeder.
- 300 mm Hose & professional 4 Jaw coupler.
- Develops 5000 psi
- Threaded : 1/8" BSPT
- Finish : Clear Tube with Aluminium Ends
- 0.50 gram/stroke



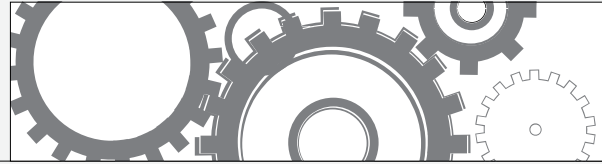

### PL115

#### MINI GREASE GUN

#### PISTOL GRIP ACTION



Product Code	Description	Grease Capacity
PL115	Mini Pistol Grease Gun with dual discharge ports (inline & 90 deg)	85 gram

- Capacity : 85 gm / 120 cc
- Grease cartridge / suction fill
- Construction : Aluminium Die Cast Grease Gun head fitted with steel block nut
- 100 mm steel extrn. & standard 4 jaw coupler
- Develops 3500 PSI
- Threaded : 1/8" BSPT
- Finish : Powder Coated Blue
- 0.40 gram/stroke

### PL120

#### AIR OPERATED HEAVY DUTY GREASE GUN

#### CONTINUOUS ACTION



Product Code	Description	Grease Capacity
PL120	Continuous Action Air Operated Grease gun	450 gram

- Capacity : 450 gm
- Grease cartridge / suction fill / Bulk Fill
- Construction : Aluminium Die Cast Grease Gun head fitted with bulk loader valve.
- 150 mm steel extrn. & professional 4 jaw coupler without ball check.
- Develops 4800 PSI.
- Threaded : 1/8" BSPT
- Finish : Powder Coated Blue
- Air inlet: 1/4" BSPT
- Pressure ratio 40:1
- 0.90 gram/shot
- Delivers 400 grams/minute
- Max air inlet pressure 3-8 bar (40-120 psi)

### PL125

#### HEAVY DUTY GREASE GUN

#### ELECTRIC

**PRODUCT**

**UNDER**


**DEVELOPMENT**

Product Code	Description	Grease Capacity
PL125	Heavy duty Electric Grease Gun	450 gram

- To be released 4th Qtr 2014

# LUBE EQUIPMENT

## GREASE GUN ACCESSORIES

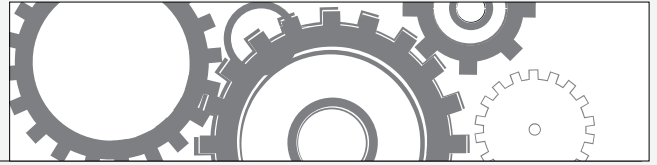

### PL140

#### PROFESSIONAL GREASE GUN COUPLER 4 JAW



Product Code	Description	Pressure Rating
PL140	Professional Grease Gun Coupler	6,000 psi

- Professional 4 Jaw Coupler with Ball Check
- 6000 psi / 415 Bar
- For Hand Operated Grease Guns
- 15mm diameter
- 1/8" BSPT

### PL141

#### HEAVY DUTY GREASE GUN COUPLER 4 JAW




Product Code	Description	Pressure Rating
PL141	Heavy Duty 4 Jaw Coupler	10,000 psi

- Heavy Duty 4 Jaw Coupler with Ball Check
- 10,000 psi / 690 Bar
- For Hand & Air Operated Grease Guns
- 17mm diameter
- 1/8" BSPT


### PL142

#### GREASE GUN COUPLER 90 DEGREE

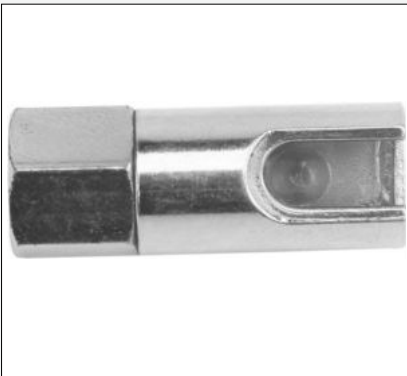

Product Code	Description	Pressure Rating
PL142	90 Degree Coupler without Ball Check	1,000 psi

- Hydraulic Coupler 90 Degree without Ball Check
- 1,000 psi / 69 Bar
- For hand operated Grease Guns
- 1/8" BSPT

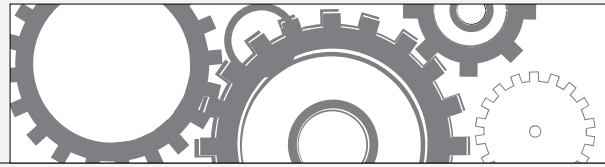

### PL143

#### HYDRAULIC COUPLER

#### 360° SWIVEL



Product Code	Description	Pressure Rating
PL143	Hydraulic Coupler 360 Deg Swivel	7,000 psi

- Hydraulic Coupler 360 deg, locks at any 45 deg position
- 3 Jaw with Ball Check
- 7,000 psi/483 bar
- For hand operated Grease Guns
- 1/8" BSPT

### PL144 & PL145

#### PUSH ON BUTTON HEAD COUPLERS

#### SUIT 16 mm & 20 mm BUTTON HEADS




Product Code	Description	Pressure Rating
PL144	Push On 16 mm Button Head Coupler	6,000 psi
PL145	Push On 22 mm Button Head Coupler	6,000 psi

- Push On Button Head Coupler for 16 mm and 22 mm Button Head Fittings.
- 6,000 psi/413 Bar
- 1/8" BSPT

### PL146

#### GREASE ACCESSORY KIT

#### QUICK CONNECT 7 PCE

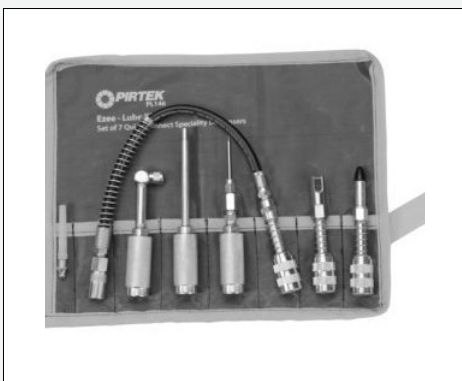


Product Code	Description	No. of Pieces
PL146	Quick Connect Grease Gun Accessory Kit	7

- 7 pc Quick Connect Grease Guns accessory Kit Including :-
- Professional Recessed Lube Adaptor
- Grease Injector Needle s/s 38 mm long
- Professional 90 deg Angle Lube Adaptor
- Professional Narrow Needle Nose Adaptor
- Jaw Type Coupler to Seal Off Dispenser
- Regular Coupler to Right Angled Coupler
- Quick Connect Hose

# LUBE EQUIPMENT

## GREASE GUN ACCESSORIES

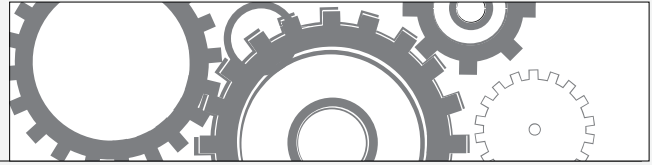

### PL150 - PL155

#### GREASE GUN HOSES

#### STANDARD & HIGH PRESSURE




Product Code	Standard Pressure (Hand Operated Guns) 240 Bar / 3,500 psi WP (11,600 psi BP)			High Pressure (Hand and Air Operated Guns) 400 Bar / 5,800 psi WP (13,775 psi BP)		
	Length mm			Length mm		
	200	300	450	300	450	700
PL150	•					
PL151		•				
PL152			•			
PL153				•		
PL154					•	
PL155						•

- High Pressure hoses are ideal for cold weather use
- All threads are 1/8" BSPT
- Standard Pressure Hose (OD = 8.5 mm, ID = 3.6 mm)
- High Pressure Hose (OD = 10.8 mm, ID = 4.1 mm)

### PL157

#### GREASE GUN EXTENSION

#### FLEXIBLE / RIGID COMBO

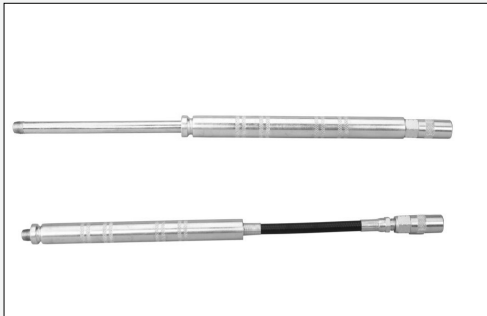

Product Code	Description	Pressure Rating
PL157	Flexible / Rigid Grease Gun Extension	5,000 psi

- 5000 psi / 345 Bar
- Converts Rigid Extn. To Flex. & vice versa
- Extends to 330 mm overall length

### PL158


#### GREASE GUN EXTENSIONS

#### BENT / STRAIGHT 2 PIECE PACK



Product Code	Description	Pressure Rating
PL158	Combo Straight and Bent Grease Gun Rigid Extensions	6,000 psi

- Combo Pack
- Includes one 150 mm Bent Steel Extn. & one 100 mm Straight Steel Extn.
- Threaded 1/8" BSPT
- 6000 psi / 413 Bar

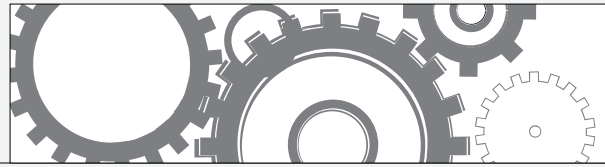

### PL159

#### GREASE GUN EXTENSION IN LINE SWIVEL JOINT



Product Code	Description	Threads
PL159	Grease Gun Extension Inline Swivel	1/8" BSPT Male x 1/8" Female

- Grease Gun Extension Swivel
- 1/8" BSPT Male x 1/8" BSPT Female
- 3000 psi / 240 Bar
- All steel construction

### PL160

#### GREASE GUN HOLDER SUITS 450 GRAM MANUAL GUNS



Product Code	Description	To Suit
PL160	Manual Grease Gun Holder	Suits 450 gram capacity guns

- Grease Gun Holder for 450 gram grease gun.
- Simple snap action clamp for safe storage of grease guns
- Steel construction, zinc plated finish

### PL161

#### GREASE GUN HOLDER SUITS HIGH VIBRATION LOCATIONS




Product Code	Description	To Suit
PL161	Heavy Duty Manual Grease Gun Holder	Suits 400 and 450 gram capacity guns

- Heavy Duty Grease Gun Holder for high vibration environment
- Works with both 400 gm capacity Grease Guns as well as 450 gram capacity Grease Guns
- All Steel construction with a 4 bolt design for easy & secure mounting

# LUBE EQUIPMENT

## GREASE GUN ACCESSORIES

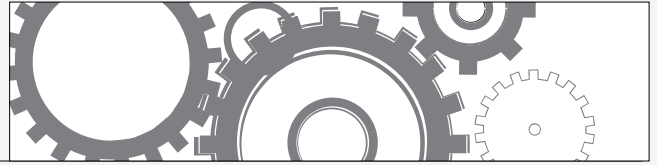

### PL162

LED LIGHT ATTACHMENT  
FOR GREASE GUNS



Product Code	Description	Includes
PL162	LED Grease Gun Light	Batteries, Mounting Clip

- LED Grease Gun Light
- Complete with batteries
- Includes mounting clamp that fits on Grease Gun Steel extension as well as flex hoses

### PL163

BULK LOADER / FILLER NIPPLE  
(SPARE PART)



Product Code	Description	Note
PL163	Bulk Loader / Filler Nipple	Spare Part

- Bulk Loader / Filler Nipple (Spare)
- (Spare part for Cartridge Grease Gun)
- 0.9mm diameter
- 1/8" BSPT

### PL164

AIR RELEASE VALVE  
(SPARE PART)




Product Code	Description	Note
PL164	Air Release Valve	Spare Part

- Air Release Valve (Spare)
- (Spare part for Cartridge Grease Gun)
- Vents air pockets in grease guns efficiently
- 1/8" BSPT



# LUBE EQUIPMENT

## GREASE FITTINGS

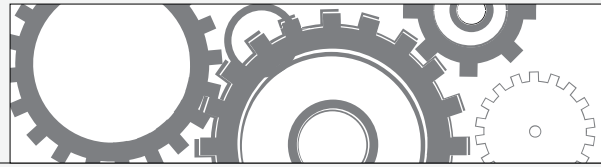

## PL170 - PL178

### GREASE NIPPLES



Product Code	BSPT			NPT			UNF	Metric		
	Str.	45°	90°	Str.	45°	90°	Str.	Str.	45°	90°
PL170	1/8"-28	-	-	-	-	-	-	-	-	-
PL171	-	1/8"-28	-	-	-	-	-	-	-	-
PL172	-	-	1/8"-28	-	-	-	-	-	-	-
PL173	1/4"-19	-	-	-	-	-	-	-	-	-
PL174	-	-	-	-	-	-	1/4"-28	-	-	-
PL175	-	-	-	-	-	-	-	M6x1	-	-
PL176	-	-	-	-	-	-	-	M8x1	-	-
PL177	-	-	-	1/8"-27	-	-	-	-	-	-
PL178	-	-	-	1/4"-18	-	-	-	-	-	-

- Head profile as per SAE J534 and DIN 71412 for Metric Fittings
- Heat treated Grease End & spring on ball check types
- Zinc plating exceeds ASTM B117
- Super strong rolled threads
- Salt Spray Tested
- Tested for operating, opening & back pressure

## PL180 - PL185

### GREASE NIPPLE ASSORTMENT - KITS



Product Code	Description	No. of Pieces
PL180	BSPT Assortment	50
PL182	Metric Assortment	80
PL184	SAE / NPT Assortment	80
PL185	St'less Steel SAE / NPT Assortment	40

#### BSPT Kits

(PL180)  
 1/8"-28 20 Straight  
 1/8"-28 5 45°  
 1/8"-28 5 90°  
 1/4"-19 10 Straight  
 1/4"-19 5 45°  
 1/4"-19 5 90°

#### Metric Kits

(PL182)  
 M6x1 20 Straight  
 M6x1 10 90°  
 M8x1 15 Straight  
 M8x1 10 90°  
 M10x1 15 Straight  
 M10x1 10 90°

#### SAE / NPT Kits

(PL184)  
 NPT 1/8"-27 25 Straight  
 NPT 1/8"-27 10 45°  
 NPT 1/8"-27 10 90°  
 SAE 1/4"-28 15 Straight  
 SAE 1/4"-28 10 45°  
 SAE 1/4"-28 10 90°

#### St'less Steel SAE / NPT Kits

(PL185) Grade 303 s/steel  
 NPT 1/8"-27 10 Straight  
 NPT 1/8"-27 5 45°  
 NPT 1/8"-27 5 90°  
 SAE 1/4"-28 10 Straight  
 SAE 1/4"-28 5 45°  
 SAE 1/4"-28 5 90°

## PL190 & PL191

### GREASE NIPPLE EASY OUT TOOL




Product Code	Description	Size
PL190	Grease Fitting Easy Out Tool 1/8"-27	Small
PL191	Grease Fitting Easy Out Tool 1/4"-28	Large

- PL190 - Small type hex size 5/16" & 3/8" (9mm)
- PL191 - Large type hex size 3/8" (9mm) & 7/16" (11mm)

# LUBE EQUIPMENT

## GREASE ACCESSORIES

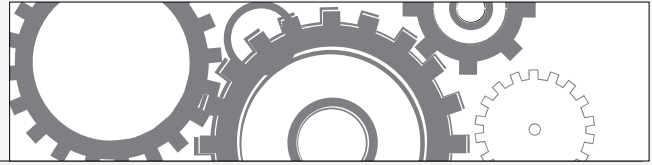

### PL192

#### GREASE FITTING UNBLOCKER



Product Code	Description	Note
PL192	Grease Fitting Unblocker	Ideal for Toolbox

- Opens clogged grease fittings and loosens hardened grease joints
- Excellent for maintaining and protecting bearings, control arms, joints, king pins, etc.
- Tool has an all steel construction & is designed to be tapped with a hammer to force a light viscosity oil through the tool into the coupler & finally into the grease joint, breaking up and removing dirt and debris
- Built-In Hand Guard for added safety in use
- Flexible hose attachment reaches fittings in difficult areas
- Comes complete with grease coupler for connection onto the grease fitting and 2 spare seals for replacing the piston seals as they wear out

### PL193

#### GREASE FITTING CAPS

##### AVAILABLE IN 3 COLOURS



Product Code	Description	Pack Size
PL193R	Red Grease Fitting Cap	50
PL193Y	Yellow Grease Fitting Cap	50
PL193B	Black Grease Fitting Cap	50

- Plastic Caps for Grease fittings are an easy way to keep contaminants out.
- These additionally help in colour coding the greasing points based on frequency of greasing or type of grease
- Designed with an inbuilt collar, these are most convenient in use & fit directly onto the greasing end of the fitting
- Made from a special plastic, these adjust to minor variations in fitting head diameter, as well as variations in temperature & practically fit all standard fittings designed for use with jaw type couplers
- Available in Black, Yellow and Red as standard with other colours that can be custom manufactured
- Sold in packs of 50

### PL194

#### GREASE FITTING THREAD TESTER




Product Code	Description	Note
PL194	Grease Fitting Thread Tester	Ideal for Toolbox

- Great tool box accessory to sort out mixed fittings
- Aluminium construction with mounting holes
- Dimensions: 75mm x 207 mm
- Checks the tabulated 21 popular thread sizes

NPT	1/8"	1/4"	3/8"	
Metric	M6 X 1	M6 X 0.75		
Metric	M8x1	M8x1.25		
Metric	M10x1	M10x1.5		
BSPT	1/8"	1/4"		
UNF/ANF	1/4"	5/16"	3/8"	
BSW	1/4"	5/16"	1/2"	3/8"
BSF	3/16"	1/4"	5/16"	

This page is part of a complete catalogue containing technical and safety data. All data must be reviewed when selecting a product. Pirtek reserve the right to change technical specifications without notice.

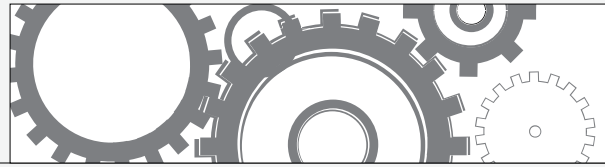

### PL300

#### 20 KG GREASE GUN LOADER PUMP



Product Code	Description	Dimensions
PL300	20 kg Grease Gun Loader Pump	Suits 310 mm Drum Covers

- Easy to use Grease filling solution to load bulk or combination grease guns from bulk grease pails
- Delivers 28 grams per stroke
- No mess or waste. Full economy in buying bulk grease
- Complete unit includes zinc plated pump with zinc die cast pump head and cast aluminium adjusting flange, drum cover follower plate & female loader fitting
- Brass piston rings mounted on zinc die cast piston for minimal wear
- Includes follower plate with rubber lining for use with tapered drums

#### RECOMMENDED USE

For Light & self Collapsing Grease up to and including NLGI 2

### PL305

#### FOOT OPERATED GREASE PUMP



Product Code	Description	Stroke Capacity
PL305	10 kg Grease Kit	2 grams per stroke

- High Pressure Portable Grease Pump for quick effortless greasing in everyday lubrication such as greasing of excavators & other earth moving equipment, agricultural equipment, automotive etc.
- Hands free operation; pump operates using the Foot Lever, which greatly reduces effort & allows high pressure greasing with highest comfort
- Can be operated by hand when under low machinery
- Economical, pump is operated by a single person & uses low cost bulk grease
- Designed with all moving parts submerged in the same grease which needs to be pumped, thereby staying lubricated at all times
- Moving parts create wave action in grease, auto removing air pockets & eliminating the use of a Follower plate
- Pump delivers over 2 gms of grease per stroke & develops 8,700 psi (600 bar)
- Supplied with 2 metres of 1/4" hose
- Works with NLGI 1, 2 & 3 Greases

### PL310

#### AIR OPERATED 50:1 RATIO GREASE PUMP (PUMP ONLY) SUIT 180 KG DRUM



Product Code	Description	To Suit
PL310	50:1 Ratio Air Assisted Grease Pump	Suits 180 kg Drums


- Suitable for use with 180 kg drums (PUMP ONLY)
- Air Inlet 1/4" (Female), Pump Outlet 1/4" (Female) BSPT
- Working Pressure 30 - 150 psi.
- World-class Industrial High Pressure Grease pump with guaranteed performance & hassle free operation
- Pump dispenses Grease at pressures up to 50 times the Air inlet pressure
- Designed to work in tough conditions
- Ideal for use in Industry, workshop, farm, construction or as part of the Mobile Grease system
- All metal construction, fully CNC machined with hardened wear resistant moving parts
- Reciprocating piston operated 2.5" (63 mm) dia. Air Motor
- Fitted with strainer at suction tube inlet for clean grease to the bearing
- Flow - 1.1Kg per minute free flow (dependant on grease properties & temperature)
- Maximum pressure at air inlet 2-10 bar (30-150 psi)

This page is part of a complete catalogue containing technical and safety data.

All data must be reviewed when selecting a product.

Pirtek reserve the right to change technical specifications without notice.

LUBE EQUIPMENT  
BULK GREASE EQUIPMENT

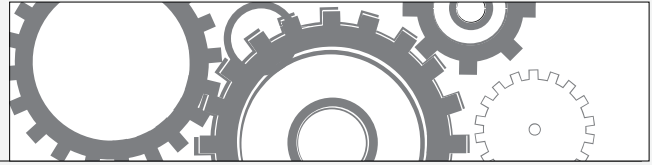

PL311

AIR OPERATED 50:1 GREASE RATIO PUMP (COMPLETE KIT)  
SUITS 180 KG DRUMS



Product Code	Description	To Suit
PL311	50:1 Ratio Air Assisted Grease Pump	Suits 180 kg Drums

- Suitable for use with 180 kg drums
- Air Inlet 1/4" (Female), Pump Outlet 1/4" (Female) BSPT
- Working Pressure 30 - 150 psi.
- World-class Industrial High Pressure Grease pump with guaranteed performance & hassle free operation
- Pump dispenses Grease at pressures up to 50 times the Air inlet pressure
- Designed to work in tough conditions
- Ideal for use in Industry, workshop, farm, construction or as part of the Mobile Grease system
- All metal construction, fully CNC machined with hardened wear resistant moving parts
- Reciprocating piston operated 2.5" (63 mm) dia. Air Motor
- Fitted with strainer at suction tube inlet for clean grease to the bearing
- Complete with 2 mtr of 1/4" of high pressure hose, Z Swivel, control valve, 24-1/2" drum cover & follower plate
- Delivers 1.1 kg per minute Free Flow - (Dependant on grease properties and temperature)
- Maximum air inlet pressure 2-10 bar (30-150 psi)

PL315

AIR OPERATED 50:1 GREASE RATIO PUMP  
MOBILE 30 KG GREASE KIT



Product Code	Intended Use	Discharge Rate
PL315	Air Operated 30 kg Mobile Grease Kit	1.1 kgs per minute

- World-class Industrial High Pressure Grease pump with guaranteed performance & hassle free operation
- Pump dispenses grease at pressures up to 50 times the Air inlet pressure.
- Designed to work in tough conditions - ideal for use in Industry, workshop, farm, construction or as part of a Mobile Grease system
- All metal construction, fully CNC machined with hardened wear resistant moving parts
- Reciprocating piston operated 2.5" (63 mm) dia. Air Motor
- Fitted with strainer at suction tube inlet for clean grease to the bearing
- Supplied complete with built-in Steel Drum, wheels & pull handle, Drum Cover, rubber lined Follower Plate, 2 meters of high pressure 1/4" Grease Hose, Z swivel & professional Grease Control Valve
- Maximum air inlet pressure 2-10 bar (30-150 psi)

PL320 & PL321

FOLLOWER PLATES  
SUIT 20 KG / 180 KG DRUMS



Product Code	Intended Use	Dimensions
PL320	20 kg Drum Follower Plate	288 mm OD, 29.5 mm Grommet
PL321	180 kg Drum Follower Plate	602 mm OD, 29.5 mm Grommet

- Rubber Lined Follower Plate




## PL322 & PL324 DRUM COVERS SUIT 20 KG / 180 KG DRUMS



Product Code	Intended Use	Description
PL322	20 kg Drum Cover	Drum Cover Complete
PL324	180 kg Drum Cover	Drum Cover Complete

## PL325 & PL326 REPAIR KITS \* AIR MOTOR AND PUMP CHAMBER KITS

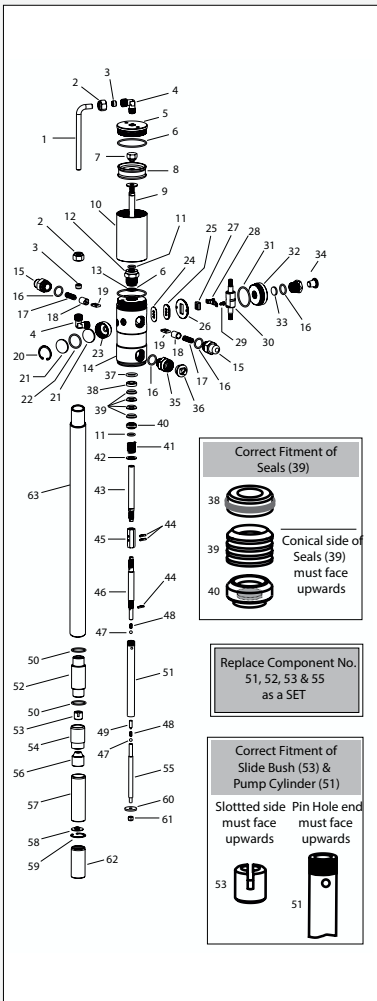


Product Code	Intended Use	Drum Capacity
PL325	Air Motor Kit To Suit PL310/PL311 Pumps	180 kg Drums
PL326	Pump Chamber Kit To Suit PL310/PL311 Pumps	180 kg Drums

KIT PART NO.	KIT DESCRIPTION	CONSTITUENT PART NO.	PART DESCRIPTION	REFERENCE NO. FROM PARTS DRAWING	QTY. PER KIT
PL325	DRIVE SECTION KIT	SR/B/RP	Sealing Ring	3	2
		BEND/90/RP	Bend	4	2
		ORG/BS141	O Ring	6	2
		ORG/BS614	O Ring	11	2
		ORG/BS617	O Ring	16	4
		ORG/BS121	O Ring	22	1
		SEL/P/RP	Paper Seal	24	1
		SET/RP	Seat	25	1
		SLD/NY/RP	Nylon Slider	27	1
		CLP/RP	Clip	28	1
		SCR/M4/RP	Self Tapping Screw	29	2
		ORG/BS129	O Ring	31	1
		ORG/BS614	O Ring	37	1
		GUD/SEL/RP	Slider Guide	38	1
		SEAL/RP	Seal	39	4
		SU/SEL/RP	Seal Support	40	1
		ROD/CNR/S/RP	Connecting Rod	43	1
SSP/3/0.6/15.3	Slotted Spring Pin	44	3		
PL326	PUMPING SECTION KIT	SB/7-32	Steel Ball (7/32")	47	2
		SPR/NR/RP-G	Non Return Spring	48	2
		VLV/RP-G	Valve	49	1
		ORG/BS812	O Ring	50	2
		CYL/RP-G	Pump Cylinder	51	1
		CPL/TOP/RP-G	Top Coupler	52	1
		BSH/SLD/RP-G	Slide Bush	53	1
		ROD/PST/RP-G	Piston Rod	55	1
		BSH/RP-G	Guide Bush	56	1
		WSR/PST/RP-G	Piston Washer	60	1
		NN/M6/RP-G	Nyloc Nut	61	1
		IC/FLT/RP-G	Filter Cap	62	1

\* REFER TO THE INDIVIDUAL INSTALLATION, OPERATION & MAINTENANCE MANUALS

# LUBE EQUIPMENT

## GREASE ACCESSORIES

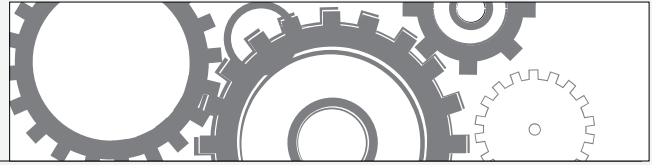

### PL330

#### GREASE CONTROL VALVE



Product Code	Contains	Inlet
PL330	Control Valve with 150mm bent extension	1/4" BSPT Female Inlet Thread

- Premium quality grease control valve for use with air operated grease pumps
- Provides continuous grease flow with trigger fully pressed
- Steel construction for durability & longevity
- Ergonomically designed pistol handle
- Comes complete with 6" steel extension & heavy duty coupler
- Available as valve only
- Suited to underground coal mining (all steel construction)
- 7500 psi / 517 Bar
- Can be fitted with Z-Swivel (Refer PL340)

### PL331

#### BOOSTER GREASE CONTROL VALVE



Product Code	Contains	Inlet
PL331	Control Valve with 150mm bent extension	1/4" BSPT Female Inlet Thread

- Heavy Duty Grease control valve with built-in pressure boost mechanism.
- Provides continuous flow with pistol handle fully pressed
- Pressure boost achieved through repeated actuation of the pistol handle. Boosts line pressure from 6,000 PSI (400 BAR) to 10,000 PSI (690 BAR); extremely useful to unblock frozen grease fittings
- Heavy Duty steel construction, provides durability & longevity
- Ergonomically designed pistol handle
- Available as valve only
- Comes complete with 6" (150 mm) steel extension & coupler
- Suited to underground coal mining (all steel construction)
- Can be fitted with Z-Swivel (Refer PL340)

### PL332

#### GREASE CONTROL VALVE INTEGRATED DIGITAL METER



Product Code	Description	Inlet
PL332	Grease Control Valve - Electronic	1/4" BSPT Female Inlet Thread

- Premium quality Grease Control valve, for use with air operated grease pumps
- Built-In High Accuracy Digital Grease Meter for dispensing exact amount of grease
- Ability to measure amount of grease dispensed prevents both over & under lubrication & is invaluable in saving bearing failures
- Provides continuous grease flow, with trigger fully pressed
- Steel construction, provides durability & longevity. Meter uses oval gear technology
- Ergonomically designed pistol handle
- Comes complete with 6" (150mm) steel extension & heavy duty coupler
- Max pressure 8,000 psi / 550 Bar
- Unit of measure = Kgs
- Batteries included

### PL340

#### GREASE 'Z' SWIVEL




Product Code	Contains	Threads
PL340	10,000 psi 'Z' Swivel	1/4" BSPT Male / Female Threads

- Installed between the delivery hose & grease control valve, swivels permit easy handling of control valves and prevent damage to hose caused by twisting
- Swivels have a heavy duty steel construction with ball bearings for smooth operation and free unrestricted movement
- The swiveling joints are hardened for durability & wear resistance

This page is part of a complete catalogue containing technical and safety data.  
 All data must be reviewed when selecting a product.  
 Pirtek reserve the right to change technical specifications without notice.



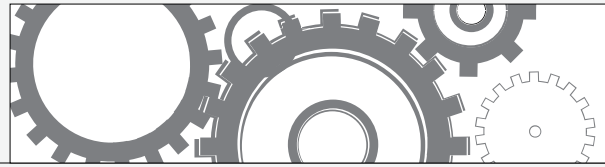

## PL341

### HYDRAULIC COUPLER

### 3 JAW COUPLER FOR GREASE CONTROL VALVES



Product Code	Description	Pressure Rating
PL341	3 Jaw Coupler with Ball Check	7,500 psi / 517 Bar

- Recommended for use with grease control valves
- Hardened coupler body & all internal parts withstand high dynamic pressures without deformation
- Fully hardened reversible spring steel jaws for extended service life
- Hexagonal nut for easy tightening
- 100% pressure tested
- 1/8" BSPT (female)

## BEKA MAX 20

### 20 POINT AUTOMATIC LUBE SYSTEM

### REGULAR PRECISE LUBRICATION SYSTEM



Product Code	Description	Capacity
BEKA MAX 20	Automatic Lube System	Can supply up to 20 points

#### KIT CONTENTS:

- 24V DC Pump Station
- Onboard timer
- 4Kg Grease Reservoir
- 70 metres grease filled hose
- Reuseable hose ends
- Cable ties
- Hose wrapping
- Compression fittings and adaptors
- Mounting nuts and bolts
- Sufficient to supply 20 grease points automatically

The 24 volt DC BEKA-MAX pump is controlled by its own integral timer with adjustability for pump off time and pump on time. Grease is delivered through individual pump units to progressive distributors. A rotating charging arm in the reservoir forces grease downwards to the inlet of the pump element (maximum of 3) and via a high pressure hose to each progressive distributor.

The distributors apply grease to each connected bearing, and have a pressure capability of up to 280 bar. The system can be tested, or an additional lubricating cycle can be achieved, with a manual push-button switch.

The progressive distributor element is of modular construction and consists of between 3 and 10 elements; different sizes of distributor-element are provided to enable a wide variety of bearings to be greased. The modular construction of this unit enables the number of outlets to be increased or decreased simply, according to your technical specifications. In the event of a progressive distributor blockage, for example caused by excessive back pressure at the bearing, warning will be given.

The design and construction of this powerful piston pump, when matched with the progressive distributors, enables it to operate reliably with greases up to NLGI class 2. Effective for ambient working temperatures between -35° and +80°C

The system provides automatically the exact amounts of grease, and is therefore the ideal lubrication for commercial vehicles.

The significant advantages of centralised grease lubrication with BEKA-MAX are as follows:

- Because the grease is carefully measured, wastage is kept to an absolute minimum- environmentally friendly
- A reduction in wear of component parts results in lower material and repair costs
- Bearing failure leading to loss of production is eliminated
- The working life of machine parts is extended significantly
- Manual lubrication is eliminated saving hundreds of labour hours over the life of the vehicle


Choose between fully automated, semi automatic or fully manual systems

- Fast and efficient
- No points can be missed
- Bearings last longer
- No climbing or crawling - safer

Save the environment and your plant. Up to 5 times the amount of liquid grease- for example NLGI class 00- is required to provide the same lubrications performance as NLGI class 2. Hot weather, frequent wash down and dust make the problem worse.

# LUBE EQUIPMENT

## OIL PUMPS

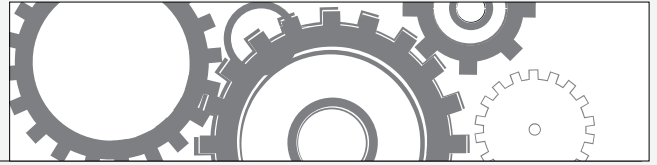

### PL400

#### LEVER ACTION DRUM PUMP TO FIT 20 - 205 LITRE DRUMS



Product Code	Description	Capacity
PL400	Lever Action Drum Pump with NBR seals	300 ml per stroke

- Most popular pump design, engineered for professional use
- Powder coated steel pump body with ribbed section aluminum die cast pump head for maximum strength
- Built-in 1.1/2" & 2" bung for use on drums with either openings
- Plated steel lever handle with rubber grip for convenience
- Wear resistant Brass piston rings fitted onto zinc die cast piston
- Comes complete with curved metal spout & telescopic suction tube for use on 50 litre – 205 litre barrels
- Suited to oil based fluids, heating oils, motor oils, heavy and light oils, kerosene and diesel
- Not suited for water based fluids, solvents, acids, anti-freeze, or petrol

### PL401

#### CLEAR TUBE LEVER ACTION DRUM PUMP TO FIT 20 - 205 LITRE DRUMS



Product Code	Description	Capacity
PL401	Clear Tube Lever Action Drum Pump	300 ml per stroke

- Professional Barrel pump for pumping all types of oils
- Tough & Impact Resistant Polycarbonate tube with die cast aluminum adaptors
- Ribbed section Aluminum Die Cast pump head for maximum strength
- Nitrile Rubber Piston rings for smooth operation
- Built-in 1-1/2" & 2" bung for use on drums with either opening
- Delivers 300 ml (10 oz.) per stroke
- Comes complete with curved metal spout & telescopic suction tube for use on 50 litre – 205 litre barrels
- Suited to oil based fluids, heating oils, motor oils, heavy and light oils, kerosene and diesel
- Not suited for water based fluids, solvents, acids, anti-freeze, or petrol
- Transparent barrel facilitates monitoring of lubricant cleanliness


### PL402

#### PROFESSIONAL ROTARY DRUM PUMP TO FIT 20 - 205 LITRE DRUMS



Product Code	Description	Capacity
PL402	Professional Rotary Drum Pump	250 ml per turn

- Most popularly used pump worldwide.
- The Pirtek version of the Rotary Pump is superior to any other with features such as Dual Directional Operation which allows the pump to both empty, as well as refill containers
- Extremely Heavy Duty & rugged weighing 6.6 kgs (14.5 lbs)
- Pump body is sturdy cast iron with precisely machined cast iron vanes for better draw & smoother delivery
- Pump seals are made from Viton
- Fits 50 litre to 205 litre barrels
- 1" threaded inlet at base of pump housing
- Comes complete with suction tube, 2" cast iron bung nut & discharge spout
- NOTE: Add 30 ml of the fluid to be pumped into the pump outlet to assist priming when transferring low viscosity fluids such as kerosene or diesel

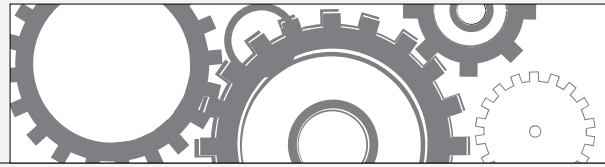

### PL404

#### EZEE FLOW DOWNSTROKE PUMP FOR 20 LITRE DRUMS



Product Code	Description	Capacity
PL404	Ezee Flow Downstroke Pump	18 strokes per litre (56 ml per stroke)

- Versatile pump, engineered for trouble free use on 5 gallon / 20-25 litre containers with plastic pull out (Rieke® spout) or 2" external threads
- Downstroke operation with fluid discharge when pushing the handle down. Enhanced ease of use & reduced fatigue especially when pumping heavy fluids. It additionally reduces pull out stress on the pump bung
- Heavy duty steel suction tube, with the pump head made from high density polyethylene. Pump head incorporates nozzle holder & option to drain back over flown fluid into the container
- Interchangeable bung adaptors. The standard bung adaptors can be slid over the pump, when using on containers with external threading. Alternatively, when using the pump on pails with plastic pull out Rieke® spout, the other bung adaptor for Rieke® spout can be used. Choice of 7 adaptors makes the pump good for use with most metal & plastic containers
- Pump length can be extended by over 100 mm for use on extra depth containers, by conveniently sliding the suction tube extender
- Supplied complete with rigid steel discharge spout & 1200 mm long spring reinforced non kinking discharge hose fitted with non drip spout

### PL410, PL411 & PL412

#### MANUAL OIL SUCTION GUNS STEEL OR POLYCARBONATE BARREL



Product Code	Description	Capacity
PL410	Manual Oil Suction Gun Black Barrel	500 ml
PL411	Manual Oil Suction Gun Clear Barrel	500 ml
PL412	Manual Transfer Gun - 2 vinyl tubes	350 ml

- Rugged transfer guns designed for use with gear oils to get them both into and out of gear boxes, transfer cases and differentials
  - Deluxe lip seal provides maximum suction
  - Steel Barrel in premium powder coated finish (**PL410 & PL412**)
  - Clear polycarbonate barrel for oil condition monitoring (**PL411**)
  - Aluminium Die cast Head
  - Fully serviceable
  - Needs no priming
  - Suitable for use with non corrosive liquids
- SUCTION GUNS
- Supplied with 300 mm of clear vinyl suction tube
- TRANSFER GUN
- Supplied with 1200 mm of clear vinyl tube for each valve

### PL414

#### MANUAL OIL LEVER GUN




Product Code	Description	Capacity
PL414	Manual Oil Lever Gun	500 ml - 10,000 psi

- Heavy Duty Oil Gun handles flowable greases & light oils without leakage
- High Quality Steel Barrel with fully machined seam for leak proof operation
- Grease Gun Follower designed for use with both Oils & Grease & works with 14 oz. (400 gm) Grease cartridge or 500 cc Bulk without the need to flip the follower
- Develops up to 10,000 psi / 690 bar
- Variable stroke feature built in for use in confined areas
- High Tolerance Aluminum Die Cast Gun Head
- Complete with a 150 mm steel extension & professional 4 jaw coupler with ball check

# LUBE EQUIPMENT

## OIL PUMPS AND DISPENSING

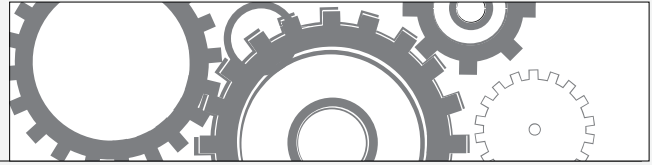

### PL417

#### PREMIUM OIL SPIGOT/DISPENSER




Product Code	Description	Thread
PL417	Oil Spigot/Dispenser for Air Operated Oil Pumps	1/2" BSP Female

- Professional quality Oil Spigot in premium chrome plated finish
- Used to construct oil bars or direct with air operated oil pumps as a dispenser
- Spring loaded dispensing mechanism CNC machined for non-drip operation
- Nitrile Seals
- Handles up to 800 psi (55 bar)

### PL430 - PL435

#### AIR OPERATED OIL PUMPS

1:1 3:1 5:1 RATIOS

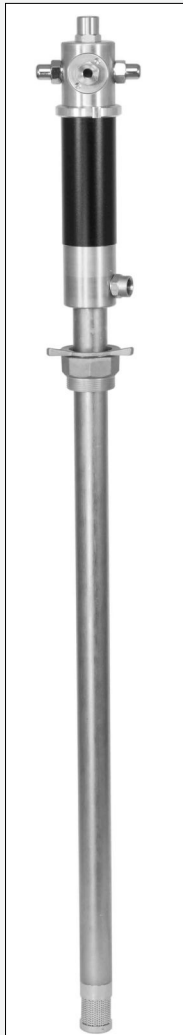

Product Code	Ratio	Description	Flow Capacity litres / min
PL430	1:1	Air Operated Oil Pump Stub Version with Bung	42
PL431	1:1	Air Operated Oil Pump complete to suit 205 litre drums	42
PL432	3:1	Air Operated Oil Pump Stub Version with Bung	14
PL433	3:1	Air Operated Oil Pump complete to suit 205 litre drums	14
PL434	5:1	Air Operated Oil Pump Stub Version with Bung	18
PL435	5:1	Air Operated Oil Pump complete to suit 205 litre drums	18

**NOTE:** All pumps have 1/4" BSP air inlet, 1/2" BSP Female oil outlet, 1" BSP Female Suction Tube thread

#### 1:1 Ratio Pumps

- Transfer pump, used to quickly transfer oils from large drums to smaller containers. These have a Double Acting operation with discharge up to 40 lpm (8.80 imp. gpm).
- Ideal for use with low to medium viscosity (up to SAE 80 Oils) for transferring over short distances (5 metres)
- Air Consumption: 270 lpm (59.40 imp. gpm), max air pressure 115 psi / 8 Bar


#### 3:1 Ratio Pumps

- Amongst the most popular general purpose air operated pumps worldwide
- Pumps are single acting with discharge up to 14 lpm (3.08 imp. gpm)
- Ideal for use with medium to high viscosity oils (up to SAE 130) for transferring over distances (up to 30 metres), mostly used with Trolley mounted kits
- Air Consumption: 230 lpm (50.60 imp. gpm), max air pressure 115 psi / 8 Bar

#### 5:1 Ratio Pumps

- High Pressure air operated pumps for dispensing oil at 5 times the pressure as the air inlet
- Pumps are double acting with discharge up to 18 lpm (3.96 imp. gpm)
- Ideal for use with high viscosity oils (up to SAE 240) for transferring over short & long distances (up to 50 metres), mostly used with Trolley mounted kits both with & without Hose Reels, as well as with fixed systems for centralized distribution
- Air Consumption: 250 lpm (55.0 imp. gpm), max air pressure 115 psi / 8 Bar

**NOTE:** Wall Mounting brackets and IBC mounting kits available

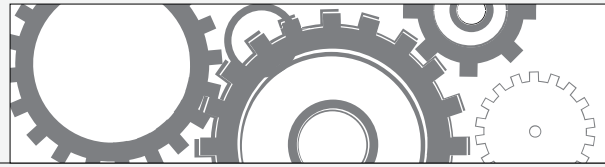

## PL440

### DIE CAST DRUM BUNG INTEGRATED WING NUT



Product Code	Description	Size
PL440	Die Cast Drum Bung	42 mm Inside Diameter

- Aluminum Die cast 2" Drum Bungs for use primarily with Air Operated Pumps
- Bungs can be adjusted anywhere on the suction tube & tightened using the Wing Nut
- Zinc Die cast Locking Nut inside holds the suction tube
- 42 mm Inside Diameter
- Standard equipment on all Pirtek Air Operated Oil Pumps

## PL444 - PL449

### SPARE PARTS FOR PIRTEK LUBE PUMPS

*REFER TO THE  
INDIVIDUAL  
INSTALLATION,  
OPERATION &  
MAINTENANCE  
MANUALS*

Product Code	Description
PL444	Spares to Suit PL430 / PL431 1:1 Ratio Air Motor Oil Pump Kit
PL445	Spares to Suit PL430 / PL431 1:1 Ratio Air Motor Non Return Valve Kit
PL446	Spares to Suit PL430 / PL431 1:1 Ratio Seal Kit
PL447	Spares to Suit PL430 / PL431 1:1 Ratio Piston Kit
PL448	Spares to Suit PL432 / PL433 3:1 Ratio Oil Pump Kit
PL449	Spares to Suit PL434 / PL435 5:1 Ratio Oil Pump Kit

Refer to instruction manual and/or the Pirtek Webcatalogue for list of spare parts supplied.

## PL450

### MECHANICAL OIL METER




Product Code	Description	Measurement Range
PL450	Mechanical Oil Meter	1 - 30 litres / minute

- High pressure positive displacement meter suitable for in-line and end of line applications
- Oval gear mechanism for optimum accuracy
- High reliability Mechanical Display
- Robust Aluminum Die Cast construction with protective shroud on meter
- Accuracy  $\pm 1\%$
- Repeatability  $\pm 0.2\%$
- Measures Litres with Reset capability
- RECOMMENDED USE  
Oils with viscosity up to 2000 cSt, Diesel, Biodiesel
- DO NOT USE WITH  
Water based media, Petrol etc.
- Max pressure 1000 psi / 70 Bar
- 1/2" BSP Female
- Bottom entry, top outlet

# LUBE EQUIPMENT

## OIL ACCESSORIES

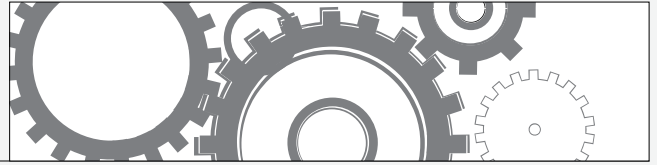

### PL451

#### ELECTRONIC IN-LINE OIL METER



Product Code	Description	Features
PL451	Electronic Digital in-Line Meter	1-30 litres /min at up to 70 bar WP

- High pressure positive displacement meter suitable for in-line and end of line applications
- Oval gear mechanism for optimum accuracy
- Electronic Display using two 1.5V batteries
- Robust Aluminium Die Cast construction
- Measures in Litres, Quarts, Pints & Gallons
- Accuracy  $\pm 0.5\%$
- Repeatability  $\pm 0.3\%$
- Easy user re-calibration
- Working Pressure 70 bar Burst Pressure 140 bar
- Pressure Loss 0.7 bar
- Max. Resettable Batch Total 99,999 units
- Non-Resettable Totalisator 9,999,999 Units
- Least Count Resolution 0.001 Units
- Water Resistance IP55
- Temp. Range:  $-10^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$
- 1/2" BSPT inlet & outlet threads
- Bottom entry, top outlet
- Batteries included

#### RECOMMENDED USE

- Oils with viscosity up to 5000 cSt, Diesel, Biodiesel

#### DO NOT USE WITH

- Water based media, Petrol etc.
- Not approved for metering commercial sales of media

### PL460

#### OIL CONTROL GUN WITH SWIVEL c/w NON DRIP NOZZLE



Product Code	Description	Features
PL460	Oil Control Gun with Swivel / Nozzle	Up to 70 litres /min and 60 bar WP

- For use with Air Operated Oil Pumps up to 6:1 Pressure ratio
- Gun dispenses by simple press of the trigger
- Built-in safety clip can be slid over the trigger for continuous un-attended dispensing; or alternatively under the trigger to lock & prevent accidental dispensing
- Slim construction of the steel outlet spout allows the gun to be used to fill small openings
- Built-in swivel threaded at inlet for easy maneuverability
- Standard configuration includes steel outlet extension and non drip nozzle
- Temp. Range:  $-10^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$
- 1/2" Female BSPT Swivel Inlet
- 1/2" OD Steel Extension


#### RECOMMENDED USE

- Oil, Gear Lube, ATF

#### DO NOT USE WITH

- Water based media, Petrol etc.



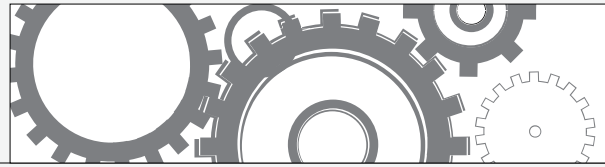

### PL461

#### MECHANICAL OIL CONTROL GUN WITH SWIVEL

c/w NON DRIP NOZZLE



Product Code	Description	Features
PL461	Mech. Oil Control Gun with Swivel / Nozzle	0.3 to 8 litres /min and 60 bar WP

- High accuracy light weight gun for controlling fluid deliveries in most demanding applications
  - Oval gear mechanism for optimum accuracy
  - Accuracy  $\pm 1\%$
  - Repeatability  $\pm 0.2\%$
  - Temp. Range:  $-10^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$
  - Max. Resettable Batch Total 99,999 units
  - Non-Resettable Totalisator 9,999,999 Units
  - Least Count Resolution 0.1 Units
  - Water Resistance IP55
  - High Reliability Mechanical display
  - Aluminum Die cast meter body
  - Gun with Impact & Weather resistant nylon construction
  - Built-in safety clip can be slid over the trigger for continuous un-attended dispensing; or alternatively under the trigger to lock & prevent accidental dispensing
  - Built In swivel at inlet for easy maneuverability
  - Supplied complete with rigid steel or hose extension, fitted with manual non drip nozzle
- RECOMMENDED USE**
- Oils with viscosity up to 2000 cSt, Diesel, Biodiesel
- DO NOT USE WITH**
- Water based media, Petrol etc.

### PL462

#### ELECTRONIC OIL CONTROL GUN WITH SWIVEL

c/w NON DRIP NOZZLE




Product Code	Description	Features
PL462	Electronic Oil Control Gun with Swivel / Nozzle	1 to 30 litres /min and 60 bar WP

- High accuracy light weight gun for controlling fluid deliveries in most demanding applications
  - Oval gear mechanism for optimum accuracy
  - Accuracy  $\pm 0.5\%$
  - Repeatability  $\pm 0.3\%$
  - Temp. Range:  $-10^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$
  - Max. Resettable Batch Total 99,999 units
  - Non-Resettable Totalisator 9,999,999 Units
  - Least Count Resolution 0.1 Units
  - Water Resistance IP55
  - Electronic Display using two 1.5V batteries
  - Aluminum Die cast meter body
  - Gun with Impact & Weather resistant nylon construction
  - Built-in safety cum continuous Flow lever can be slid over the trigger for continuous unattended dispensing; or alternatively under the trigger to lock & prevent accidental dispensing
  - Built In swivel at inlet for easy maneuverability
  - Measures in Litres, Quarts, Pints & Gallons
  - Easy user re calibration
  - Supplied complete with rigid steel extension or hose extension, fitted with manual non drip nozzle
  - Batteries included
- RECOMMENDED USE**
- Oils with viscosity up to 5000 cSt, Diesel, Biodiesel
- DO NOT USE WITH**
- Water based media, Petrol etc.

# LUBE EQUIPMENT

## OIL ACCESSORIES

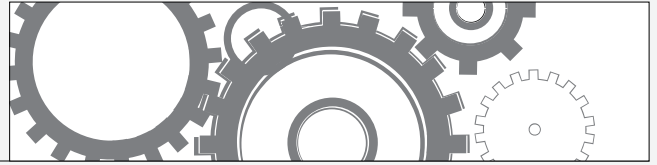

### PL465

#### OIL METER SWIVEL




Product Code	Description	Threads
PL465	Oil Meter Swivel	1/2" BSPT Male - Female

- Swivel Adaptor for Oil Meters / Hose End Guns
- Large 1/2" (13 mm) inner dia. for least resistance to flow
- Steel construction with bright zinc plated finish
- Threaded 1/2" BSPT (M) x 1/2" BSPT (F)
- 103 bar(1,500 psi) rating

### PL466

#### AUTOMATIC NON DRIP NOZZLE

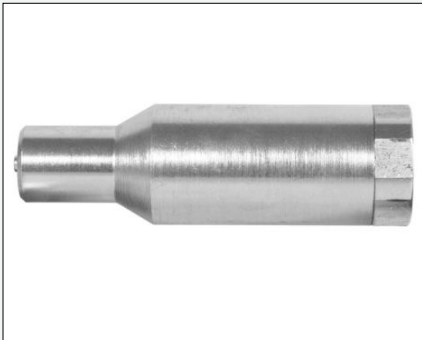

Product Code	Description	Threads
PL466	Automatic Non Drip Nozzle	1/4" BSPT Female

- Commonly used with metered oil control valves / hose end guns
- Used either with steel extensions or hoses at discharge end to cut off media supply, once filling is complete
- These have a steel construction, using NBR seals
- Automatic Non Drip Nozzle, designed with multiple check valves to achieve absolute non drip.
- The nozzle opens automatically under fluid pressure; and closes automatically with the release of pressure.
- The discharge end has a narrow section allowing the nozzle to dispense into small openings.
- Designed to minimize pressure loss
- Threaded 1/4" BSPT Female


### PL467

#### 200 MM FLEXIBLE HOSE EXTENSION



Product Code	Intended Use	Threads
PL467	200 mm Flexible Hose Extension	1/2" BSPT Male - 1/4" BSPT Male

- Flexible Oil Hose Extension for use with Oil Control Guns
- Max. Working Pressure 2,320 psi (160 bar)
- Overall Length 8" (200 mm)
- Hose Inner Dia. 1/2" (12.7 mm)
- Fittings: 1/2" BSPT (M) x 1/4" BSPT (M)

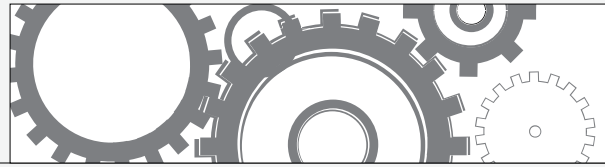

### PL470

#### ELECTRIC OIL PUMP



Product Code	Description	Flow Capacity
PL470	Electric Oil Pump	Up to 11 litres / min and 4.5 bar

- Heavy Duty Oil pump designed specifically to transfer bulk oils, hydraulic fluid, antifreeze or antifreeze mixes
  - Non corroding Aluminium Die cast pump body
  - A high horsepower to flow ratio assures adequate power to pump viscous fluids at low temperatures
  - Self priming, positive displacement design
  - Pump has an internal bypass valve to bypass flow, if the discharge pressure exceeds the bypass valve setting
  - Built-In 2" Bung Adaptor for mounting on drums/ tanks
  - Air Cooled Motor with Thermal Protection
  - Can be used to transfer Used oil with a screen fitted onto the Suction
  - Flow: Up to 6.5 GPM (25 lpm)
  - Motor: Heavy Duty 1/2 HP 220V AC, 50 Hz.
  - Amp: 6 Amp
  - RPM: 2800
  - Construction - pump housing: Aluminum Die Cast
  - Mechanism: Gear Pump
  - Gear Material: Sintered Powder Metal
  - Internal bypass valve: Yes
  - Suction Tube: Supplied to suit 50 to 205 litre drums
  - Delivery hose: 3/4" ID x 2.4 m long
  - Bung Adaptor: 2" Threaded BSPT
  - Inlet: 1" NPT
  - Outlet: 3/4" NPT
  - Dispensing Nozzle: Ball Valve
  - Power Cable: 760mm (30")
  - Air Cooled: Yes
  - Max. Viscosity of Oil: SAE 90
  - Max. Working Pressure: 65 psi (4.5 bar)
  - Thermal Protection: Yes
- RECOMMENDED USE**
- Oils, Synthetic Oils, Antifreeze, Used Oil, Hydraulic Fluids, Cutting Oils, Oil based Herbicides, Non Flammable Oil Based Solvents, Liquid Soap etc.

### PL480 & PL481

#### METAL OIL CANS

SUPPLIED WITH BOTH RIGID AND FLEXIBLE SPOUTS




Product Code	Intended Use	Oil Capacity
PL480	Lever Type with Brass Pump	300 ml
PL481	Lever Type with Brass Pump	500 ml

- Spout Length 125 mm (Rigid) or 150 mm (Flexible)
- All steel construction, with the body seamless drawn from tin coated sheet in premium powder coated finish
- Brass pump has 2 ball valves for large volume delivery per stroke.
- The suction valve at the bottom of pump is without spring, which prevents malfunctioning because of sticking valve due to resinous oil

# LUBE EQUIPMENT

## OIL ACCESSORIES

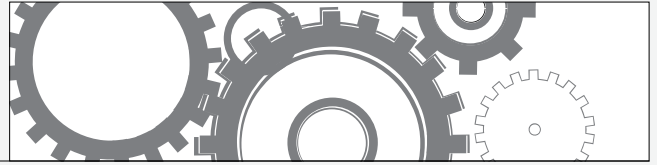

### PL482

#### PLASTIC BODY OIL CAN



Product Code	Description	Capacity
PL482	Plastic Body Oil Can	215 ml

- Unbreakable & rust resistant Plastic body Oil Cans
- Graduations marked on the bottle in both ml & oz.
- Oil discharge is through the 'squeeze action' of the Oil can bottle.
- Comes complete with telescopic steel tube with brass nut & non drip tip
- 150 mm spout length

### PL484 & PL485

#### PLASTIC FUNNELS

#### ANTI-SPLASH & SPILL PROOF



Product Code	Description	Capacity	Major Diameter	Spout Length
PL484	Plastic Funnel	1.7 litre	205 mm	170 mm
PL485	Plastic Funnel with Drum Adaptor	3 litre	240 mm	245 mm

- Heavy Duty Polypropylene construction
- Designed with special contours in the funnel body for easy handling
- Anti-splash and spill proof, with rim of the funnel curved in
- Complete with Wire Mesh Screen Dust Cover & flexible spout
- PL485 with drum Bung Attachment allows the funnel to be mounted direct onto drums with 2" threaded opening
- Manufactured in translucent white to give a clear view of media

### PL487, PL488 & PL489

#### PLASTIC MEASURES WITH SPOUTS




Product Code	Description	Capacity
PL487	Plastic Measure with Lid and Spout	1 litre
PL488	Plastic Measure with Lid and Spout	2 litre
PL489	Plastic Measure with Lid and Spout	5 litre

- Manufactured in translucent white to give a clear view of media
- Plastic Measures have a translucent High Density Polyethylene construction & are used for transferring metered quantity of fluids
- They are marked in both litres and quarts
- Come complete with a Polyethylene flexible spout with cap and polypropylene lid
- Note: Measures are not to be used as the basis of commercial transactions

# LUBE/FUEL EQUIPMENT

## OIL ACCESSORIES - WASTE OIL COLLECTION

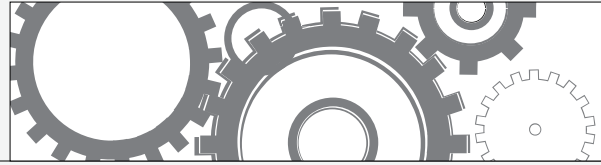

### PL490

#### WASTE OIL DRAIN



Product Code	Description	Bowl Capacity	Collection Capacity
PL490	Waste Oil Drain Collector	10 litres	55 litres

- Tank Capacity : 68 Litre
- Bowl inner Diameter : 355 mm
- Length of draining Hose : 2 metres
- Maximum Height : 1828 mm
- Minimum Height : 1143 mm
- Recommended Draining Pressure : 0.5 bar
- Oil Drain with wheel mounted tank for gravity draining of motor, engine, gearbox & differential oils, transmission & power steering fluids etc. from all types of motor vehicles placed on auto lift or a pit
- Centrally Mounted 10 litres capacity bowl is height adjustable & can be optimally positioned allowing oil draining as well as other maintenance operations
- Durable all-steel design and reinforced castors; the unit provides a safe & affordable option for draining, transferring & evacuating used oil
- Designed for excellent mobility, easy bowl positioning & simple to use pressurized evacuation
- Comes complete with a 355mm diameter telescopic bowl that can be adjusted from 1143 mm to 1828 mm
- 68 litre tank includes a preset air regulator that allows the use of standard compressed air up to 10 bar
- Tank includes a safety valve and a reinforced dispensing hose that doubles as a sight gauge to prevent overfilling
- Not for use with fuels and corrosive media

### PL500

#### INDUSTRIAL ROTARY FUEL TRANSFER PUMP




Product Code	Description	Flow Rate	Media
PL500	Industrial Rotary Fuel Transfer Pump	38 LPM	Most Fuels & Solvents

- FM Approved Pump for use with Class 1 & Class 11 flammable & combustible liquids
- Solid Cast Iron construction, with Sintered powdered 3 vane rotor c/w 3 Graphite vanes
- Flow 38 LPM, Self Priming
- Delivers media with a Head Lift of 6m (20 ft)
- Telescopic Suction Tube with strainer to use with 50 -205 L Drums c/w 2" bung
- Outlet : 2.4 m x 3/4" Antistatic hose, vacuum breaker, Non sparking aluminium Nozzle
- Nozzle holder
- Recommended use: Petroleum based fluids, Petrol, Diesel, Biodiesel, Ethanol blend (up to 15%), Kerosene, Naphtha, Alcohols, & other solvents compatible with the pump components
- Ideal for Barrels, Drums & tanks for quickly refueling diesel powered vehicles & Equipment
- Do Not use with water based media

# FUEL EQUIPMENT

## FUEL PUMPS

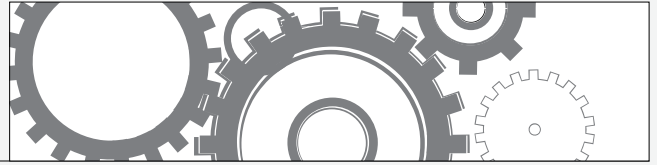

### PL503

#### HIGH FLOW 3:1 ROTARY BARREL FUEL PUMP




Product Code	Description	Flow Rate	Media
PL503	Industrial Rotary Fuel Transfer Pump	38 litres per minute	Most Fuels & Solvents

- Flow: Dispenses 205 Litres in 3 Minutes
- Die cast Aluminium construction with sintered gear driven die cast zinc rotor & vanes
- Geared Rotary barrel pump with 3 times discharge per rotation for every complete handle turn, the rotor turns 3 times
- Aluminium die cast handle with security locking latch
- Complete with 3 piece Suction tube 50 - 205 L drums c/w Bung
- Discharge hose 1.8M length
- Recommended use : Petrol, Diesel, Kerosene & Lubricating Oils up to SAE30
- **DO NOT** use with corrosive liquids, Solvents, Acids, Alkalis etc.
- **NOTE:-** Fuels Containing Ethanol & Biodiesel will cause more frequent replacement of rubber parts
- **NEVER** operate the pump near fire or source of spark. Some media may be explosive & dangerous to pump

### PL510 & PL511


#### 12V & 24V DC ELECTRIC DIESEL PUMPS

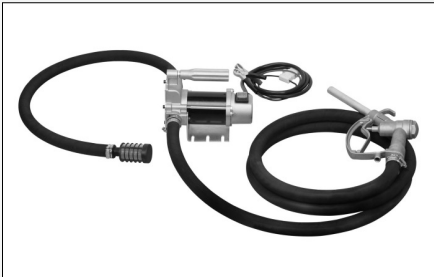

Product Code	Description	Flow Rate	Media
PL510	12VDC Electric Diesel Fuel Pump	46 litres per Minute	Diesel Fuel
PL511	24VDC Electric Diesel Fuel Pump	46 Litres per Minute	Diesel Fuel

- 12V DC or 24V DC Electric Diesel Fuel Pump
- Self Priming Vane Pump
- Portable Diesel transfer pump for every day use
- Light weight non corroding Aluminium Die cast construction
- Motor 1/4 HP
- Amp Draw from battery : 12 Amp & 8.7 Amp respectively
- Flow Rate 46 LPM
- Duty Cycle: 30min On / 30 Min OFF
- Max Working pressure 4.5 bar (65 PSI)
- Supplied with 4M hose to cut for both suction and Delivery
- Hardware included : 3 hose Barbs (3/4"), & 4 Hose clamps
- Battery cable 2m length with fuse and clamps
- Aluminium Nozzle for delivery of fluid
- Recommended use : Diesel & Kerosene
- **DO NOT** Use with fluids with a Flash Point below 38°C such as Petrol & Alcohol :- Sparking could result in explosion and fatal injury



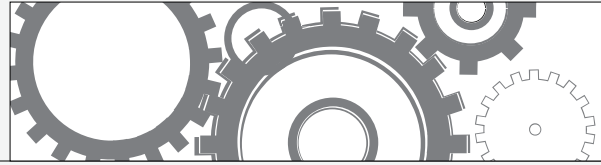

## PL515

### ELECTRIC FUEL AND OIL PUMP 230V AC



Product Code	Description	Flow Rate	Media
PL515	Electric Fuel & Oil Pump 230V AC	38 litres per minute	Most Fuels & Solvents

- Motor Double Insulated, safe to use with Water Emulsions
- Manufactured from chemically inert materials : POM
- Polypropylene, Stainless Steel, Nitrile Rubber, Viton & PTFE
- Working temperature range -10deg C to + 40deg C
- Flow rate : 40 LPM (measured at outlet)
- Motor 0.43 HP Centrifugal AC motor
- Internal by-pass valve : No
- Duty Cycle : Continuous Cycle
- Maximum Viscosity 114 cSt
- Built in anti-siphoning system ensures that the media does not flow out by siphon action in case of accidental damage to delivery hose or dispensing nozzle
- Built in bung adaptor to fit directly onto drum with 2" threaded opening
- Suction hose 3/4" x 1 mtr complete with stainless steel strainer
- Discharge hose 3/4" x 3 mtr long
- Dispensing nozzle 3/4" polypropylene c/w 3/4" hose barb
- Power cord : 2 mtr long
- Recommended Use : Diesel, Kerosene, Mineral & Synthetic Oils, Antifreeze, Water & Emulsions
- DO NOT Use with fluids with a flash point below 38deg C such as Petrol & Alcohol :- Sparking could result in an explosion causing fatal injury

## PL517

### ELECTRIC FUEL PUMP EXPLOSION PROOF 12V DC




Product Code	Description	Flow Rate	Media
PL517	Electric Fuel Pump Explosion Proof 12V DC	Up to 75 litres per minute	Most Fuels & Solvents

- Heavy Duty Industrial Grade High Flow Fuel Pump
- cUL, ATEX & IECEx listed motor
- Aluminium die cast construction, Geared pump design using sintered metal gears. Makes the pump tolerant to contaminants in fuels as well as tremendous suction and minimal noise
- Duty Cycle: 30 minutes ON / 30 minutes OFF
- Flow Rate: up to 75 LPM
- Explosion proof motor: 1/4 HP 12V DC
- Current Draw: 15 AMP
- Suction Pipe: steel
- Hose: 1" x 3.6 mtr antistatic hose
- Tank adaptor: 2" threaded spin collar for easy installation
- Inlet: 1" NPT
- Outlet: 1" NPT
- Wire mesh strainer fitted into body of pump for easy cleaning
- Dispensing nozzle: 1" manual with swivel
- Battery cable: 4.5 mtr
- Recommended use: Petrol, Diesel, E15 fuel, Kerosene, Bio-Diesel (B20)


# FUEL EQUIPMENT

## FUEL SPARE PARTS & FUEL GUNS

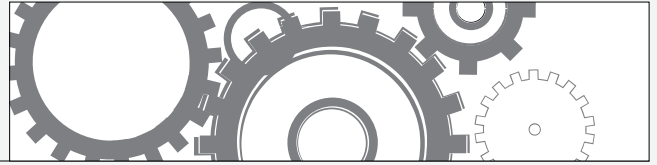

### PL520 & PL521

#### SPARES FOR FUEL PUMP PL500

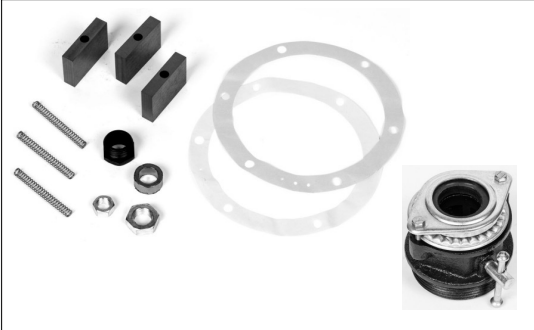

Product Code	Description	Includes	Also
PL520	Spares for Fuel Pump PL500	Gasket, Vanes, Springs	Complete Set
PL521	Spares for Fuel Pump PL500	Bung nut	c/w Flame Arrestor

**Kit Includes:**

- Pump head gasket
- Graphite Vanes : (3)
- Vane Springs : (3)
- Shaft nut , packing & packing nut

### PL530 & PL531

#### MANUAL FUEL CONTROL NOZZLES



Product Code	Description	Flow Rate	Media
PL530	Manual Fuel Control Nozzle Unleaded Fuel Use	57 litres per Minute	Unleaded Fuel
PL531	Manual Fuel Control Nozzle Diesel Fuel Use	75 Litres per Minute	Diesel Fuel

- All metal Aluminium Die cast construction
- Inlet: 1" BSP Aluminium hose swivel
- Outlet discharge spout :- 3/4" diameter x 160mm long (for Petrol)  
1" diameter x 160mm long (for Diesel)
- Maximum flow rate : 57 LPM (Petrol), 75 LPM (Diesel)
- Maximum pressure : 3.45 Bar (50 psi)
- For use with Electric Fuel pumps & Gravity feed
- Recommended use : All Petrols, Ethanol blends (up to 15%), Kerosene, Diesel, Biodiesel


### PL540 & PL541

#### AUTOMATIC HIGH FLOW FUEL CONTROL NOZZLES



Product Code	Description	Flow Rate	Media
PL540	Automatic Fuel Control Nozzle Diesel Fuel Use Only	75 litres per Minute	Diesel Fuel
PL541	Automatic Fuel Control Nozzle Petrol Fuel Use Only	57 Litres per Minute	Unleaded Fuel

- Aluminium Body, Trigger & Guard from Thermoplastic
- Sensor built in to the discharge spout outlet automatically shuts off supply once fuel level in the tank reaches that of the outlet spout
- For use with electric fuel pumps, Dual mode Manual & Automatic
- Inlet :- 1" BSP (F). Diesel (PL540)  
3/4" BSP (F) Petrol (PL541)
- Outlet spout straight :- 27mm OD (1.06") diameter (for Diesel)  
21mm OD (0.83") diameter (for Petrol)
- Maximum pressure :- 3.45 Bar (50 Psi)
- Recommended use : All Petrols, Ethanol blends (up to 15%), Kerosene, Diesel, Biodiesel

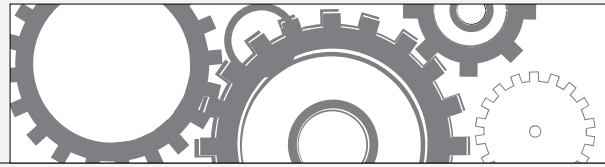

## PL550

### METERED FUEL CONTROL NOZZLE



Product Code	Description	Includes	Media
PL550	Metered Fuel Control Nozzle	Electronic Display	Diesel, Petrol, Biodiesel, Water

- Metered Fuel Control Nozzle
- Aluminium Die Cast Nozzle Body
- Polyamide body & sealed electronic card
- Inlet : 1" BSP (F) swivel
- Stainless Steel Adaptor included to convert Male to Female end
- Flow : 5 to 120 LPM
- Maximum Working Pressure : 10 Bar (150 psi)
- Working Temperature Range : -10°C to 50°C
- Sealed Electronics Display using Two x AAA 1.5V batteries (included)
- Water Resistance : IP55
- Maximum Resettable Batch Total : 99999 units
- Maximum Non Resettable Totalizer : 999999 units
- Least Count / Resolution : 0.001 units
- Accuracy : + / - 1%
- Repeatability : + / -0.30%
- Maximum Viscosity of media: 5.35 cst
- Recommended use: Diesel, Petrol, Bio-Diesel, Windshield Fluid, Water
- **DO NOT** use with Oils & Ethanol (incl. blends)
- NOT to be used for Media for RESALE

## PL560

### MECHANICAL NUTATING DISC FUEL METER




Product Code	Description	Includes	Media
PL560	Mechanical Nutating Disc Fuel Meter	Mechanical Display	Diesel, Petrol, Biodiesel, Oil

- Mechanical Nutating (wobble plate) Disc Fuel Meter
- Robust Aluminium Construction
- Nutating disc mechanism offers high tolerance to fuel contamination
- For use with Electric Fuel pumps or Gravity flow ( with a minimum gravity head of 1.2m)
- Port size: 1" BSP ( F )
- 3 Port design which allows the meter to be fitted in line or with the inlet outlet ports at right angle
- Register cap can be easily removed & rotated to every 90° orientation for display reading
- Flow Rate: 15 to 75 LPM
- Maximum Working Pressure: 3.5 Bar (50 Psi)
- Working Temperature Range: -10°C to +65°C
- Maximum Resettable Batch Total: 9999 Litres
- Maximum Non Resettable Totalizer: 999999 Litres
- Least Count Resolution: 0.10 Litres
- Accuracy: +/- 1%
- Repeatability: +/- 0.50%
- Recommended use: Diesel, All Petrols, Biodiesel, Low to medium Viscosity Oils
- **DO NOT** use with water based fluids

# FUEL EQUIPMENT

## FUEL METERS & FUEL FILTERS

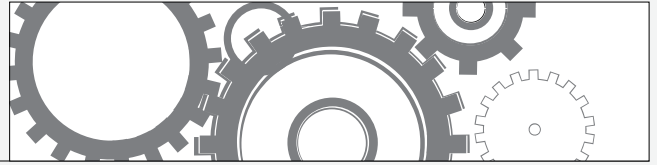

### PL561

#### DIGITAL TURBINE METER



Product Code	Description	Features	Media
PL561	Digital Turbine Meter	Electronic Display	Diesel, Petrol, Biodiesel, Water

- Polyamide body & sealed electronic card
- Electronic Display can be rotated in 4 different positions
- Electronic Display uses two x AAA 1.5V batteries ( included)
- Inlet / Outlet : 1" BSP (M) ( Stainless steel Female socket included)
- Maximum Working Pressure : 20 Bar ( 300 Psi)
- Flow : 5 to 120 LPM
- Temperature Range : -10°C to +50°C
- Maximum Resettable Batch Total : 99999 units
- Maximum Non Resettable Totalizer : 999999 units
- Accuracy : + / - 1%
- Repeatability : + / - 0.30%
- Water Resistance : IP55
- Recommended use : Diesel, Petrol, Bio-Diesel, Windshield fluid, Water
- DO NOT use with Oil

### PL570 & PL571

#### FUEL FILTER 1" BSP & REPLACEMENT ELEMENT



Product Code	Description	Flow Rate	Media
PL570	Fuel Filter 1" BSPP	10 Micron Paper	Diesel & Petrol Fuels
PL571	Fuel Filter - Replacement Element	10 Micron Paper	Diesel & Petrol Fuels

- Fuel Filter 1" BSP (F)
- High Flow Filter with 10 Micron Paper Element fitted
- Aluminium Die cast head
- Translucent Polypropylene Filter Bowl c/w Brass drain cock
- Removes Small particles of Rust, Dirt, Scale, Grit, Sand & lint  
at gravity flow 19 Litres / minute with only 600 mm head
- Maximum Working Pressure : 10 Bar ( 150 Psi)
- Recommended use : Diesel and Petrol
- DO NOT use with water based products, Ethanol blend fuels, Aviation Fuels, Race Fuels etc.
- Replacement Filter Element PL571


### PL572

#### FUEL FILTER WRENCH



Product Code	Description	Features	Material
PL572	Fuel Filter Wrench	Fuel Filter PL570	Reinforced Nylon

- Suits Fuel Filter PL570
- Weather resistant reinforced Nylon construction
- In addition fits other maker :  
Golenrod Models: 495 & 496  
Baldwin Model: B10AL  
National Spencer Model: NS-10  
John Deere Models: TY15192 & TY15677 etc.

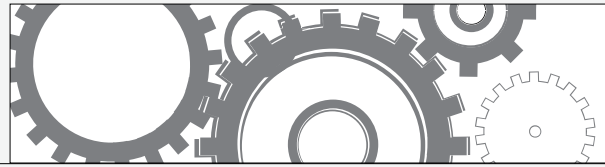

### PL600

#### ROTARY CHEMICAL PUMP



Product Code	Description	Flow Rate	Media
PL600	Rotary Chemical Pump	5 litres per 20 turns	Antifreeze, Fuel, Ad-Blue, Acid etc

- Pump Body made from Glass filled Polypropylene with Ryton Vanes
- All Seals are Viton & all pump hardware is Stainless Steel
- Threaded Polypropylene suction tube suits 50 to 205 Litre drums
- 2 x bung adaptors included
- Strainer fitted to the suction tube stop contaminants from entering the pump
- Delivers: 5 litres per 20 turns
- Recommended use: Dispensing water based media, Antifreeze, Urea, AdBlue, DEF, Benzine
- Also: Detergents, Glycerine, Acids, Chemicals, etc.
- In addition: to use with all Light weight petroleum based products
- DO NOT use with Acetone, Lacquer, Mineral oils, Solvents, Turpentine, etc.

### PL601

#### LEVER ACTION CHEMICAL PUMP



Product Code	Description	Flow Rate	Media
PL601	Lever Chemical Pump	500ml per stroke	Antifreeze, Fuel, Ad-Blue, Acid etc

- Lever Action Chemical Pump
- Wetted Components: Polyacetal, Polypropylene, PVC & Viton
- Anti siphon vent cap when loosend breaks the siphon action
- Built in 2" Bung Adaptor
- Flow: 500 ml per Stroke
- Suction tube suits 50 to 205 Litre drums
- Pump outlet fitted 2 M x 3/4" flexible corrugated discharge hose
- Design makes it extremely comfortable to pump thick oils without excessive fatigue
- Recommended use: Water based media, Detergents, Soaps, Antifreeze, windshield washer fluid
- Also: Hydraulic oils, Lubricants, Herbicides & Pesticides, Ad-Blu, Urea, DEF
- Pump should ONLY be used with NON flammable liquids

### PL610

#### MANUAL HEAVY DUTY SIPHON PUMP




Product Code	Description	Flow Rate	Media
PL610	Siphon Pump	21 litres per minute	Antifreeze, Fuel, Ad-Blue, Acid etc

- Up/Down lever action
- Easy to use Polyethylene Pump, siphon liquids to lower levels than the height of pump
- Easy to prime and start within 6 to 7 strokes
- Suits 205 litre drums, suction tube length 1212 mm
- Flow: 21 LPM
- Flexible corrugated discharge hose length 1200 mm
- Recommended use: Water based fluids, Detergents, Waxes, Soaps, Antifreeze, mild acid
- Also Detergents, Glycerine, Acids, Chemicals, etc.
- In addition: to use with all Light weight petroleum based products
- Do NOT use with Acetone, Lacquer, Mineral oils, Solvents, Turpentine, etc.
- Pump should only be used with light weight & NON Flammable media
- DO NOT use with any media not compatible with materials used in the pump construction
- WARNING: Pumps must never be used with HOT media at temperatures above +60°C

# DISPENSING EQUIPMENT

## DRUM ACCESSORIES

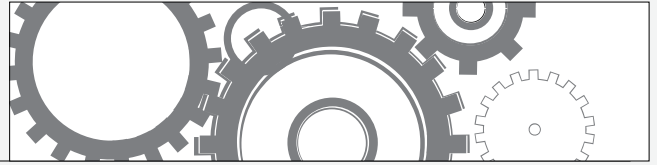

### PL670

#### DRUM WRENCH



Product Code	Description	Material	Bung Sizes
PL670	Drum Wrench	Cast Aluminium	2" and 3/4"

- An easy & convenient tool to open almost all types of drums
- Wrench is manufactured from cast aluminium (LM25) hardened & tempered to increase strength
- Ends of Wrench are designed to fit perfectly into most 2" & 3/4" drum plugs

### PL671

#### DRUM FAWCET / TAP




Product Code	Description	Material	Thread Size
PL671	Drum Faucet / Tap	High Density Polyethylene	3/4" BSP

- Body : High density Polyethylene. Knob: Low density Polyethylene
- Fits into 3/4" threaded opening on 205 litre drums
- Facilitates convenient dispensing of media under gravity flow with the drum laid horizontally

### PL672

#### ALUMINIUM DRIP PAN

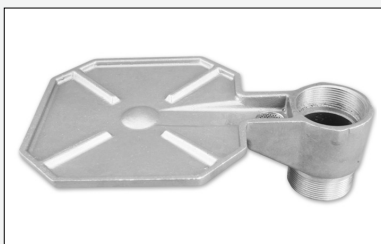

Product Code	Description	Material	Thread Size
PL672	Aluminium Drip Pan	Cast Aluminium	2" BSP

- Used as a drain for returning over flown media during dispensing
- Fits into any 2" threaded opening on a drum barrel or tank
- It additionally works as a base for holding a container during dispensing
- Keeps workplace clean & eliminates wastage, saving money each time the pump is used
- Designed with built in 2" bung adaptor & strainer for draining clean media back into the drum

### PL673


#### DRUM BUNG CONVERTER



Product Code	Description	Material	Thread Size
PL673	Drum Bung Converter	Polypropylene Co-Polymer	2" Fine x 2" Coarse

- Converts 2" Fine threads found on most pumps / drum bungs to 2" male coarse
- Making the pumps good for use on Plastic drums with 2" coarse female threads
- Construction: Polypropylene co-polymer designed with 4 protrusions for easy tightening
- Dimensions: 82 mm diameter x 34 mm high



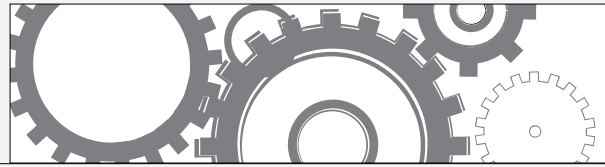

## PL710, PL721 & PL725

### MINIATURE 1/4" FILTER REGULATOR LUBRICATOR ( 2 PIECE)



Product Code	Description	Description	Sizes
PL710	Miniature 1/4" FLR	Die Cast Aluminium / Polycarbonate	1/4"
PL721	FRL Miniature Piping Adaptors	Used to connect PL710 FRL Units	1/4"
PL725	Spare Filter Element	Suit PL710 Filter	5 Micron

- Miniature 1/4" Filter Regulator Lubricator (2 piece)
- Die cast Aluminium Construction c/w Polycarbonate bowl with steel bowl guard
- Pressure Gauge & Mounting Bracket included
- Ports: 1/4" Bsp
- Flow: 500 Lpm (18 cfm)
- Maximum Pressure : 10 Bar ( 145 Psi )
- Pressure Adjustment Range of 0.5 - 10 Bar. ( 7 - 145 Psi)
- Filter Element: 40 Micron
- Press type manual drain with "night time drain"

## PL730 & PL731

### AIR BLOW GUNS WITH STAINLESS STEEL NOZZLES



Product Code	Description	Materials	Inlet Port
PL730	Air Blow Gun with 114 mm Nozzle	Body: Nylon Nozzle & Parts: S/Steel	1/4" BSP Fem.
PL731	Air Blow Gun with 330 mm Nozzle	Body: Nylon Nozzle & Parts: S/Steel	1/4" BSP Fem.

- Air Blow Gun with 114 mm & 330 mm nozzles
- Impact & weather resistant Nylon Body
- Stainless Steel Nozzle & parts
- Drop resistant construction
- Handle with Soft rubber grip for convenience & continuous use
- Variable speed trigger
- Ergonomic design of the gun helps eliminate the risk of Carpel Tunnel
- Connection : Brass threaded 1/4" BSP (F)
- Operating Pressure : 3.5 - 16 BAR (50 -235 Psi)
- Blowing Force at 6.8 bar = 0.35 Kgs
- Air Consumption: 15.18 CFM & 15.26 CFM @ 6.8 Bar respectiely
- Noise Level : 80 db @ 100 Psi

## PL735

### AIR BLOW GUN POLYACETAL BODY




Product Code	Description	Material	Thread Size
PL735	Air Blow Gun	Body: Polyacetal, Nozzle: Aluminium	1/4" BSP Fem.

- Polyacetal Body (POM)
- Non corroding Aluminium nozzle
- Variable Speed trigger ensures for full control of amount of air dispensed
- Connection : Brass threaded 1/4" BSP (F)
- Operating Pressure : 3.5 - 10 BAR ( 50 - 150 Psi )
- Blowing Force @ 6.8 Bar = 0.472 Kgs
- Air Consumption: 19.06 CFM @ 6.8 Bar

# AIR EQUIPMENT

## AIR LINE EQUIPMENT & GUNS

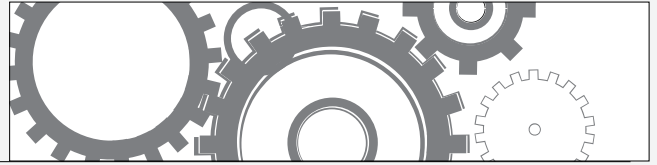

### PL739

#### AIR BLOW GUN KIT C/W 6 INTERCHANGEABLE ACCESSORIES



Product Code	Description	Material	Thread Size
PL739	Air Blow Gun Kit	Body: Nylon, Accessories: Aluminium & Rubber	1/4" BSP Fem.

##### Includes:

- Air Blow Gun PL730
- 100mm Protective Shield
- Soft Rubber Star Tip Nozzle for use on delicate materials
- 12.7 mm Rubber Tip for blowing out lines & cavities
- 25 mm Rubber Tip for blowing out lines & cavities
- 35 mm Rubber Tip for blowing out lines & cavities
- Venturi Nozzle turbo charges output. Great for blowing out dust, dying off and washing parts fast

### PL740

#### AIR BLOW GUN



Product Code	Description	Materials	Thread Size
PL740	Air Blow Gun	Body: Die Cast Aluminium, Nozzle: Rubber	1/4" BSP Fem.

- Metal Lever Air Blow Gun
- Manufactured from Die Cast Aluminium
- Feature revolutionary Venturi Mechanism that uses side ports to combine free ambient air with costly compressed air, creating a much higher volume of usable output
- Ergonomic design of the body & large dip coated lever reduces user fatigue & discomfort, even during extended use
- Maximum Pressure: 10 Bar (150 Psi)
- Threaded 1/4" ( F ) at inlet & 1/8" ( F ) at outlet
- 1/2" Rubber Tip
- Maximum DBA : 85


### PL749

#### BLOW GUNS & ACCESSORIES KIT




Product Code	Description	Materials	Thread Size
PL749	Air Blow Guns & Accessories Kit	Various	1/4" BSP Fem.

- Lever air blow gun kit with interchangeable tips
- Accessories supplied in tough plastic case and includes:-
  - \* 2 x PL740 Metal blow guns
  - \* 1/2" Rubber tip
  - \* Standard tip
  - \* Standard safety tip
  - \* High flow safety tip
  - \* Safety booster tip
  - \* Safety tamperproof tip
  - \* 1" Rubber tip
  - \* 1.3/8" Rubber tip
  - \* Soft rubber star tip
  - \* Adjustable brass tip
  - \* Nylon screen 1.1/4" wide tip
  - \* Nozzle with 4" protective shield tip
  - \* Nylon tapered tube 3" long tip
  - \* Mini aluminium tip
  - \* S/S needle 1.3/4" long x 1.8mm dia. tip
  - \* S/S needle 2.15/32" long x 2.4mm dia. Tip
  - \* Steel wire brush tip for industrial cleaning & drying
  - \* Extended reach Aluminium tube 3" long tip
  - \* Extended reach Aluminium tube 6" long tip

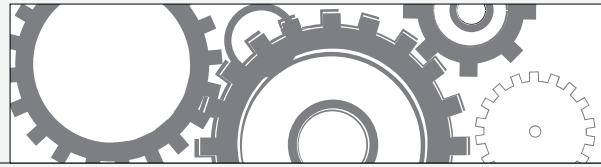


## ALNDP-15FPH AIR OPERATED DIAPHRAGM PUMP POLYPROPYLENE BODY

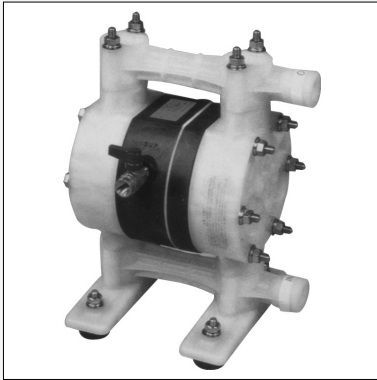


Product Code	Description	Pump Capacity
ALNDP-15FPH	1 1/2" Poly Diaphragm Pump	45 litres / minute

- Air operated double diaphragm pumps for use in a wide variety of industries
- A reliable, cost effective and versatile means of transferring fluids
- Suitable for the transfer of a wide variety of fluids including engine oil, gear oil, waste oil, some chemicals, caustic, antifreeze and waste water
- Polypropylene body with easily replaced Hytrel diaphragms
- All bolted construction enables easy servicing

Air Motor: Rytan®  
 Port Dimensions: 1/2" BSPT Female  
 Max. Liquid Temperature : 120°C  
 Air Inlet (includes ball valve): 1/4" NPT (F)  
 Air Exhaust: 3/8" NPT Female  
 Air Supply: 20 - 100 psi (1.4 - 7 Kg/cm²)  
 Discharge: 128 ml per cycle  
 Max. Cycle Rate: 400 Cycles per minute  
 Max. Size Solid: 1 mm  
 Max. Dry Lift (Suction): 2.4 m  
 Weight: 3.5 Kgs

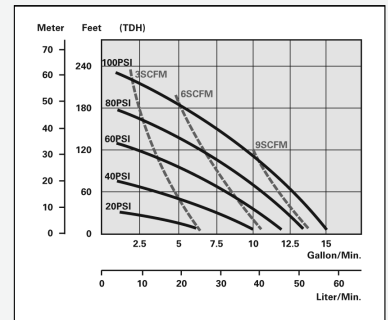



## ALNDP- xxBAH AIR OPERATED DIAPHRAGM PUMP ALUMINIUM BODY

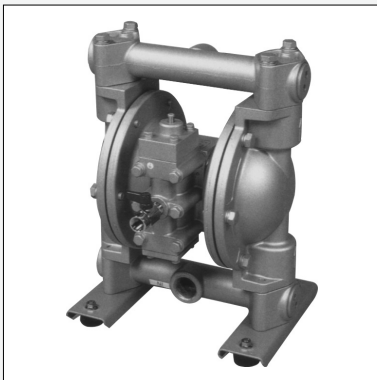

Product Code	Description	Pump Capacity
ALNDP-20BAH	Aluminium Diaphragm Pump 3/4" NPT	100 litres / min maximum
ALNDP-25BAH	Aluminium Diaphragm Pump 1" NPT	180 litres / min maximum


Air Motor: Aluminium  
 Port Dimensions: 3/4" NPT Female  
 Max. Liquid Temperature : 120°C  
 Air Inlet: 1/4" NPT Female  
 Air Exhaust: 3/4" NPT Female  
 Air Supply: 20 - 100 psi (1.4 - 7 Kg/cm²)  
 Discharge: 615 ml per cycle  
 Max. Cycle Rate: 195 Cycles per minute  
 Max. Size Solid: 2 mm  
 Max. Dry Lift (Suction): 5.48 m

Air Motor: Aluminium  
 Port Dimensions: 1" NPT Female  
 Max. Liquid Temperature : 120°C  
 Air Inlet: 3/8" NPT Female  
 Air Exhaust: 3/4" NPT Female  
 Air Supply: 20 - 100 psi (1.4 - 7 Kg/cm²)  
 Discharge: 833 ml per cycle  
 Max. Cycle Rate: 210 Cycles per minute  
 Max. Size Solid: 4.8 mm  
 Max. Dry Lift (Suction): 5.48 m

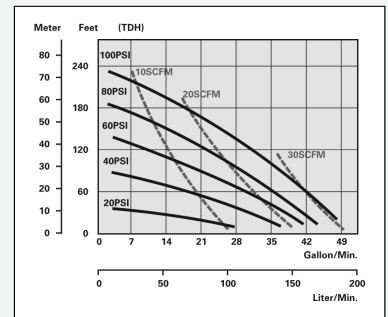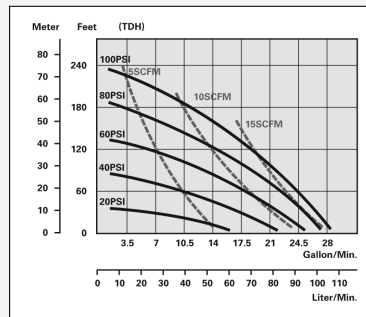

# LUBE EQUIPMENT

## ACCESSORIES

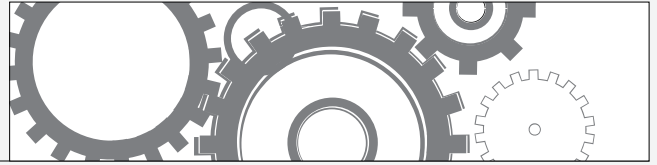



### AL20022

#### LED CORDLESS WORKSHOP LIGHT



Product Code	Description	Features
AL20022	LED Cordless Workshop Light	Inspection Light / Torch combined

- 30 LEDs on the side of the light for general ambient lighting
- 6 LEDs at the top for torch beam lighting
- The LED elements have a rated life of 100,000 hours
- Shatterproof construction
- Supplied inclusive of a 240 volt recharger and a 12 volt recharger
- Docking station
- Magnetic centre piece that enables hands free illumination of an area
- Maximum active life of the light as a secondary larger source after full recharge is approximately 10 hours
- A full charge for 6-8 hours must be completed prior to the initial use of the light to ensure correct operation

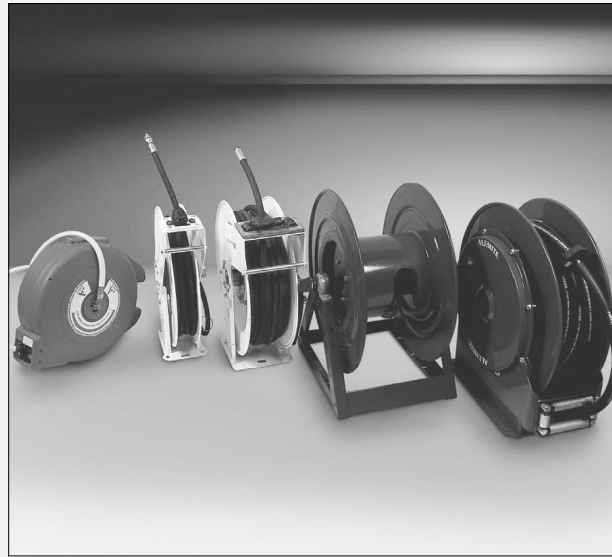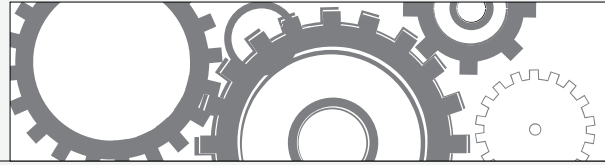

### Description :

- The Pirtek hose reel range makes light work of hose storage and retrieval. The range of hose reels facilitates the easy retrieval and storage of small or large, single or dual, short or long assemblies
- A versatile range suitable for a wide range of applications from water to fuel, lubricant, oxygen, breathable air and other fluids transfer
- The price to quality ratio is arguably the best available in Australia
- CAD designs and stringent quality control guarantee first class quality at all times

### Product Range:


- Spring rewind hose reels
- Air rewind hose reels
- Hydraulic rewind hose reels
- 12 volt and 24 volt rewind hose reels
- Manual rewind hose reels
- Suitable for hose assemblies from 6mm ID up to 32mm ID
- Suitable for hose assemblies from 6 metres long up to 225 metres long

### Applications:

- Primary Industry applications include timber processing, fisheries, agricultural, mining
- Secondary Industry applications include aviation, industrial, fibre packaging plants, printing plants, tyre plants, bakeries, automotive workshops, service station forecourts, contractors, steel mills, manufacturing, aluminium smelters, service trucks, golf courses etc.

# DISPENSING EQUIPMENT

## INDUSTRIAL HOSE REELS

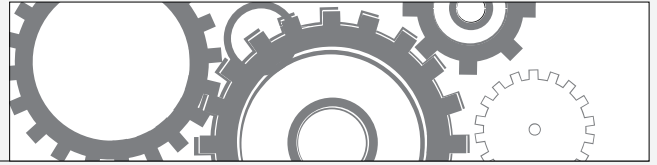

### AL501xxx

#### OPEN TYPE BARE HOSE REELS

#### AIR / OIL / GREASE



Product Code	Intended Use	BSP Threads	Recommended Hose
AL501198	Air / Low Pressure Water	1/2" In, 1/4" Out	13 m Textile 3/8" 15 bar
AL501298	Oil	1/2" In, 1/2" Out	10 m 1 wire 1/2" 75 bar
AL501398	Grease	1/2" In, 1/4" Out	10 m 2 wire 1/4" 350 bar

- Double arm automatic rewind hose reels for air, water, oil or grease
- All metal construction with forged brass shaft for corrosion free and leak proof operation even at high pressure
- Hose recoiling is driven by a special steel spring, which provides a long life and trouble free operation
- Positionable arms for optimum operation in any mounting position: wall, ceiling, floor or tank
- Maximum hose capacity: See Table above

### AL504xxx

#### OPEN TYPE BARE HOSE REELS

#### AIR / OIL / GREASE



Product Code	Intended Use	BSP Threads	Recommended Hose
AL504199	Air / Low Pressure Water	1/2" In, 1/2" Out	15 m Textile 1/2" 15 bar
AL504299	Oil	1/2" In, 1/2" Out	15 m 1 wire 1/2" 75 bar
AL504399	Grease	1/2" In, 1/4" Out	15 m 2 wire 1/4" 350 bar

- Dual pedestal
- Heavy duty double arm automatic rewind hose reels for air, water, oil or grease.
- All metal reinforced construction with forged brass shaft for corrosion free and leak proof operation even at high pressure.
- Hose recoiling is driven by a special steel spring, which provides a long life and trouble free operation.
- Positionable arms for an optimum operation in any mounting position: wall, ceiling, floor or tank.
- Maximum hose capacity: 15 m x 1/2" hose

### AL505xxx

#### 3/4" HOSE CAPACITY

#### AIR, WATER, OR FUEL HOSE REEL




Product Code	Intended Use	BSP Threads	Supplied Hose
AL505000	Air / Low Pressure Water / Oil	3/4" In, 3/4" Out	Bare Reel
AL505201	Air / Low Pressure Water / Fuel	3/4" In, 3/4" Out	15 m 1 wire 3/4" 75 bar
AL505299	Bare Hose Reel		Bare Reel

- Dual Pedestal
- Double arm, high volume, automatic rewind hose reels for air, water, or oil.
- All metal reinforced
- Full 3/4" port shaft and swivel so no flow restrictions.
- Hose recoiling is driven by a special steel spring, which provides a long life and trouble free operation.
- Positionable arms for an optimum operation in any mounting position: wall, ceiling, floor or tank.
- Maximum hose capacity: 20 m x 1/2" hose or 15 m x 3/4" hose.
- Models with hose include a 0.6 m long inlet hose.

This page is part of a complete catalogue containing technical and safety data.  
All data must be reviewed when selecting a product.  
Pirtek reserve the right to change technical specifications without notice.




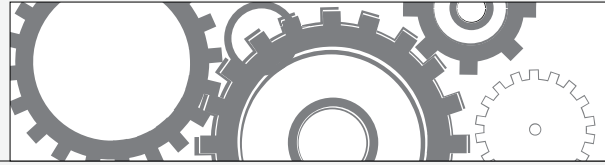

### AL7342

#### SELF RETRACTING REEL

#### 1" BARE HIGH CAPACITY

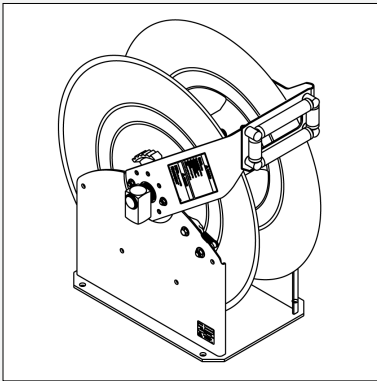

Product Code	Description	Max. Pressure	1" Hose Capacity
AL7342	Self Retracting Reel 1" Bare	69 bar	15 m 1 wire or fuel hose

- High-capacity hose reel designed to deliver fuel (such as diesel fuel, aircraft fuel, and gasoline) and lubricating oils while mounted to a lubrication truck or to a ceiling\* or wall)
- The reel mounts as a single unit or in banks of as many as required
- The hose guide arms can attach to the base assembly in five (5) different positions
- Connections: **Inlet** 1" NPTF Female **Outlet** 1" NPSM Female (or 3/4" NPTF Female via supplied bushing)
- The reel is spring-powered and self-retracting
- When the hose is extended, the reel can be latched on either of two ratchet sections per turn of the sheave
- A pull releases the latch from the ratchet and allows the hose to retract onto the reel
- If used to deliver gasoline or aircraft fuel, static electricity must be prevented:
  1. delivery and connecting hose must contain a grounding wire
  2. entire fuel delivery system must be properly grounded
- Failure to do so can result in personal injury through fire and/or explosion

\* Maximum height of the base plate above the floor 4.9 metres to comply with warranty

### ALOS615

#### OXY ACETYLENE HOSE

#### HOSE REEL




Product Code	Intended Use	Hose Capacity
ALOS615	OXY ACETYLENE HOSE REEL	15 metres

- Heavy duty steel construction with corrosion resistant powder coat finish
- Double 'O' Ring design prevents leakages
- 300 psi maximum working pressure
- Includes 15 metres of 1/4" ID delivery hose and 1.5 metres of lead-in hose
- Suited to use on light commercial vehicles

# DISPENSING EQUIPMENT

## COMPACT HOSE REELS

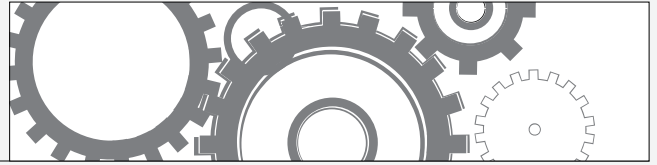

### ALAP650 / ALAP840

#### ROLLA AIR REELS



Product Code	Description	Supplied Hose
ALAP650	Air Reel	15m x 10mm hose with 3/8" BSP M&F
ALAP840	Air Reel	13m x 12mm hose with 1/2" BSP M&F

- Used extensively in locations including service station forecourts, automotive mechanical workshops, assembly plants, processing plants and food processing facilities
- Supplied inclusive of supply and lead-in hoses
- Two way roller guides extend hose life and ensure even hose retrieval and storage
- Detachable but sturdy steel mounting brackets facilitate quick and easy hose reel mounting
- Can be floor, wall or ceiling mounted
- Automatic and positive latching mechanism locks the hose assembly at the desired length

### ALAP809 / ALAS812

#### COMPACT ROLLA AIR REELS



Product Code	Description	Dimensions (mm)
ALAP809	Air Reel	9m of 5/16" ID hose
ALAS812	Air Reel	12m of 3/8" ID hose

- Ideal solution where space is limited
- Constant tension or automatic stop option
- Fully serviceable spring cassette
- Moulded steel electrostatically painted cover
- Reinforced polyurethane hose
- 4-way roller guide assembly
- Swivel mounting bracket
- Heavy duty inlet swivel rated to 20 bar
- Includes delivery hose and inlet hose
- 12 month warranty

### ALWP808 / ALWS812

#### COMPACT ROLLA WATER REELS



Product Code	Description	Dimensions (mm)
ALWP808	Water Reel	9m of 5/16" ID hose
ALWS812	Water Reel	12m of 3/8" ID hose

- Ideal solution where space is limited
- Constant tension or automatic stop option
- Fully serviceable spring cassette
- Moulded steel electrostatically painted cover
- Reinforced polyurethane hose
- 4-way roller guide assembly
- Swivel mounting bracket
- Heavy duty inlet swivel rated to 20 bar
- Includes delivery hose and inlet hose
- 12 month warranty

This page is part of a complete catalogue containing technical and safety data.  
All data must be reviewed when selecting a product.  
Pirtek reserve the right to change technical specifications without notice.

# LANOLIN PROTECT

## LANOLIN LUBRICANT & PROTECTANT



### Aerosols :

**Product code: PIR300C**

- Lanolin / hydrocarbon solvents blend
- Appearance: yellowish/tan coloured liquid with a slight characteristic wool odour.
- Boiling point melting point: 195°C
- Vapour pressure: 0.06 Kpa @ 38°C
- Specific gravity: 0.85 – 0.88
- Flash point: 78°C (solvent content)
- Flammability limits: 0.6 – 7.0 L.E.L. – U.E.L.
- Solubility in water: partial, turns to white emulsion.
- Autoignition temperature: >200°C
- Water resistant, water dispersant
- Anti corrosive spray
- Suits all ferrous and non ferrous materials such as steel, iron, stainless steel, copper, timber, leather, vinyl, canvas, plastics etc.
- Not for use on high speed bearings
- Safe to use on electrical equipment to 70000 Volts (**DO NOT** apply to live electrical equipment)

### Sprayable Liquids:

**Product Codes:**

**PIR1L, PIR5L, PIR20L, PIR750ML**

- Properties as for the aerosol form, but with higher lanolin content
- Use in harsh environments or where surfaces require a thicker film for more robust long term protection is required

ALL LANOLIN PRODUCTS  
ARE NON TOXIC AND  
ENVIRONMENTALLY  
FRIENDLY

**Refer Pirtek for  
MSDS sheets for these  
Products**


### Greases (anhydrous lanolin):

- Product codes: **PIRG165mL, PIRG1L, PIRG4L**
- Appearance: yellowish, tenacious, semisolid fatty substance with a slight characteristic odour
- Boiling Point Melting Point: 175°C (decomposition)
- Vapour pressure: not available
- Specific Gravity: 0.89 - 0.95
- Flash Point: 232 - 238°C (complies with Flash Point Determination in accordance with AS 2106.2:1999 using the Pensky-Martens apparatus conducted by Department of Mineral Resources, Mine Safety Laboratory)
- Flammability Limits: Not available
- Solubility in Water: Immiscible
- Ideal as a water resistant, anti-corrosive underwater and general purpose grease
- Nut and thread anti-sieze
- Protects metal, timber, rubber, vinyl, plastics
- Safe to use on electrical equipment to 70000 Volts (**DO NOT** apply to live electrical equipment)

PIRTEK LANOLIN PRODUCTS					
Product Code	Description	Aerosol	Liquid	Grease	Packaging
PIR300C	300GM AEROSOL CAN	•			Aerosol
PIR750ML	750 ML TRIGGER PACK LANOLIN LUBRICANT		•		750 ml Trigger Pack
PIR1L	1LTR TRIGGER PACK LANOLIN LUBRICANT		•		1 litre Trigger Pack
PIR5L	5 LITRE LIQUID JERRY		•		5 litre Jerry Can
PIR20L	20LTR DRUM C/W TAP + EMPTY 1LTR TRIG PACK		•		20 litre drum + trigger pack (empty)
PIR200L	200LTR DRUM C/W AIRATOR		•		200 litre drum with aerator
PIRG165ML	165ML GREASE TOTTLE BOTTLE			•	165 ml tottle bottle
PIRG1LP	1 LITRE GREASE PAIL			•	1 litre pail
PIRG4LP	4 LITRE GREASE PAIL			•	4 litre pail
PIRJT	PIRTEK 1LTR EMPTY JERRY				1 litre Jerry can (empty)
PIRMS4	MERCHANDISE DISPLAY STAND				Merchandiser stand only
PIRRA200L	200 LITRE LIQUID RELEASE AGENT DRUM		Release agent		200 litre drum
PIRRA1000L	1000 LITRE LIQID RELEASE AGENT DRUM		Release agent		1000 litre drum

# LANOLIN PROTECT

## POINTS TO NOTE

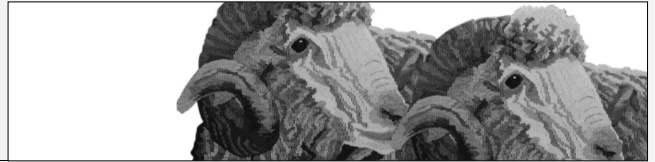

### SAFETY

- Liquid lanolin products contain specifically blended solvents that require a short time to evaporate. It is essential that the products are not applied to electrical equipment while it is live
- Lanolin products are derived from natural wax (wool grease) and are biodegradable, non toxic, and provide a safe, superior alternative to traditional petrochemical based dewatering and lubricating fluids
- Lanolin products provide high load bearing capabilities on bearings, but are not suited to use in high speed bearings
- Do not spray liquid lanolin products near fire, flame or sparks
- Lanolin products will not wash off. If surfaces coated with lanolin are to be painted, clean surfaces with white spirits, or steam clean above 65°C



### EMULSION COMPATIBILITY AND LIMITATIONS (UNDERGROUND MINING)

Pirtek Protect Lanolin lubricant and anti-seize greases offer long term protection, even in the harshest conditions. They protect, lubricate, penetrate and displace.

In the harsh environment that is underground mining using longwall equipment, machinery in the longwall is subject to mine waters and emulsions. It is important to lubricate moving parts and O-rings in the machinery to ensure that the equipment is kept running smoothly and to prolong the life of the machinery.

Pirtek Protect lanolin lubricant and anti-seize grease do just that!

Independent tests have been performed for both the lanolin lubricant and the anti-seize grease. Both products were each added with longwall emulsions at a set concentrate, based on the upper limit that might be reached in field application. Both products passed an O-ring swell test and thermal stability test.

- The O-ring swell test consisted of an O-ring immersed in the lanolin lubricant mixed with a longwall emulsion, and an O-ring immersed in the anti-seize grease mixed with a long wall emulsion. The O-rings were left in the mix for 56 days at 70°C. At the end of the test date, both O-rings were found to have no significant difference in swell.
- The thermal stability test was performed on both the Protect Lanolin lubricant and anti-seize grease, to test the oil separation when these products were added to the longwall emulsion.
- The stability tests were conducted for 168 hours at 70°C. At the end of the test period, there was no oil separation in either product.
- Excessive application of Lanolin grease to fittings and threads in a hydraulic system has been reported to cause precipitation of the grease in low-flow areas such as pilot systems. This can lead to a collection of microscopic debris that may cause problems with valve operation

***As a result of the this last point, the Protect lanolin product should not be allowed to come in contact with longwall emulsion hydraulic fluid. Its use should be restricted to lubrication of mechanical and electrical components external to the emulsion***

### FLASH POINT

Flash Point Approval has been granted to the range of Lanolin Products in accordance with Australian Standards AS2106.2:1999, using the Pensky-Martens apparatus.


Flash Point approval testing of the Lanolin Products was conducted and the approval has been granted by the Department of Mineral Resources Mine Safety Laboratory of New South Wales to Australian Standards AS2106.2:1999 in a controlled laboratory environment. The Department of Mineral Resources has also assessed the Material Safety Data Sheets (MSDS) Industrial Grade, approval has also been granted as all MSDS are compiled to the criteria of Worksafe Australia guidelines.

Flash Point testing has been undertaken to ensure that its products are safe to use in the mining industry for both Open Cut and Underground operations.



# LANOLIN PROTECT

## RECOMMENDED APPLICATIONS

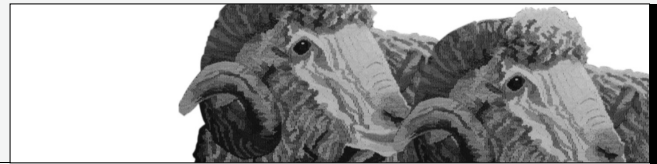

### OVERVIEW

#### Aerosols :

- Electrical connectors
- Lubricant for drilling, cutting, machining and pressing
- Welding anti spatter
- Component preservation
- Vehicle rust protection
- Lubrication of light chains
- Air tool lubrication
- Locks and hinges
- Rejuvenates plastics, vinyls, aluminium & powder coating
- Reduce oxidation during shipping

#### Sprayable Liquids:

- Harsh & corrosive environments
- Heavy chain & wire rope (non sling & non webbing)
- High speed and load bearing chains
- Battery terminals & connectors e.g. electrical fork trucks
- Assembly lube for rubber hoses & multi pin plugs
- Preservation & protect motors & bearings
- Outside storage protection

#### Greases:

- Food grade certified
- Non conductive to 70KV
- Rubber grease, non perishing, excellent belt grip
- Welding nozzle dip
- Drilling & cutting aid
- All purpose lubricant
- Anti-seize for nuts & bolts
- Metal to metal soft seal gasket
- Stop galling of st. steel & alumin.
- Stops electrolysis of dissimilar metals

#### Release Agents:

- Concrete form work
- Water resistant
- Self healing
- Stops swelling of timber end grain
- Less cleanup after stripping
- Extends formwork life
- No damage to the environment

### MINING

Pirtek Protect products are ideal in the mining environment because they provide what is effectively a hermetic seal or encapsulation of the targeted equipment. This protective film offers:

- environmental friendliness
- safety for workers
- non-toxicity
- superior dielectric performance
- long term pro-active protection
- Reduced acid etching
- great lubrication and anti-seize properties
- reduced hydrolysis
- reduced dismantling time and improved safety
- better opportunities for maintenance and therefore reduced downtime
- easy clean up

#### Use it on


- Roof Bolters - Drive chains, fittings, linkages and guides
- Rib Bolters - Drive gears, fittings, linkages
- Miner- Drive chains, chassis and protective covers, linkages, fittings, actuator pins, mounting bolts, electrical equipment and connections
- Shuttle Car- Universals and drive chains, linkages, fittings, cable level wind system, chassis, electrical equipment and connections, haulage chains and flight bars, mounting bolts, actuator pins and sprockets
- Mobile boot end- Drive chains, track adjustment bolts, guides, fittings, linkages, hinges and electrical equipment, chassis and protective covers
- Pumps and fan systems- linkages, protective covers, pump/fan housing, electrical equipment and fittings
- Conveyor Belts- Chains, shackles, turn buckles, electrical equipment, loop take up system, wire cables fittings, rollers, hanging brackets, pins, drive units, nuts/bolts, belt stands and rails

#### Long Wall Mining Operation

- Chock Supports- Linkages and electrical equipment
- Actuator pins, actuators, relay bars and guides
- Alternating Face Conveyor- Electrical equipment (motors etc), dog bone bolts, chain drives, sprockets, linkages, guides, threads (except hydraulic), main gate and tail gate drive units
- Stage Loader and Crusher Unit- Linkages, electrical equipment, guides, threads (except hydraulic) and bolts
- Pump Station- Pumps (except internal), electrical motors, filters, threads (except hydraulic) and bolts
- Conveyor Belts- Chains, shackles, turn buckles, loop take up system, electrical equipment, fittings (except hydraulic), wire cable, rollers, hanging brackets, pins, drive units, belt stands and rails

#### Washing or Screening Plant


- Conveyor belts- Electrical equipment, chains, shackles, wire cables, loop take up system, fittings, hanging brackets, pins, belt stands and rails
- Electrical Equipment- Motors, fittings, connections, lighting, camera surveillance systems, transformers, circuit breakers and distribution panels
- Screening & washing system- Electrical equipment, drive units, chains, wire rope, pins, fittings, slides, nuts & bolts

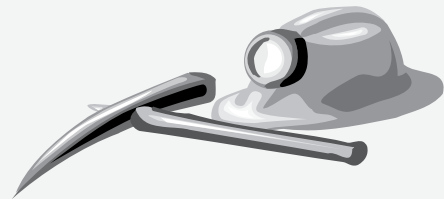



# LANOLIN PROTECT

## RECOMMENDED APPLICATIONS

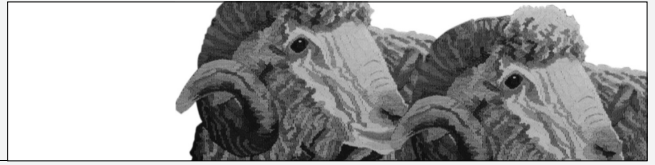

### METAL PRESERVATION

The metal preservation properties of Lanolin date back to ancient times. With modern refinement methods, Pirtek Protect offers you a product that can assist in so many ways. Machined, fabricated or ground components can be hermetically sealed against oxidization.

#### Benefits:

- Hermetic component preservation
- Remains pro-active
- Resists acid etching
- Great anti-seize properties
- Non-toxic lanolin film
- Easy clean up

#### Technical:

- Remove all oxidation or existing scale (e.g. wire brush)
- All surfaces must be dry and clean prior to coating
- Due to its pro-active properties, Pirtek Protect's protective coating will remain operative until removed
- A thin film of Pirtek Protect should be applied to all metal surfaces prior to storage. Lambswool pads may also be used to apply spray to components
- Pirtek Protect Products will preserve all joints and fittings for ease of servicing
- Clean off with steam cleaner or hot soapy water wash above 60°C



### WELDING

Pirtek Protect can save you many hours of lost production time by taking away those annoying and costly problems of Spatter!!! Also helps preservation of weld seams and plating.

#### Benefits:

- Reduction of embrittlement
- Base metal protection
- Component anti-spatter release agent
- Anti-spatter agent for fabrication workbenches
- Spatter release agent for welding head
- Reduces hydrolysis
- Easy to remove (Hot water wash above 60°C)

#### Technical:

Pirtek Protect is recommended for all welding situations


- For MIG shields, dip the heated end of the hand-piece in Protect to prevent spatter adhesion. Repeat as necessary
- All Pirtek Protect should be left for 30 seconds to allow the hydrocarbon solvent to evaporate prior to welding
- Pirtek Protect should only be applied while welds are still hot (but only if weld surface temperature is  $\leq 195^{\circ}\text{C}$ )
- For best results the ideal application temperature is above 65°C
- Pirtek Protect can penetrate up to 10 microns in mild steel at approximately 65°C.





# LANOLIN PROTECT

## RECOMMENDED APPLICATIONS

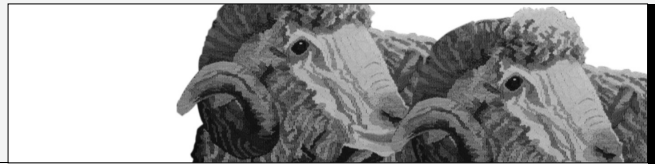

### MARINE COATING

#### Benefits

Hull protection:

Pirtek Protect is not and has no anti-foul qualities, but will reduce water drag factors

An ideal marine coating because of its proven ability to resist acid etching, i.e. barnacles. Subsequent re-application requires no special hull treatment such as sanding/grinding etc. Slipway or hardstand time is reduced due to the saving in preparation and spray application time

Virtually eliminates electrolysis – a little spray will stop this expensive killer

Drastically reduces bacterial attachments, thereby saving our waterways from the toxic cocktails caused by some traditional anti-fouls

Resistant to acid etching

Base metal penetration

Pro-active ability

Reduces hydrolysis

Also good for:

Outboard legs Sail Drives Bow Thrusters

Stern Drives Log Spigots Intake Pick-up Grates

Propellers

Buoys



#### Preparation

All equipment which has been in sea water, should first be washed down with liquid chlorine (3:1).

All boat hulls must be washed down with liquid chlorine (3:1) to kill any microscopic spore.

*Fibreglass hulls:* For new or previously untreated hulls a Gelcote sealer should be applied if one has not been applied previously, prior to applying Pirtek Protect. The surface must be CLEAN and DRY. Pirtek Protect should not affect the Gelcote sealer used on fibreglass hulls and there have been no reported instances where Pirtek Protect has reacted with a Gelcote sealer coating. If you are unsure about applying Pirtek Protect it is recommended that an inconspicuous section be coated to test for reactivity. If reaction occurs please do not apply Pirtek Protect.

*Aluminium hulls:* The surface must be CLEAN and DRY. If heavy oxidation exists, remove with aluminium cleaner, and then apply Pirtek Protect.

Previously anti-fouled hulls: Remove marine growth and loose anti-foul particles thoroughly. Surface must be CLEAN and DRY before application of our Pirtek Protect

*Propellers:* Clean propellor or fitting back to base metal and wash with a liquid pool chlorine at 3:1 ratio to kill any microscopic spore. (very important)

#### Application

Pirtek Protect Coating can be applied by:

(a) Sprays (including airless)

(b) Roller or brush

Generally 1 or 2 coats are sufficient.

Always allow evaporation time between coats and before launching. Remember Protect always remains tacky until submerged

*Propellers:* It is preferable to heat the metal to between 65°C to 100°C. Liberally apply Pirtek Protect Grease directly onto the hot components and rub in where practical.

#### Re-application

Clean off with steam cleaner or hot pressure wash. Surface may be cleaned by using Surface Prep or by hand scrubbing with hot water above 60°C.


When CLEAN and DRY, re-apply as per instructions

#### Maintenance

All moored hulls MUST be visually inspected, and the hull wiped down every 4– 6 weeks if required.

# LANOLIN PROTECT

## RECOMMENDED APPLICATIONS

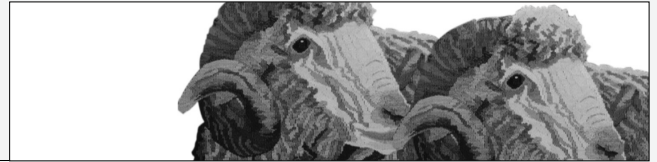

### AROUND THE HOME

Pirtek Protect products are ideal in the mining environment because they provide what is effectively a hermetic seal or encapsulation of the targeted equipment. This protective film offers:

- Stop squeaks from hinges on gates, doors and children's toys
- Having trouble again with that key in a padlock or door one, quick squirt protects and lubricates for long periods
- Lubricate sliding doors to restore smooth action
- Oil the bike chain and coat the bike preventing rust, Pirtek Protect works as well as a polish without the elbow grease
- Rejuvenate those dried out seals on pool pumps and filters
- Lubricate tracks for garage doors ensuring trouble free operation
- Protect your valuable tools from rust and corrosion
- Release those rusted up nuts and bolts in seconds

### Antennas / aerials


Due to the composition of dissimilar metals and high thermal cycling rates, antennas / aerials can benefit greatly from an application of Pirtek Protect, especially in severe corrosive environments.

#### Benefits

- Penetrates joints
- Penetrates base metals
- Reduces electrolysis
- No seizing of fittings
- The oxidization process is retarded

#### Technical


- Remove all flaking and oxidation with a wire brush.
- Apply Pirtek Protect to the antenna installation.
- Before application all components must be dry and should be carried out on a warm to hot day for best results.
- Pirtek Protect can be used as an anti-seize during installation on all bolts and nuts to protect and extend the life of your antenna.
- Non-conductive to 70KV but will not impede electrical contacts

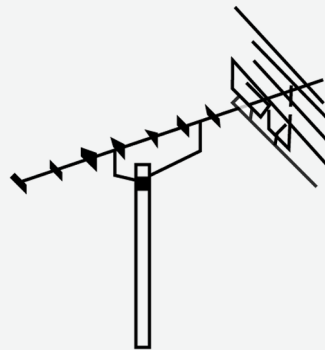

# PROTECT

## INDUSTRIAL ASSEMBLY PRODUCTS

REFER PIRTEK FOR MSDS SHEETS

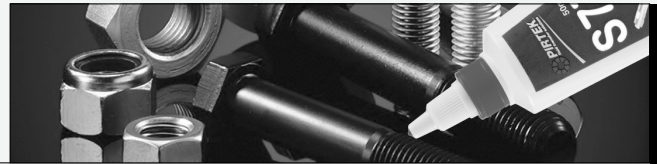

**Threadlockers :**

**Product Codes:**

**IAT43** in 10 ml and 50 ml bottles

**Medium Strength Blue IAT43 Nut Lock**

*Description*

Protect IAT43 is an anaerobic formulation designed to be used on parts in an "As Received" condition, such as those with protective films (oils) etc.

*Applications*

Designed for direct application onto as received parts where a light oily film exists or where surrounding parts contamination is a problem in maintenance

*Useful Hint*

Where possible, remove thick deposits of grease or dirt, however IAT43 will penetrate the film once it has been tightened

*Properties*

Use as a conventional medium strength Locker on cleaned parts with strengths up to 12N/mm<sup>2</sup> or as a convenient all purpose locker on oily parts with 8-10/mm<sup>2</sup> typical strength depending on oil type and film

*Procedure for Application*

Product is normally hand applied from the bottle. Full cure time 24 hours

*Compatible Accelerators / Primers*

Not recommended

*Technical Features*

Resin.....	Mod Methacrylate
Colour.....	Blue Thixotropic
Cure Speed.....	<15 mins @ 20°C
Viscosity.....	2500-5000
Thixotropic Gap Fill.....	..0.1mm
Flash Point.....	>85°C
Life.....	..12 months @ 20°C
Specific Gravity.....	.. 1.04
Max. Operating Temp. . . . .	..-53°C to + 150°C



**Threadlockers:**

**Product Codes:**

**IAT77** in 10 ml and 50 ml bottles

**High Strength Red IAT77 Stud Lock**

*Description*

IAT77 is an anaerobic locking compound in the form of a viscous paste and it is used to give high strength locking action

*Applications*

Mostly for fasteners of 25 mm (1" size) and above. Examples include

- Studs on Pressure Vessels
- Studs on Locomotive Units
- Hydraulic Studs on Presses
- Rock Crusher Studs
- Crawler Track Studs

*Useful Hint*

To speed cure or to help cure in cold conditions, use IAA471 Activator on parts

*Properties*

High Torque: 23.7 N-m (210 ins. lbs)  
Breakloose / Prevailing Torque: 34 N-m on rotation through 180 degrees

*Procedure for Application*

Product is normally hand applied from the bottle. Ensure parts are clean, dry and free from oil and grease

*Compatible Accelerators / Primers*

IAA471 Activator can be used, but up to 30% strength reduction may be incurred

*Technical Features*

Resin: .....	Dimethacrylate
Colour: .....	Red
Fixture Speed with Activator: <	10 mins/6 hours
Cure Speed without Activator: .	1 hour/24 hours
Viscosity: .....	6500 cps
Gap Fill: .....	.. 0.010"
Flash Point: .....	>85°C
Shelf Life: .....	12 months @ 20°C
Specific Gravity: .....	.. 1.10
Max. Operating Temp. ....	.. -50°C to +150°C



**Surface Preparation:**

**Product Code:**

**IAA471-200** in 200 ml Aerosol

**Structural Activator for Anaerobics**

*Description*

IAA471 Aerosol assists in speeding up the cure time of all anaerobic fluids and pastes and extends the cure through volume (especially suited to Pirtek Protect IAT43 and IAT77 threadlockers).

*Applications*

Use IAA471 when materials are inactive (plastics or passivated metals) or where temperature is under 15°C.

*Physical Properties*

Standard Grade Solvent:.....	..Heptane Based
Evaporation:.....	..60 seconds
Flammability:.....	..Flammable

*Technical Features*

Odour .....	Characteristic Odour
Viscosity .....	Non-Viscous
Flash Point: .....	17°C
Boiling Point .....	56-57°C
Flash Point .....	-17 °C
Solubility in Water .....	Slightly Soluble




Consult Pirtek for MSDS Sheets for all Industrial Assembly Products

# PROTECT

## INDUSTRIAL ASSEMBLY PRODUCTS

REFER PIRTEK FOR MSDS SHEETS

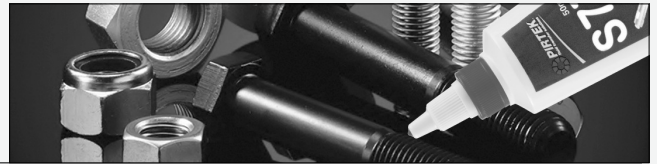

IAS69-50



### Sealing & Gasketing :

#### Product Codes:

IAS69 in 50 ml bottle

#### High Strength Hydraulic Sealant - Brown

##### Description

IAS69 Hydraulic Seal is an anaerobic liquid which cures to form a tough, high pressure seal on all types of threaded couplings used on low, medium and high pressure lines

##### Applications

IAS69 is used for all types of hydraulic connections, sealing against typical pressure line ratings. Use Hydraulic Seal to fit valves, threaded couplings, adaptors, quick disconnect parts, compression fittings and vibration proofing joints. Designed for direct application onto as received parts where a light oily film exists or where surrounding parts contamination is a problem in maintenance

##### Useful Hint

For fast cure, clean parts and apply local heat to joints with a heat gun or soft flame

##### Properties

IAS69 is tolerant of a light oil film. Seals up to 400bar, 20mm fittings, and makes vibration proof joints

##### Procedure for Application

Product is normally hand applied from the bottle. Ensure parts are clean, dry and free from oil and grease. Full cure in 12 hours

##### Compatible Accelerators / Primers

IA471 Activator can be used, but up to 30% strength reduction may be incurred

##### Cured Performance

ISO10964 Break/Prevailing Strgth.. 15/≥8 N.m  
DIN54454 Break/Prevail.. Strgth.24/15-35 N.m

##### Technical Features

Resin.....	Dimethacrylate
Colour.....	Brown
Cure Speed With Activator.....	<5 minutes
Cure Speed Without Activator.....	10-20 minutes
Brookfield RVDVII + @ 20C.	
Spindle 5 @ 20rpm.....	400 to 800cps
Gap Fill.....	0.05mm to 0.25mm
Flash Point.....	>100°C
Shelf Life.....	12 months @ 20°C
Specific Gravity.....	1.06
Max Operating Temp. ....	-55°C to + 150°C

IAS72-50



### Sealing & Gasketing:

#### Product Codes:

IAS72 in 50 ml tube

#### Low Pressure Pipe Seal - White

##### Description

IAS72 White Pipeseal is an instant low pressure sealant for fine and coarse threads up to 2" in diameter. S72 does not fully cure until some 60 hours after application, allowing re-alignment of elbows and joints

##### Applications

Replaces tapes and dopes, stops gas and fluid leaks on most metals and assists in lubricating during assembly. IAS72 will not shred or tear which would contaminate your system. Use IAS72 to seal against oils, gases, chemicals, water, steam etc.

##### Useful Hint

Wipe threads with clean shop cloth. Apply a continuous bead to 3rd or 4th thread depending on the thread length

##### Properties

Instantaneous low pressure seal. No locking action up to 48 hours. Easy break loose allowing re-alignment

##### Procedure for Application

Ensure parts are clean, dry and free from oil and grease. Degreasing directly assists results

##### Compatible Accelerators / Primers

Not recommended

##### Technical Features

Resin.....	Dimethacrylate
Colour.....	White Paste
Cure Speed w/ Activator...Not Recommended	
Cure Speed W/out Activator.....	Up to 60 hours
Viscosity .....	20,000cps
Gap Fill.....	0.4mm
Flash Point.....	>85°C
Shelf Life.....	12 months @ 20°C
Specific Gravity.....	1.25
Max Operating Temp. ....	-55°C to + 150°C

IAS55-50



### Sealing & Gasketing:

#### Product Code:

IAS55 in 50 ml tube

#### Designer Gasket - Purple Paste

##### Description

Flange Seal Type IAS55 is a purple, smooth, thick paste. Easily applied, it cures once confined between the parts to form in place a tough, flexible gasket. IAS55 gives an instant low pressure seal

##### Applications

IAS55 is used for fuel and water pumps, split crank cases on engines, gearbox covers, engine thermostats, air compressor end caps, engine timing cam covers onto blocks, pump couplings, fuel tanks on small implements, chainsaws, lawn mowers etc. Use IAS55 for dressing gaskets, spacers etc.

##### Useful Hints

Where gap size is large or where the surface is uneven, apply IA471 Activator to help the product cure through volume. IAS55 can be roller coated, screen printed, traced or pad applied.

##### Properties

Instant low pressure sealant. Forms any size or shape. Will not shrink or relax. IAS55 is flexible and will not crack

##### Procedure for Application

Product is normally hand applied from the tube. Ensure parts are clean, dry and free from oil and grease

##### Compatible Accelerators / Primers

IA471 Activator can be used, but up to 20% strength reduction may be incurred

##### Cured Performance

Full Cure Time.....	12 hours
Tensile Strength.....	8 N/mm <sup>2</sup>
Static Shear Strength.....	12.5 N/mm <sup>2</sup>

##### Technical Features


Resin.....	Modified Urethane Acrylate
Colour.....	Purple Paste
Cure Speed With Activator.....	<2 hours
Cure Speed Without Activator...Up to	12 hours
Viscosity .....	>1,000,000cps
Gap Fill.....	0.5mm
Flash Point.....	>100°C
Shelf Life.....	12 months @ 20°C
Specific Gravity.....	1.10
Max Operating Temp. ....	-55°C to + 150°C



# PROTECT

## INDUSTRIAL ASSEMBLY PRODUCTS

REFER PIRTEK FOR MSDS SHEETS

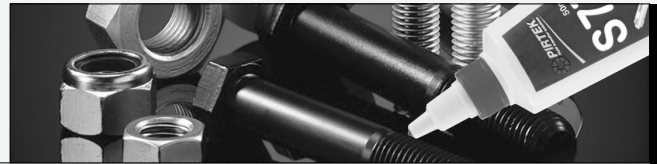

### Sealing & Gasketing :

**Product Codes:**

**IAS77** in 50 ml tube

**High Strength Gas Pipe Seal - Yellow**

*Description*

Protect IAS77 is a high viscosity thixotropic gel paste which cures rapidly, sealing instantly to 10 bar through its anaerobic cure system in contact with metals in the absence of air (oxygen). When fully cured it resists pressure up to 350 bar. IAS77 is not suitable for oxygen systems. AGA Certificate 6900

*Applications*

Typical applications are in sealing of all types of threaded connections against water, oil, gases and most common materials conveyed by pipes

*Useful Hint*

When cure speed is extended due to low temperatures or inactive surfaces, activator can be used. Best results are found if IAS77 is applied to 2nd or 3rd threadform. Excess can be wiped away, any migration into lines will not solidify and can be flushed away during commissioning

*Properties*

Fast cure to fixture usually <15 mins. @ 20°C  
 Temperature range: -50°C to +150°C  
 Typical Strength: 5 N/mm<sup>2</sup>  
 Sizes 6mm up to 75mm (coarse)  
 Increase of gap size or fit extends the cure time

*Procedure for Application*

Product is normally hand applied from the bottle. Ensure parts are clean, dry and free from oil and grease. Full cure 6-12 hours

*Compatible Accelerators / Primers*

IA471 Activator can be used, but up to 30% strength reduction may be incurred

*Technical Features*

Resin: .....Dimethacrylate  
 Colour: .....Yellow  
 Cure Speed with Activator: .....<10 minutes  
 Cure Speed w/o Activator:.....<15 mins @ 20°C  
 Viscosity: .....>50,000 cps  
 Gap Fill: .....0.05mm to 0.4mm  
 Flash Point: .....>100° C  
 Shelf Life: .....12 months @ 20°C  
 Specific Gravity: .....1.09  
 Max. Operating Temp. ....+150°C



### Sealing & Gasketing :

**Product Codes:**

**IAS57** in 50 ml tube

**PTFE Instant Pipe Sealant**

*Description*

Protect IAS57 Instant Pipe Sealant is an easy to use anaerobic pipe sealant which sets fast to give an instant low pressure seal of 100 psi and a high pressure seal of 10000 psi when fully cured. This high strength product provides 100% sealing capability and does not shrink after curing, unlike more traditional solvent based pipe dopes.

*Applications*

IAS57 Instant Pipe Sealant with Teflon lubricates parts during assembly. The cure system allows for realignment of parts up to 24 hours from application. This product can be used on most hydraulic, pneumatic, oil, water and gas connections.

*Useful Hint*

Ensure parts are clean, dry and free from oil and grease.

*Cured Performance*

Full Cure Time:.....24 hours @ 20°C  
 Shear Strength.....10000 psi

*Procedure for Application*

Product is normally hand applied from the tube or brushed directly onto threaded parts. Primers such as IA471 (Standard Anaerobic Activator) can be used. However up to 20% strength loss can occur when using accelerators.

*Technical Features*

Resin ..... Dimethacrylate  
 Colour .....White  
 Fixture Speed w/Activator.....<10mins  
 Fixture Speed w/out Activator.....4 hour  
 Visco.....300,000 – 400,000cps  
 Gap Fill.....0.254mm  
 Shelf Life.....12 months @ 20°C  
 Max. Operating Temp. ....-54°C to + 200°C



### Retaining:

**Product Code:**

**IAR41** in 10 ml and 50 ml bottles

**Medium Strength Bearing Fit - Yellow**

*Description*

Bearing Fit IAR41 is a single part anaerobic securing compound, designed for fitting cylindrical metal assemblies and cures when confined between the parts

*Applications*

Protect IAR41 will secure all types and sizes of bearings, shafts and cylindrical parts which will require disassembly in the future. IAR41 is of medium strength and is colour coded yellow for job identification

*Useful Hint*

To speed cure or to help cure in cold conditions, use IA471 Activator on parts

*Properties*

Fast cure usually <15 mins. @ 20°C  
 Medium strength removable compound  
 Typical Strength: 12 N/mm<sup>2</sup>

*Procedure for Application*

Product is normally hand applied from the bottle. Ensure parts are clean, dry and free from oil and grease. Full cure 12 hours

*Physical Properties*

Standard Grade Solvent:.....Heptane Based  
 Resin.....Mod. Dimethacrylate  
 Colour.....Yellow  
 Cure Speed With Activator.....<5 minutes  
 Cure Speed Without Activator....10-15minutes  
 Viscosity.....1500 cps  
 Gap Fill.....0.2 mm  
 Flash Point.....>100°C  
 Shelf Life.....12 months @ 20 C  
 Specific Gravity.....1.06  
 Operating Temp.....-55°C to + 150°C




Consult Pirtek for MSDS Sheets for all Industrial Assembly Products

# PROTECT

## INDUSTRIAL ASSEMBLY PRODUCTS

REFER PIRTEK FOR MSDS SHEETS

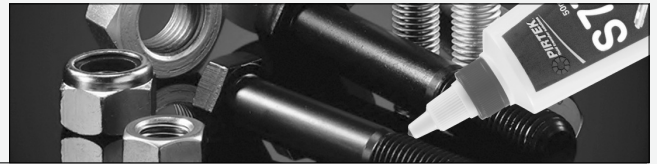

**Retaining :**

**Product Codes:**

**IAR62** in 10 ml and 50 ml bottles  
**High Strength / High Temperature**

*Description*

IAR62 Retainer is rated up to 232°C as the upper operational temperature and is designed for bonding/securing in a high strength manner, all types of cylindrically fitted parts

*Applications*

Protect IAR62 is used on all types of applications where temperatures exceed the design features of conventional Retainers, above 150°C. It develops high strength at elevated temperatures.

*Useful Hint*

Speed cure IAR62 by applying a localised heat with a heat gun or by placing parts in an oven @ 100°C for 30 minutes. Pre-heating of parts also accelerates the fixture and ultimate final cure

*Properties*

Good gap fill ability. Elevated upper temperature limits. Resistant to 3000 psi shear

*Procedure for Application*

Product is normally hand applied from the bottle. Ensure parts are clean, dry and free from oil and grease. Full cure in 24 hours

*Compatible Accelerators / Primers*

IA471 Activator can be used, but up to 30% strength reduction may be incurred

*Cured Performance*

Typical Breakaway Strength:.....20 N/mm<sup>2</sup>

*Technical Features*

Resin.....	Mod. Dimethacrylate
Colour.....	Green
Cure Speed With Activator.....	10 minutes
Cure Speed Without Activator.....	30 minutes
Viscosity.....	7000 cps
Gap Fill.....	0.4 mm max.
Flash Point.....	>85°C
Shelf Life.....	12 months @ 20 C
Specific Gravity.....	1.08
Max. Operating Temp.....	-55°C to + 232°C



**Instant Bonding:**

**Product Codes:**

**IACA41** in 25 ml bottle  
**Quick Bonding**

*Description*

IACA41 is a hybrid quality Cyanoacrylate which is surface insensitive and bonds to a wide variety of materials including wood, paper, cardboard, leather, fabrics etc. Bond times vary according to the substrates but are generally faster than normal superglues

*Applications*

Typical applications include wood trim on furniture, balsa wood bonding for hobbyists, leather accessories on shoes, fabric bows on shoes and lampshade bonding.

Other features include versatile bonding or most elastomers, metals and plastics

*Useful Hint*

On elastomer bonding and some plastics, residues or release agents on surfaces should be removed by wiping with a solvent cleaner

*Properties*

Steel to Steel:.....	20 N/mm <sup>2</sup>
Rubber to Rubber .....	10 N/mm <sup>2</sup>
Plastic to Plastic .....	15 N/mm <sup>2</sup>

*Procedure for Application*

Ensure parts are clean, dry and free from oil and grease. Apply sparingly to one side and hold parts until handling strength is achieved (typically less than 15 seconds)

*Compatible Accelerators / Primers*

Primers such as A021 or Double Strength A113 as accelerators for fillet cure for priming absorbent surfaces (available from Pirtek to order)

*Technical Features*

Resin.....	Modified Ethyl
Colour.....	Clear
Cure Speed W/ Activator.....	Not Recommended
Cure Speed W/o Activator.....	<10 seconds
Viscosity.....	120cps
Gap Fill.....	0.1mm
Flash Point.....	>85°C
Shelf Life.....	12 months @ 20°C
Specific Gravity.....	1.05
Operating Temp. ....	-60°C to + 80°C



**Instant Bonding:**

**Product Code:**

**IACA60** in 25 ml bottle  
**High Strength Instant Adhesive**

*Description*

IACA60, when compared to other low viscosity Cyanoacrylates, outperforms most products for cure speed, final cured strength and simply the wide range of difficult plastics and elastomers it can bond

*Applications*

For example, Nitrile, Neoprene and natural rubbers can be bonded in 1-2 seconds and all the bonds are stronger than the material itself. Plastics such as ABS, soft PVC, Polyacetal, EPT and EVA all bond in 1-2 seconds and the bonds are stronger than the material being bonded. Metals such as steel, aluminium, copper and brass all bond in under 5 seconds and the bond strengths are superior to other manufacturers low viscosity products

*Useful Hints*

Slower cures of up to 12 seconds are found on Polymethyl Methacrylate (PMMA), Bakelite, Polycarbonate and Viton rubber. Polyolefins can be treated with special preparations. Consult Pirtek re Product Data Sheet 25 when dealing with these difficult plastics

*Properties*

Speed: Plastics (most) .....	<2 seconds
Rubbers (most) .....	<4 seconds
Metals .....	<5 seconds
Strength:.....	Plastics to substrate failure
.....	Rubbers to substrate failure
.....	Metals >30 N/mm <sup>2</sup> (Shear 15 N/mm <sup>2</sup> )

*Procedure for Application*

For best results, degrease/abrade and make sure the surfaces are clean and free from dirt, dust and contamination such as mould release agents. Apply a thin film or drop to one surface only and bring parts together holding firmly for a few seconds until the parts achieve a handling strength. Remember one drop bonds about 25mm<sup>2</sup> and a 25 ml bottle has about 200 drops. 24 hours for full cure

*Compatible Accelerators / Primers*


Primers such as A021 or Double Strength A113 as accelerators for fillet cure for priming absorbent surfaces (available from Pirtek to order)

*Technical Features*

Resin.....	Modified Ethyl CA
Colour.....	Clear
Cure Speed With Activator.....	Instant
Cure Speed Without Activator.....	1-5 seconds
Viscosity.....	20cps
Gap Fill.....	0.1 mm
Flash Point.....	>85°C
Shelf Life.....	12 months @ 20°C
Specific Gravity.....	1.06
Max. Operating Temperature.....	-60°C to + 90°C



# PROTECT INDUSTRIAL ASSEMBLY PRODUCTS REFER PIRTEK FOR MSDS SHEETS

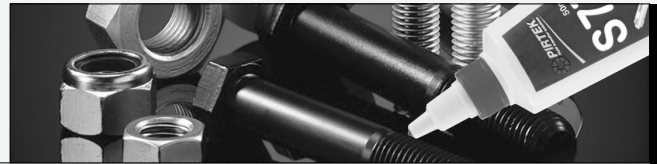

IATDS198



**TDS198 EPOXY :**

Product Codes:

**IATDS198** in 180 mm x 20 mm Rod  
**Aluminium Stick - Epoxy Putty**

*Description*

A hand kneadable, speciality epoxy putty that mixes in one minute to provide fast, permanent repairs to most aluminium surfaces. When applying it to surfaces it is necessary to work the material forcefully into the surface and apply pressure until adhesion begins to take effect. Lower temperature causes longer cure time. The handy rod form has the curing agent encapsulated in the contrasting colour base material. It's putty-like consistency eliminates drips and runs, providing "no mess" application with no tools required to use. The mixed epoxy turns from a silvery colour to "Alloy" upon curing and will not yellow upon exposure to UV light. After final cure, Aluminium Stick may be drilled, sawed, tapped, filed, sanded and painted. It allows patching in areas where welding is impossible

*Applications*

After proper mixing, Aluminium Stick moulds like clay and may be used to permanently patch dents, scratches, cuts, gouges and holes in items such as housings and all types of repairs to mouldings and injection type shapes. Aluminium Stick is ideal for making emergency repairs to reforming, rebuilding and patching anything made out of aluminium such as HVAC parts, refrigeration units, air conditioning units, machine parts, alu-roofing, flagpoles, shelving, platforms, walkways, campers, vehicles, canopies, gutters, truck bodies, wheels, manifolds, stripped threads, marine hardware and casings

*Useful Hint*

Mixing: Twist or cut off required amount. To mix, knead with fingers to a uniform colour. If mixing is difficult, warm the steel stick to room temperature or slightly above. Apply to the surface to be repaired (within 2 minutes of mixing). The mixed epoxy does not exhibit high bond strength at this point, but appears to be merely lying on the surface.

Force into any cracks or holes to be filled and strike off excess material, preferably with a tool wetted with clean water. Work the material forcefully into the surface and apply pressure until adhesion begins to take effect.

For a smooth appearance, hand rub with water or a damp cloth prior to hardening. Remove excess material before hardening begins. After 15-20 minutes the epoxy will harden like metal and start to form a tenacious bond. After just 45 minutes IATDS198 is completely cured and can be drilled, sawed, carved, sanded, stained or painted

*Properties*

Opening Time:	5 minutes
Max. Temp Resistance:	120°C (150°C intermittent)
Initial Cure:	1 hour max.
Full Cure Time:	24 hours
Lap Shear Strength (Steel):	4.8 N/mm <sup>2</sup>
Shore D Hardness:	70/80
Compressive Strength:	84 N/mm <sup>2</sup> - 12,000 psi

*Procedure for Application*

Surface should be cleaned free of grease or dirt. Scuffing or sanding the surface prior to cleaning helps to ensure a good bond

*Technical Features*

Resin:	Epoxy Light Silver
Epoxy Resistance:	Hydrocarbons, ketones, esters, halo-carbons, alcohols, aqueous salt solutions and dilute acids and bases
Electrical Resistance:	30,000 mega Ohms
Dielectric Strength (Steel):	300 Volts/mil
Shrinkage:	<1%
Non-Volatile Content:	100%
Shelf Life:	>6 months @ 25°C

IATDS252



**TDS252 EPOXY:**

Product Codes:

**IATDS252** in 180 mm x 20 mm Rod  
**Steel Stick - Epoxy Putty**

*Description*

Steel Stick is a hand kneadable, non rusting, steel reinforced epoxy putty that mixes in one minute to provide fast, permanent repairs to items made of ferrous and aluminium metals. It comes in a handy rod form with the curing agent encapsulated in the contrasting colour base material. It's putty-like consistency eliminates drips and runs, providing "no mess" application with no tools required to use. Steel Stick is black in colour after use.

*Applications*

After proper mixing, Steel Stick moulds like clay and may be used in many industrial and home Maintenance applications, including repair of iron pipes, tanks, tools and equipment, repair blow holes, holding and placement of fixtures and signs, repairs to moulds, patterns and castings, making prototypes, threading, repair cracked castings, repairs to down spouts and gutters, light fixture installations, repairs to duct-work, anchor bolts, as well as countless other uses. The unused portion of Steel Stick will remain stable for years if protected from direct contact with the air, in cool conditions.

*Useful Hint*

Mixing: Twist or cut off required amount. To mix, knead with fingers to a uniform colour. If mixing is difficult, warm Steel Stick to room temperature or slightly above. Apply to the surface to be repaired (within 2 minutes of mixing). The mixed epoxy does not exhibit high bond strength at this point, but appears to be merely lying on the surface. Force into any cracks or holes to be filled and strike off excess material, preferably with a tool wetted with clean water. When applying to a damp, wet or slowly leaking area, work the material forcefully into the surface and apply pressure until adhesion begins to take effect. For a smooth appearance of the cured compound, hand rub with water or a damp cloth prior to hardening. Remove excess material before hardening begins. After 15-20 minutes the epoxy will harden like metal and start to form a tenacious bond. After just 45 minutes Steel Stick is completely cured and can be drilled, sawed, carved, sanded stained or painted.

*Properties*

Opening Time:	3.5 minutes
Max. Temperature Resistance:	120°C (150°C intermittent)
Initial Cure:	1 hour max.
Full Cure Time:	24 hours
Lap Shear Strength (Steel):	6.2 N/mm(2)
Shore D Hardness:	80
Compressive Strength:	84 N/mm(2) - 12,000 psi

*Procedure for Application*

Surface should be cleaned free of grease or dirt. Scuffing or sanding the surface prior to cleaning helps to ensure a good bond

*Technical Features*

Resin:	Epoxy
Chemical Resistance:	Hydrocarbons, ketones, esters, halo-carbons, aqueous salt solutions and dilute acids and bases
Electrical Resistance:	30,000 mega Ohms
Dielectric Strength (Steel):	300 Volts/mil
Shrinkage:	<1%
Non-Volatile Content:	100%
Shelf Life:	>6 months @ 25°C

IAREX5-25



**REX5 EPOXY:**

Product Code:

**IAREX5** in 25 ml double syringe  
**Fast Set General Purpose - Clear**

*Description*

IAREX5 is a two part component low odour epoxy with an open time of 60 minutes and sets hard but workable. It is a viscous material that is usually supplied in cartridge format and is designed to mix in a ratio of 1-1 by volume using static type mixing nozzles

*Applications*

IAREX5 epoxy is an effective adhesive for wood, metals, ceramic, fibreglass and most plastics. Typical applications include repairs and renovation of metal castings, ceramic tiles, vessels or ornaments, wooden, metal or plastic furniture, stone or concrete paving slabs or copings. It is particularly useful for securing household fittings to brick, plaster, wooden or plastic surfaces, laminating melamine surface sheet to wood or block board, modelling and test rig manufacture.

IAREX5 epoxy is not suitable for polythene, polypropylene or plasticised PVC. If in doubt, carry out a small trial with the adhesive before using on a large application.

Once the pack has been opened, the cap (which is contained within the plungers) should be removed and placed over the open ends of the syringe. The cap will fit in only one way to avoid contamination

*Typical Performance*

ADV60 allows an open time of approximately 60 minutes prior to setting and gives a handling time of 10 hours with full cure @ 20°C in about 72 hours

*Useful Hint*

Cut nozzles and extrude equal amounts and mix for about 30 seconds. Static mix nozzles should be firstly equalised and a little extruded out and discarded as waste to ensure correct balanced mixing. Apply to a prepared surface and press or clamp surfaces together supporting the joint if required.

Note the handling time as the product chosen is a slow set variety

*Temperature vs Strength*

Ultimate strength is achieved above 60°C. It drops significantly from 50° to a minimum @ 40° of less than 25% of full strength or less

*Properties*

<b>CURED PROPERTIES</b>	
Static mix nozzle	opentime 4 mins.
Volume 100g mix	3.5mins
Cure to Light Fixture	15 minutes
Cure to moderate handling @ 50°C strength	2 hours
Full 24 hour cure - shear	<18N/mm2
Full 24 hour cure - peel	<6N/mm2
Speed Cured @ 60°C to 50% approx strength	20-25 minutes
Chemical Resistance	Moderate / Good
Impact Resistance	Poor
Heat Resistance	20°C to +60°C
Water Resistance	Moderate

*Procedure for Application*

Surface should be cleaned free of grease or dirt. Scuffing or sanding the surface prior to cleaning helps to ensure a good bond

*Technical Features*

Resin:	Epoxy
Chemical Resistance:	Hydrocarbons, ketones, esters, halo-carbons, aqueous salt solutions and dilute acids and bases
Electrical Resistance:	30,000 mega Ohms
Dielectric Strength (Steel):	300 Volts/mil
Shrinkage:	<1%
Non-Volatile Content:	100%
Shelf Life:	>6 months @ 25°C



This page is part of a complete catalogue containing technical and safety data.  
All data must be reviewed when selecting a product.  
Pirtek reserve the right to change technical specifications without notice.

# PROTECT

## INDUSTRIAL ASSEMBLY PRODUCTS

REFER PIRTEK FOR MSDS SHEETS



### Silicone Sealant:

#### Product Codes:

**IASIL** in 300 ml Tube

**High Temperature Silicon - Black**

#### Description

IASIL RTV Silicone is a one part, easily applied, paste-like sealant that cures to form a high purity elastomer on exposure to atmospheric moisture. No primers or accelerators are needed. When cured, it resists most chemicals, high temperatures and exhibits excellent mechanical properties

#### Applications

All applications where a non-sag sealant of exceptional longevity is required to bond glass, metals, ceramics, wood stone etc. IASIL eliminates leakage, reduces noise, absorbs vibration, seals and bonds parts into a secure unit.

#### Useful Hint

Where surfaces require only a single sided bond, it is possible to treat the side not requiring adhesion with a release agent or simply apply petroleum jelly or oil. When cured torque up the parts to form a compressive seal

#### Properties

Cure rate is 3mm in 24 hours but is humidity and temperature dependant. The rate of cure can be accelerated by increasing the temperature (70°C max.) and increasing the humidity levels

#### Procedure for Application

Product is normally hand applied from the cartridge. Ensure parts are clean, dry and free from oil and grease. Full cure in 72 hours

#### Compatible Accelerators / Primers

Products are available to order for difficult surfaces. Please consult Pirtek

#### Cured Performance

Full Cure Time: .....72 hours maximum  
 Tensile Strength: .....2 N/mm<sup>2</sup> - 300psi  
 Hardness : .....34 Shore A  
 Elongation : .....450%

#### Technical Features

Resin: .....Polydimethyl Siloxane  
 Colour: .....Black  
 Cure Speed: .....Skin 15 mins  
 Cure Speed: .....3mm in 24 hours  
 Shelf Life: .....9-12 months unopened  
 Specific Gravity: .....1.25 @ 250°C  
 Operating Temperature: .....-70°C to +225°C  
 (-70°C to + 300°C Intermittent)



### Aluminium Anti-Sieze Lubricants:

#### Product Codes:

**IAAA** in 200 ml Tube or 500ml Can

**Aluminium Anti-Sieze - High Temp. 871°C**

#### Description

IAAA Aluminium-Graphite Anti-Sieze paste consists of uniform, fine flaked particles in a special blend of lubricants and oils. It is ideal for use on a wide range of industrial products to prevent seizing, galling and excessive wear.

#### Applications

Can be used on nuts, bolts screws, pipe threads, O-rings, shafts and hubs. Typical applications include conveyor systems, gear boxes, chains, cams, u-joints, sprockets and tracking.

Protects up to 980°C

Prevents seizing and galling of metals

Protects against harsh and corrosive environments

*Note that IAAA is not a high speed load carrying lubricant and is not recommended for ball or roller bearings.*

#### On Part Performance

Temperature:.....-53°C up to 871°C  
 Water Resistance:.....Excellent  
 Corrosivity:.....Very Low  
 Protection Level:.....Salt Water, Chemicals

#### Procedure for Application

Ensure parts are clean and dry, then simply apply by brush to provide instant protection.

#### Technical Features

Base:.....Highly Modified Synthetic Oil  
 Additives:.....Copper, Graphite, Aluminium,  
 Anti Corrosion Properties  
 Shelf Life:.....1½ Years  
 Consistency:.....Paste  
 Viscosity:.....120K - 175K  
 Lubricity .k Factor:.....0.18  
 Coefficient of Friction:.....0.07 from 20°C - 760°C  
 Specific Gravity:.....app 1.3  
 Flash Point:.....>150°C  
 Texture:.....Smooth Paste

Meets or exceeds the requirements of MIL-A-907E specification and conforms to GM -6108M



### Nickel Anti-Sieze Lubricants:

#### Product Code:

**IANA** in 500 ml Tub

**Nickel Anti-Sieze - High Temp. 1426°C**

#### Description

IANA Nickel-Graphite Anti-Sieze paste is a high temperature resistant anti seize paste that lubricates during assembly, providing protection against seizing, galling and excessive wear even in the most adverse conditions.

#### Applications

Lube for threaded parts  
 Lube for valve seatings  
 Rust preventative on any assembly  
 Fork Lift chain guard and lube  
 Boiler hinges and door latches  
 Prevents seizure on aero jets, turbines etc.

Protects threads, gears, pulleys, chains, rollers, cables, hinges, pivots, sprockets, oven doors, exhaust manifold parts, flues, and assemblies etc.

#### Useful Hints

Nickel Anti-Seize prevents corrosion in adverse conditions such as high and low temperatures and extremes of surrounding conditions such as rain, water jets, salt spray, salt water immersion etc.

Because nickel is such a hard metal that can keep surfaces apart, IANA is particularly well suited to applications involving dissimilar metals

#### Torque / Tension Relationships

Pre-load is provided with lubricity reducing friction, controlling on torque variations, and assisting in achieving the desired tensile pre-load

#### Properties

Resists galvanic action  
 Eliminates galling on press fits  
 Eliminates pitting and electrolysis  
 Eliminates seizure and protects from rust

#### Used in:

Automotive – on and off road.  
 Marine and on board equipment  
 All types of Industrial equipment

#### Procedure for Application

Ensure parts are clean and dry, then simply apply by brush to provide instant protection.

#### Technical Features

Resin:.....Nickel particles in speciality extended base  
 Colour: .....Metallic Silver  
 Cure Speed: .....30 mins @ 25°C  
 Re-coating: .....After 30 mins  
 Viscosity (thixotropic):.....120K - 175K  
 Lubricity .k Factor:.....0.13  
 Coefficient of Friction:.....0.17 at 71°C  
 Solvent Resistance:.....Insoluble in water  
 Shelf Life: .....1½ Years  
 Max. Operating Temperature: .....-53°C to + 1426°C  
 Meets or exceeds the requirements of MIL-A-907E specification



Consult Pirtek for MSDS  
 Sheets for all Industrial  
 Assembly Products

# TECHNICAL DATA

## CHEMICAL RESISTANCE TABLE - ANAEROBICS

AGENT	INDUSTRIAL ANAEROBIC				
	IAS55, IAS57	IAS69, IAS72, IAS77	IAR41, IAR62	IAT43	IAT77
Abrasive Coolant	G	G	G	G	G
Acetaldehyde	G	G	G	G	G
Acetate Solvents	G	G	G	G	G
Acetimide	G	G	G	G	G
Acetic Acid	G	G	G	G	G
Acetic Acid <10%	G	G	G	G	G
Acetic Acid >10%	-	-	-	G	-
Acetic Acid - Glacial	G	G	G	G	G
Acetic Anhydride	G	G	G	G	G
Acetone	G	G	G	G	G
Acetylene (Liq. Phase)	G	G	G	G	G
Acid Clay	G	G	G	G	G
Acrylic Acid	G	G	G	G	G
Acrylonitrile	G	G	G	G	G
Activated Alumina	G	G	G	G	G
Activated Carbon	G	G	G	G	G
Activated Silica	G	G	G	G	G
Alcohol - Allyl	G	G	G	G	G
Alcohol - Amyl	G	G	G	G	G
Alcohol - Benzyl	G	G	G	G	G
Alcohol - Butyl	G	G	G	G	G
Alcohol - Ethyl	G	G	G	G	G
Alcohol - Furfuryl	G	G	G	G	G
Alcohol - Hexyl	G	G	G	G	G
Alcohol - Isopropyl	G	G	G	G	G
Alcohol - Methyl	G	G	G	G	G
Alcohol - Propyl	G	G	G	G	G
Alum - Ammonium	G	G	G	G	G
Alum - Chrome	G	G	G	G	G
Alum - Potassium	G	G	G	G	G
Alum - Sodium	G	G	G	G	G
Alumina	G	G	G	G	G
Aluminium Acetate	G	G	G	G	G
Aluminium Bicarbonate	G	G	G	G	G
Aluminium Bifluoride	G	G	G	G	G
Aluminium Chloride	G	G	G	G	G
Aluminium Sulfate	G	G	G	G	G
Ammonia Anhydrous	U	U	U	U	U
Ammonia Solutions	U	U	U	U	U
Ammonium Bisulfite	G	G	G	G	G
Ammonium Borate	G	G	G	G	G
Ammonium Bromide	G	G	G	G	G
Ammonium Carbonate	G	G	G	G	G
Ammonium Chloride	G	G	G	G	G
Ammonium Chromate	G	G	G	G	G
Ammonium Fluoride	G	G	G	G	G
Ammonium Fluorosilicate	G	G	G	G	G
Ammonium Formate	G	G	G	G	G
Ammonium Hydroxide	G	G	G	G	G
Ammonium Hyposulfite	G	G	G	G	G
Ammonium Iodide	G	G	G	G	G
Ammonium Molybdate	G	G	G	G	G
Ammonium Nitrate	G	G	G	G	G
Ammonium Oxalate	G	G	G	G	G
Ammonium Persulfate	G	G	G	G	G
Ammonium Phosphate	G	G	G	G	G
Ammonium Picrate	G	G	G	G	G
Ammonium Sulfate	G	G	G	G	G
Amnim. Sulfate Scrubber	G	G	G	G	G
Ammonium Sulfide	G	G	G	G	G

AGENT	INDUSTRIAL ANAEROBIC				
	IAS55, IAS57	IAS69, IAS72, IAS77	IAR41, IAR62	IAT43	IAT77
Ammonium Thiocyanate	G	G	G	G	G
Amyl Acetate	G	G	G	G	G
Amyl Amine	G	G	G	G	G
Amyl Chloride	G	G	G	G	G
Aniline	G	G	G	G	G
Aniline Dyes	G	G	G	G	G
Anodizing Bath	G	G	G	G	G
Antichlor Solution	G	G	G	G	G
Antimony Acid Salts	G	G	G	G	G
Antimony Oxide	G	G	G	G	G
Antioxidant Gasoline	G	G	G	G	G
Aqua Regia	U	U	U	U	U
Argon	G	G	G	G	G
Armeen	G	G	G	G	G
Arochlor	G	G	G	G	G
Aromatic Gasoline	G	G	G	G	G
Aromatic Solvents	G	G	G	G	G
Arsenic Acid	G	G	G	G	G
Asbestos Slurry	G	G	G	G	G
Ash Slurry	G	G	G	G	G
Asphalt Emulsions	G	G	G	G	G
Asphalt Molten	G	G	G	G	G
Bagasse Fibers	G	G	G	G	G
Barium Acetate	G	G	G	G	G
Barium Carbonate	G	G	G	G	G
Barium Chloride	G	G	G	G	G
Barium Hydroxide <10%	G	G	G	G	G
Barium Hydroxide >10%	-	-	-	G	-
Barium Sulfate	G	G	G	G	G
Battery Acid <10%	G	G	G	G	G
Battery Acid >10%	-	-	-	G	-
Battery Diffuser Juice	G	G	G	G	G
Bauxite (See Alumina)	G	G	G	G	G
Bentonite	G	G	G	G	G
Benzaldehyde	G	G	G	G	G
Benzene	G	G	G	G	G
Benzene Hexachloride	G	G	G	G	G
Benzene-Hydrochloric Acid	G	G	G	G	G
Benzoic Acid	G	G	G	G	G
Benzotriazole	G	G	G	G	G
Beryllium Sulfate	G	G	G	G	G
Bicarbonate Liquor	G	G	G	G	G
Bilge Lines	G	G	G	G	G
Bleach Liquor	G	G	G	G	G
Bleached Pulps	G	G	G	G	G
Borax (S) Liquors	G	G	G	G	G
Boric Acid	G	G	G	G	G
Brake Fluids	G	G	G	G	G
Brine Chlorinated	G	G	G	G	G
Brine (Cold)	G	G	G	G	G
Bromine Solution	-	-	-	-	G
Butadiene	G	G	G	G	G
Butyl Acetate	G	G	G	G	G
Butyl Alcohol	G	G	G	G	G
Butyl Amine	G	G	G	G	G
Butyl Cellosolve (S)	G	G	G	G	G
Butyl Chloride	G	G	G	G	G
Butyl Ether (Dry)	G	G	G	G	G
Butyl Lactate	G	G	G	G	G
Butyral Resin	G	G	G	G	G

AGENT	INDUSTRIAL ANAEROBIC				
	IAS55, IAS57	IAS69, IAS72, IAS77	IAR41, IAR62	IAT43	IAT77
Butyraldehyde	G	G	G	G	G
Butyric Acid <10%	G	G	G	G	G
Butyric Acid >10%	-	-	-	G	-
Cadmium Chloride	G	G	G	G	G
Cadmium Plating Bath	G	G	G	G	G
Cadmium Sulfate	G	G	G	G	G
Calcium Acetate	G	G	G	G	G
Calcium Carbonate	G	G	G	G	G
Calcium Chlorate	G	G	G	G	G
Calcium Chloride	G	G	G	G	G
Calcium Chloride Brine	G	G	G	G	G
Calcium Citrate	G	G	G	G	G
Calcium Ferrocyanide	G	G	G	G	G
Calcium Formate	G	G	G	G	G
Calcium Hydroxide	G	G	G	G	G
Calcium Lactate	G	G	G	G	G
Calcium Nitrate	G	G	G	G	G
Calcium Phosphate	G	G	G	G	G
Calcium Silicate	G	G	G	G	G
Calcium Sulfamate	G	G	G	G	G
Calcium Sulfate	G	G	G	G	G
Calcium Sulfite	G	G	G	G	G
Camphor	G	G	G	G	G
Carbitol	G	G	G	G	G
Carbolic Acid (Phenol) <10%	G	G	G	G	G
Carbolic Acid (Phenol) >10%	-	-	-	G	-
Carbon Bisulfide	G	G	G	G	G
Carbon Black	G	G	G	G	G
Carbon Tetrachloride	G	G	G	G	G
Carbonic Acid <10%	G	G	G	G	G
Carbonic Acid >10%	-	-	-	G	-
Carbowax (S)	G	G	G	G	G
Carboxymethyl Cellulose	G	G	G	G	G
Carnauba Wax	G	G	G	G	G
Casein	G	G	G	G	G
Casein Water Paint	G	G	G	G	G
Celite	G	G	G	G	G
Cellosolve (S)	G	G	G	G	G
Cellulose Pulp	G	G	G	G	G
Cellulose Xanthate	G	G	G	G	G
Cement Dry/Air Blow	G	G	G	G	G
Cement Grout	G	G	G	G	G
Cement Slurry	G	G	G	G	G
Ceramic Enamel	G	G	G	G	G
Ceric Oxide	G	G	G	G	G
Chalk	G	G	G	G	G
Chemical Pulp	G	G	G	G	G
Chestnut Tanning	G	G	G	G	G
China Clay	G	G	G	G	G
Chloral Alcoholate	G	G	G	G	G
Chloramine	G	G	G	G	G
Chlorinated Hydrocarbons	G	G	G	G	G
Chlorinated Paperstock	G	G	G	G	G
Chlorinated Solvents	G	G	G	G	G
Chlor Sulphuric Acid	U	U	U	U	U
Chlorinated Wax	G	G	G	G	G
Chlorine Dioxide	U	U	U	U	U
Chlorine Liquid	U	U	U	U	U
Chlorine (Dry)	U	U	U	U	U



This page is part of a complete catalogue containing technical and safety data. All data must be reviewed when selecting a product. Pirtek reserve the right to change technical specifications without notice.

# TECHNICAL DATA

## CHEMICAL RESISTANCE TABLE - ANAEROBICS

AGENT	INDUSTRIAL ANAEROBIC				
	IAS55, IAS57	IAS69, IAS72, IAS77	IAR41, IAR62	IAT43	IAT77
Legend: G = Good C = Conditional U = Unsatisfactory - No Data					
Chloroacetic Acid <10%	G	G	G	G	G
Chloroacetic Acid >10%	-	-	-	G	-
Chlorobenzene (Dry)	G	G	G	G	G
Chlorosulfonic Acid	U	U	U	U	U
Chrome Acid Cleaning <10%	G	G	G	G	G
Chrome Acid Cleaning >10%	-	-	-	G	-
Chrome Liquor <10%	G	G	G	G	G
Chrome Liquor >10%	-	-	-	G	-
Chrome Plating Bath <10%	G	G	G	G	G
Chrome Plating Bath >10%	-	-	-	G	-
Chromic Acid 10%	G	G	G	G	G
Chromic Acid 50% (Cold)	U	U	U	U	U
Chromic Acid 50% (Hot)	U	U	U	U	U
Chromium Acetate	G	G	G	G	G
Chromium Chloride	G	G	G	G	G
Chromium Sulfate	G	G	G	G	G
Classifier	G	G	G	G	G
Clay	G	G	G	G	G
Coal Slurry	G	G	G	G	G
Coal Tar	G	G	G	G	G
Cobalt Chloride	G	G	G	G	G
Copper Ammin Formate	G	G	G	G	G
Copper Chloride	G	G	G	G	G
Copper Cyanide	G	G	G	G	G
Copper Naphthenate	G	G	G	G	G
Copper Plating(Acid Procs)	G	G	G	G	G
Copper Plating(Alk Procs)	G	G	G	G	G
Copper Sulfate	G	G	G	G	G
Core Oil	G	G	G	G	G
Corundum	G	G	G	G	G
Creosote	G	G	G	G	G
Creosote - Cresylic Acid	G	G	G	G	G
Cyanide Solution	G	G	G	G	G
Cyanuric Chloride	G	G	G	G	G
Cyclohexane	G	G	G	G	G
Cylinder Oils	G	G	G	G	G
De-Ionized Water	G	G	G	G	G
De-Ionized Water Low Conductivity	G	G	G	G	G
Detergents	G	G	G	G	G
Developer, photographic	G	G	G	G	G
Dextrin	G	G	G	G	G
Diacetone Alcohol	G	G	G	G	G
Diammonium Phosphate	G	G	G	G	G
Diamylamine	G	G	G	G	G
Diatomaceous Earth Slurr	G	G	G	G	G
Diazo Acetate	G	G	G	G	G
Dibutyl Onthalate	G	G	G	G	G
Dichlorophenol	G	G	G	G	G
Dichloro Ethyl Ether	G	G	G	G	G
Dicyandamide	G	G	G	G	G
Dielectric Fluid	G	G	G	G	G
Diester Lubricants	G	G	G	G	G
Diethyl Ether Dry	G	G	G	G	G
Diethyl Sulfate	G	G	G	G	G
Diethylamine	G	G	G	G	G
Diethylene Glycol	G	G	G	G	G
Diglycolic Acid	G	G	G	G	G
Dimethyl Formamide	G	G	G	G	G
Dimethyl Sulfoxide	G	G	G	G	G

AGENT	INDUSTRIAL ANAEROBIC				
	IAS55, IAS57	IAS69, IAS72, IAS77	IAR41, IAR62	IAT43	IAT77
Legend: G = Good C = Conditional U = Unsatisfactory - No Data					
Dioxane Dry	G	G	G	G	G
Dioxidene	G	G	G	G	G
Dipentene - Pinene	G	G	G	G	G
Diphenyl	G	G	G	G	G
Distilled Water(Indust)	G	G	G	G	G
Dowtherm (S)	G	G	G	G	G
Drying Oil	G	G	G	G	G
Dust - Flue (Dry)	G	G	G	G	G
Dye Liquors	G	G	G	G	G
Emery - Slurry	G	G	G	G	G
Emulsified Oils	G	G	G	G	G
Enamel Frit Slip	G	G	G	G	G
Esters General	G	G	G	G	G
Ethyl Acetate	G	G	G	G	G
Ethyl Alcohol	G	G	G	G	G
Ethyl Amine	G	G	G	G	G
Ethyl Bromide	G	G	G	G	G
Ethyl Cellosolve (S)	G	G	G	G	G
Ethyl Cellosolve Slurry(S)	G	G	G	G	G
Ethyl Formate	G	G	G	G	G
Ethyl Silicate	G	G	G	G	G
Ethylene Diamine	G	G	G	G	G
Ethylene Dibromide	G	G	G	G	G
Ethylene Dichloride	G	G	G	G	G
Ethylene Glycol	G	G	G	G	G
Ethylenediamine T	G	G	G	G	G
Fatty Acids	G	G	G	G	G
Fatty Acids Amine	G	G	G	G	G
Fatty Alcohol	G	G	G	G	G
Ferric - Flocc	G	G	G	G	G
Ferric Chloride	G	G	G	G	G
Ferric Nitrate	G	G	G	G	G
Ferric Sulfate	G	G	G	G	G
Ferrocence - Oil Sol	G	G	G	G	G
Ferrous Chloride	G	G	G	G	G
Ferrous Oxalate	G	G	G	G	G
Ferrous Sulfate 10%	G	G	G	G	G
Ferrous Sulfate (Sat)	G	G	G	G	G
Fertilizer Sol	G	G	G	G	G
Flotation Concentrates	G	G	G	G	G
Fluoride Salts	G	G	G	G	G
Fluorine/Gaseous/Liquid	G	G	G	G	G
Fluorolube	G	G	G	G	G
Fluosilic Acid	G	G	G	G	G
Flux Soldering	G	G	G	G	G
Fly Ash Dry	G	G	G	G	G
Foam Latex Mix	G	G	G	G	G
Foamite	G	G	G	G	G
Formaldehyde (Cold)	G	G	G	G	G
Formaldehyde (Hot)	-	-	-	-	G
Formic Acid (Dil Cold)	G	G	G	G	G
Formic Acid (Dil Hot)	-	-	-	-	G
Formic Acid (Cold)	G	G	G	G	G
Formic Acid (Hot)	-	-	-	-	G
Freon (S)	-	-	-	-	G
Fuel Oil	G	G	G	G	G
Fuming Nitric Red	U	U	U	U	U
Fuming Sulfuric	U	U	U	U	U
Fuming Oleum	U	U	U	U	U
Furfural	G	G	G	G	G

AGENT	INDUSTRIAL ANAEROBIC				
	IAS55, IAS57	IAS69, IAS72, IAS77	IAR41, IAR62	IAT43	IAT77
Legend: G = Good C = Conditional U = Unsatisfactory - No Data					
Gallic Acid <5%	G	G	G	G	G
Gallic Acid >5%	-	-	-	G	-
Gallium Sulfate	G	G	G	G	G
Gasoline - Acid Wash	G	G	G	G	G
Gasoline - Alk Wash	G	G	G	G	G
Gasoline Aviation	G	G	G	G	G
Gasoline Copper Chloride	G	G	G	G	G
Gasoline Ethyl	G	G	G	G	G
Gasoline Motor	G	G	G	G	G
Gasoline Sour	G	G	G	G	G
Gasoline White	G	G	G	G	G
Gluconic Acid	G	G	G	G	G
Glue - Animal Gelatin	G	G	G	G	G
Glue - Plywood	G	G	G	G	G
Glutamic Acid	G	G	G	G	G
Glycerine Lye - Brine	U	U	U	U	U
Glycerol	G	G	G	G	G
Glycine	G	G	G	G	G
Glycine Hydrochloride	G	G	G	G	G
Glycol Amine	G	G	G	G	G
Glycolic Acid	G	G	G	G	G
Glyoxal	G	G	G	G	G
Gold Chloride	G	G	G	G	G
Gold Cyanide	G	G	G	G	G
Granodine	G	G	G	G	G
Grape Pomace Graphite	G	G	G	G	G
Grease Lubricating	G	G	G	G	G
Green Soap	G	G	G	G	G
Grinding Lubricant	G	G	G	G	G
Grit Steel	G	G	G	G	G
Gritty Water	G	G	G	G	G
Groundwood Stock	G	G	G	G	G
GRS Latex	G	G	G	G	G
Gum Paste	G	G	G	G	G
Gypsum	G	G	G	G	G
Halane Sol	G	G	G	G	G
Halogen Tin Plating	G	G	G	G	G
Halowax (S)	G	G	G	G	G
Harvel - Trans Oil	G	G	G	G	G
Heptane	G	G	G	G	G
Hexachlorobenzene	G	G	G	G	G
Hexadiene	G	G	G	G	G
Hexamethylenetetramine	G	G	G	G	G
Hexane	G	G	G	G	G
Hydrazine	G	G	G	G	G
Hydrazine Hydrate	G	G	G	G	G
Hydrobromic Acid <10%	G	G	G	G	G
Hydrobromic Acid >10%	-	-	-	G	-
Hydrochloric Acid	G	G	G	G	G
Hydrocyanic Acid <10%	G	G	G	G	G
Hydrocyanic Acid >10%	-	-	-	G	-
Hydrofluoric Acid	U	U	U	U	U
Hydrogen Peroxide (dil)	G	G	G	G	G
Hydrogen Peroxide(con)	-	-	-	-	G
Hydroponic Sol	G	G	G	G	G
Hydroquinone	G	G	G	G	G
Hypo	G	G	G	G	G
Hypochlorous Acid	G	G	G	G	G
Ink	G	G	G	G	G
Ink in Solvent - Printing	G	G	G	G	G

This page is part of a complete catalogue containing technical and safety data.  
All data must be reviewed when selecting a product.  
Pirtek reserve the right to change technical specifications without notice.



# TECHNICAL DATA

## CHEMICAL RESISTANCE TABLE - ANAEROBICS

AGENT	INDUSTRIAL ANAEROBIC				
	IAS55, IAS57	IAS69, IAS72, IAS77	IAR41, IAR62	IAT43	IAT77
Iodine in Alcohol	G	G	G	G	G
Iodine-Potassium Iodide	G	G	G	G	G
Iodine Solutions	G	G	G	G	G
Ion Exchange Service	G	G	G	G	G
Ion Exclusion Glycol	G	G	G	G	G
Irish Moss Slurry	G	G	G	G	G
Iron Ore Taconite	G	G	G	G	G
Iron Oxide	G	G	G	G	G
Isobutyl Alcohol	G	G	G	G	G
Isobutyraldehyde	G	G	G	G	G
Isooctane	G	G	G	G	G
Isopropyl Alcohol	G	G	G	G	G
Isocyanate Resin	G	G	G	G	G
Isopropyl Acetate	G	G	G	G	G
Isopropyl Ether	G	G	G	G	G
Itaconic Acid	G	G	G	G	G
Jet Fuels	G	G	G	G	G
Jewelers Rouge	G	G	G	G	G
Jig Table Slurry	G	G	G	G	G
Kaolin - China Clay (S)	G	G	G	G	G
Kelp Slurry	G	G	G	G	G
Kerosene	G	G	G	G	G
Kerosene Chlorinated	G	G	G	G	G
Ketone	G	G	G	G	G
Lacquer Thinner	G	G	G	G	G
Lactic Acid	G	G	G	G	G
Lapping Compound	G	G	G	G	G
Latex - Natural	G	G	G	G	G
Latex - Synthetic	G	G	G	G	G
Latex Synthetic Raw	G	G	G	G	G
Laundry Wash Water	G	G	G	G	G
Laundry Bleach	G	G	G	G	G
Laundry Blue	G	G	G	G	G
Laundry Soda	G	G	G	G	G
Lead Arsenate	G	G	G	G	G
Lead Oxide	G	G	G	G	G
Lead Sulfate	G	G	G	G	G
Lignin Extract	G	G	G	G	G
Lime Slaked	G	G	G	G	G
Lime Sulfur Mix	G	G	G	G	G
Liquid Ion Exchange	G	G	G	G	G
Lithium Chloride	G	G	G	G	G
LOX (Liquid O2)	U	U	U	U	U
Ludox	G	G	G	G	G
Lye	U	U	U	U	U
Machine Coating Colour	G	G	G	G	G
Magnesite Slurry	G	G	G	G	G
Magnesite	G	G	G	G	G
Magnesium Bisulfite	G	G	G	G	G
Magnesium Carbonate	G	G	G	G	G
Magnesium Chloride	G	G	G	G	G
Magnesium Hydroxide	G	G	G	G	G
Magnesium Sulfate	G	G	G	G	G
Maleic Acid	G	G	G	G	G
Maleic Anhydride	G	G	G	G	G
Manganese Chloride	G	G	G	G	G
Manganese Sulfate	G	G	G	G	G
Melamine Resin	G	G	G	G	G
Menthol	G	G	G	G	G
Mercaptans	G	G	G	G	G

AGENT	INDUSTRIAL ANAEROBIC				
	IAS55, IAS57	IAS69, IAS72, IAS77	IAR41, IAR62	IAT43	IAT77
Mercuric Chloride	G	G	G	G	G
Mercuric Nitrate	G	G	G	G	G
Mercury	G	G	G	G	G
Mercury Dry	G	G	G	G	G
Methane	G	G	G	G	G
Methyl Alcohol	G	G	G	G	G
Methyl Acetate	G	G	G	G	G
Methyl Bromide	G	G	G	G	G
Methyl Carbitol	G	G	G	G	G
Methyl Cellosolve (S)	G	G	G	G	G
Methyl Chloride	G	G	G	G	G
Methyl Ethyl Ketone	G	G	G	G	G
Methyl Isobutyl Ketone	G	G	G	G	G
Methyl Lactate	G	G	G	G	G
Methyl Orange	G	G	G	G	G
Methylamine	G	G	G	G	G
Methylene Chloride	G	G	G	G	G
Mineral Spirits	G	G	G	G	G
Mixed Acid/Nitric/Sulfuric	U	U	U	U	U
Monochloroacetic Acid	G	G	G	G	G
Morphoniline	G	G	G	G	G
Mud	G	G	G	G	G
Nalco Sol	G	G	G	G	G
Naphtha	G	G	G	G	G
Naphthalene	G	G	G	G	G
Naval Stores Solvent	G	G	G	G	G
Nematocide	G	G	G	G	G
Neoprene Emulsion	G	G	G	G	G
Neoprene Latex	G	G	G	G	G
Nickel Acetate	G	G	G	G	G
Nickel Ammonium Sulfate	G	G	G	G	G
Nickel Chloride	G	G	G	G	G
Nickel Cyanide	G	G	G	G	G
Nickel Fluoborate	G	G	G	G	G
Nickel Ore Fines	G	G	G	G	G
Nickel Plating Bright	G	G	G	G	G
Nickel Sulfate	G	G	G	G	G
Nicotinic Acid <10%	G	G	G	G	G
Nicotinic Acid >10%	-	-	-	G	-
Nitrate Sol	G	G	G	G	G
Nitration Acid(s)	U	U	U	U	U
Nitric Acid	U	U	U	U	U
Nitric Acid <10%	G	G	G	G	G
Nitric Acid 10%	-	-	-	G	-
Nitric Acid 20%	-	-	-	-	G
Nitric Acid Anhydrous	U	U	U	U	U
Nitric Acid Fuming	U	U	U	U	U
Nitro Aryl Sulfonic Acid	G	G	G	G	G
Nitrobenzene - Dry	G	G	G	G	G
Nitrocellulose	G	G	G	G	G
Nitrofurane	G	G	G	G	G
Nitroguanidine	G	G	G	G	G
Nitroparaffins - Dry	G	G	G	G	G
Nitrosyl Chloride	G	G	G	G	G
Norite Carbon	G	G	G	G	G
Nuchar	G	G	G	G	G
Oakite (S) Compound	G	G	G	G	G
Oil, Creosote	G	G	G	G	G
Oil, Emulsified	G	G	G	G	G
Oil, Fuel	G	G	G	G	G

AGENT	INDUSTRIAL ANAEROBIC				
	IAS55, IAS57	IAS69, IAS72, IAS77	IAR41, IAR62	IAT43	IAT77
Oil, Lubricating	G	G	G	G	G
Oil, Soluble	G	G	G	G	G
Oleic Acid (Hot)	G	G	G	G	G
Oleic Acid (Cold)	G	G	G	G	G
Ore Fines - Flotation	G	G	G	G	G
Ore Pulp	G	G	G	G	G
Organic Dyes	G	G	G	G	G
Oxalic Acid (Cold)	G	G	G	G	G
Ozone (Wet)	U	U	U	U	U
Paint - Linseed Base	G	G	G	G	G
Paint - Water Base	G	G	G	G	G
Paint - Remover - Sol Type	G	G	G	G	G
Paint - Vehicles	G	G	G	G	G
Palmitic Acid	G	G	G	G	G
Paper Board Mill Waste	G	G	G	G	G
Paper Coating Slurry	G	G	G	G	G
Paper Pulp	G	G	G	G	G
Paper Pulp with Amun	G	G	G	G	G
Paper Pulp with Dye	G	G	G	G	G
Paper Pulp, bleached	G	G	G	G	G
Paper Pulp, bleach - washed	G	G	G	G	G
Paper Pulp Chlorinated	G	G	G	G	G
Paper Groundwood	G	G	G	G	G
Paper Rag	G	G	G	G	G
Paper Stocks, Fine	G	G	G	G	G
Paradichlorobenzene	G	G	G	G	G
Paraffin Molten	G	G	G	G	G
Paraffin Oil	G	G	G	G	G
Paraformaldehyde	G	G	G	G	G
Pectin Solution Acid	G	G	G	G	G
Pentachlorethane	G	G	G	G	G
Pentaerythritol Sol	G	G	G	G	G
Perchlorethylene (Dry)	G	G	G	G	G
Perchloric Acid <10%	G	G	G	G	G
Perchloric Acid >10%	-	-	-	G	-
Perchloromethyl Mercaptan	G	G	G	G	G
Permanganic Acid	U	U	U	U	U
Persulfuric Acid	U	U	U	U	U
Petroleum Ether	G	G	G	G	G
Petroleum Jelly	G	G	G	G	G
Phenol Formaldehyde Resins	G	G	G	G	G
Phenolic Glue	G	G	G	G	G
Phloroglucinol	G	G	G	G	G
Phosphate Ester	G	G	G	G	G
Phosphatic Sand	G	G	G	G	G
Phosphoric Acid 85% (Hot)	U	U	U	U	U
Phosphoric Acid 85% (Cold)	-	-	-	-	G
Phosphoric Acid 50% (Hot)	-	-	-	-	G
Phosphoric Acid 50% (Cold)	-	-	-	-	G
Phosphoric Acid 10% (Hot)	-	-	-	-	G
Phosphoric Acid 10% (Cold)	G	G	G	G	G
Phosphorous Molten	G	G	G	G	G
Phosphotungstic Acid	G	G	G	G	G
Photographic Sol	G	G	G	G	G
Phthalic Acid	G	G	G	G	G
Phytate	G	G	G	G	G
Phytate Salts	G	G	G	G	G
Pickling Acid, Sulfuric	G	G	G	G	G
Picric Acid Solutions	G	G	G	G	G
Pine Oil Finish	G	G	G	G	G

# TECHNICAL DATA

## CHEMICAL RESISTANCE TABLE - ANAEROBICS

AGENT	INDUSTRIAL ANAEROBIC				
	IAS55, IAS57	IAS69, IAS72, IAS77	IAR41, IAR62	IAT43	IAT77
Legend: G = Good C = Conditional U = Unsatisfactory - No Data					
<b>Plating Sol As follows:</b>	G	G	G	G	G
Brass Cyanide	G	G	G	G	G
Bronze - Cyanide	G	G	G	G	G
Chromium/Cadmium Cyanide	G	G	G	G	G
Cobalt Acid	G	G	G	G	G
Copper Acid	G	G	G	G	G
Gold Cyanide	G	G	G	G	G
Iron - Acid	G	G	G	G	G
Lead - Fluoro	G	G	G	G	G
Nickel Bright	G	G	G	G	G
Platinum	G	G	G	G	G
Silver - Cyanide	G	G	G	G	G
Tin - Acid	G	G	G	G	G
Tin Alk Barrel	G	G	G	G	G
Zinc Acid	G	G	G	G	G
Zinc Alk Cyanide	G	G	G	G	G
Polycrylonitrile Slurry	G	G	G	G	G
Polypentek	G	G	G	G	G
Polysulfide Liquor	G	G	G	G	G
Polyvinyl Acetate Slurry	G	G	G	G	G
Polyvinyl Chloride	G	G	G	G	G
Porcelain Frit	G	G	G	G	G
Potash <10%	G	G	G	G	G
Potash >10%	-	-	-	G	-
Potassium Acetate	G	G	G	G	G
Potassium Alum Sulfate	G	G	G	G	G
Potassium Bromide	G	G	G	G	G
Potassium Carbonate	G	G	G	G	G
Potassium Chlorate	G	G	G	G	G
Potassium Chloride Sol	G	G	G	G	G
Potassium Chromate	G	G	G	G	G
Potassium Cyanide Sol	G	G	G	G	G
Potassium Dichromate	G	G	G	G	G
Potassium Ferricyanide	G	G	G	G	G
Potassium Hydroxide	U	U	U	U	U
Potassium Iodide	G	G	G	G	G
Potassium Nitrate	G	G	G	G	G
Potassium Perchlorate	G	G	G	G	G
Potassium Permanganate	G	G	G	G	G
Potassium Persulfate	G	G	G	G	G
Potassium Phosphate	G	G	G	G	G
Potassium Silicate	G	G	G	G	G
Potassium Sulfate	G	G	G	G	G
Potassium Xanthate	G	G	G	G	G
Press Board Waste	G	G	G	G	G
Propionic Acid	G	G	G	G	G
Propyl Alcohol	G	G	G	G	G
Propyl Bromide	G	G	G	G	G
Propylene Glycol	G	G	G	G	G
Pumice	G	G	G	G	G
Pyranol	G	G	G	G	G
Pyridine	G	G	G	G	G
Pyrogallol Acid	G	G	G	G	G
Pyrogen Free Water	G	G	G	G	G
Pyrole	G	G	G	G	G
Pyromellitic Acid	G	G	G	G	G
Quebracho Tannin	G	G	G	G	G
Rag Stock Bleached	G	G	G	G	G
Rare Earth Salts	G	G	G	G	G
Rayon Acid Water	G	G	G	G	G

AGENT	INDUSTRIAL ANAEROBIC				
	IAS55, IAS57	IAS69, IAS72, IAS77	IAR41, IAR62	IAT43	IAT77
Legend: G = Good C = Conditional U = Unsatisfactory - No Data					
Rayon Spin Bath	G	G	G	G	G
Rayong Spin Bath spent	G	G	G	G	G
Resorcinol	G	G	G	G	G
River Water	G	G	G	G	G
Road Oil	G	G	G	G	G
Roccal	G	G	G	G	G
Rosin - Wood	G	G	G	G	G
Rosin in Alcohol	G	G	G	G	G
Rosin Size	G	G	G	G	G
Rubber Latex	G	G	G	G	G
Safrole	G	G	G	G	G
Salt Alkaline	G	G	G	G	G
Salt Electrolytic	G	G	G	G	G
Salt Refrg	G	G	G	G	G
Sand - Air Brown Slurry	G	G	G	G	G
Sand - Air Phosphatic	G	G	G	G	G
Sea Coal	G	G	G	G	G
Sea Water	G	G	G	G	G
Selenium Chloride	G	G	G	G	G
Sequestrene	G	G	G	G	G
Sewage	G	G	G	G	G
Shellac	G	G	G	G	G
Shower Water	G	G	G	G	G
Silica Gel	G	G	G	G	G
Silica Ground	G	G	G	G	G
Silicone Tetrachloride	G	G	G	G	G
Silicone Fluids	G	G	G	G	G
Silver Cyanide	G	G	G	G	G
Silver Iodide - Aqu	G	G	G	G	G
Silver Nitrate	G	G	G	G	G
Size Emulsion	G	G	G	G	G
Skelly Solve EL	G	G	G	G	G
Slate to 400 Mesh	G	G	G	G	G
Soap Lye	U	U	U	U	U
Soap Solutions(Stearates)	G	G	G	G	G
Soap Stone Air Blown	G	G	G	G	G
Soda Pulp	G	G	G	G	G
Sodium Acetate	G	G	G	G	G
Sodium Acid Fluoride	G	G	G	G	G
Sodium Aluminate	G	G	G	G	G
Sodium Arsenate	G	G	G	G	G
Sodium Benzene Sulfonate	G	G	G	G	G
Sodium Bichromate	G	G	G	G	G
Sodium Bisulfite	G	G	G	G	G
Sodium Bromide	G	G	G	G	G
Sodium Carbonate	G	G	G	G	G
Sodium Chlorate	G	G	G	G	G
Sodium Chlorite	G	G	G	G	G
Sodium Cyanide	G	G	G	G	G
Sodium Ferricyanide	G	G	G	G	G
Sodium Formate	G	G	G	G	G
Sodium Glutamate	G	G	G	G	G
Sodium Hydrogen Sulfate	G	G	G	G	G
Sodium Hydrosulfite	G	G	G	G	G
Sodium Hydrosulfide	G	G	G	G	G
Sodium Hydrochloride	G	G	G	G	G
Sodium Hydro 20% (Cold)	G	G	G	G	G
Sodium Hydro 20% (Hot)	-	-	-	-	G
Sodium Hydro 50% (Cold)	-	-	-	-	G
Sodium Hydro 50% (Hot)	U	U	U	U	U

AGENT	INDUSTRIAL ANAEROBIC				
	IAS55, IAS57	IAS69, IAS72, IAS77	IAR41, IAR62	IAT43	IAT77
Legend: G = Good C = Conditional U = Unsatisfactory - No Data					
Sodium Hydro 70% (Cold)	-	-	-	-	G
Sodium Hydro 70% (Hot)	U	U	U	U	U
Sodium Hypochlorite	G	G	G	G	G
Sodium Lignosulfonate	G	G	G	G	G
Sodium Metasilicate	G	G	G	G	G
Sodium Molten	G	G	G	G	G
Sodium Nitrate	G	G	G	G	G
Sodium Nitrite - Nitrate	G	G	G	G	G
Sodium Perborate	G	G	G	G	G
Sodium Peroxide	U	U	U	U	U
Sodium Persulfate	G	G	G	G	G
Sodium Phosphate - Mono	G	G	G	G	G
Sodium Phosphate - Tri	G	G	G	G	G
Sodium Potassium Chloride	G	G	G	G	G
Sodium Salicylate	G	G	G	G	G
Sodium Sesquicarbonate	G	G	G	G	G
Sodium Silicate	G	G	G	G	G
Sodium Silcofluoride	G	G	G	G	G
Sodium Stannate	G	G	G	G	G
Sodium Sulfate	G	G	G	G	G
Sodium Sulfide	G	G	G	G	G
Sodium Sulfite	G	G	G	G	G
Sodium Thiocyanate	G	G	G	G	G
Sodium Thiosulfate	G	G	G	G	G
Sodium Tungstate	G	G	G	G	G
Sodium Xanthate	G	G	G	G	G
Solox - Denat Ehtanol	G	G	G	G	G
Soluble Oil	G	G	G	G	G
Solvent Naphthas	G	G	G	G	G
Sorbic Acid	G	G	G	G	G
Sour Gasoline	G	G	G	G	G
Soybean Sludge - Acid	G	G	G	G	G
Spensol Solution	G	G	G	G	G
Stannic Chloride	G	G	G	G	G
Starch	G	G	G	G	G
Starch base	G	G	G	G	G
Stearic Acid	G	G	G	G	G
Steep Water	G	G	G	G	G
Sterilization Steam	G	G	G	G	G
Stillage Distillers	G	G	G	G	G
Stoddard Solvent	G	G	G	G	G
Styrene	G	G	G	G	G
Styrene Butadiene Latex	G	G	G	G	G
Sulfamic Acid	G	G	G	G	G
Sulfan - Sulfuric Anhydride	G	G	G	G	G
Sulfathiazole	G	G	G	G	G
Sulfite Liquor	G	G	G	G	G
Sulfite Stock	G	G	G	G	G
Sulfonated Oils	G	G	G	G	G
Sulfones	G	G	G	G	G
Sulfonice Acids	G	G	G	G	G
Sulfonyl Chloride	G	G	G	G	G
Sulfur Slurry	G	G	G	G	G
Sulfur Solution	G	G	G	G	G
in Carbon Disulfide	G	G	G	G	G
Sulphuric Acid 0 - 7%	-	-	-	-	G
Sulphuric Acid 7 - 40%	-	-	-	-	G
Sulphuric Acid 40 - 75%	U	U	U	U	U
Sulphuric Acid 75 - 95%	U	U	U	U	U
Sulphuric Acid 95 - 100%	-	-	-	-	G

This page is part of a complete catalogue containing technical and safety data.  
All data must be reviewed when selecting a product.  
Pirtek reserve the right to change technical specifications without notice.





# TECHNICAL DATA

## CHEMICAL RESISTANCE TABLE - ANAEROBICS

AGENT	INDUSTRIAL ANAEROBIC				
	IAS55, IAS57	IAS69, IAS72, IAS77	IAR41, IAR62	IAT43	IAT77
Legend: G = Good C = Conditional U = Unsatisfactory - No Data					
Sulphurous Acid	-	-	-	-	G
Sulfuryl Chloride	G	G	G	G	G
Surfactants	G	G	G	G	G
Synthetic Latex	G	G	G	G	G
Tactonite - Fines	G	G	G	G	G
Talc - Slurry	G	G	G	G	G
Tankage - Slurry	G	G	G	G	G
Tannic Acid (Cold)	-	-	-	-	G
Tarmin	G	G	G	G	G
Tar & Tar Oil	G	G	G	G	G
Tartaric Acid	G	G	G	G	G
Television Chemicals	G	G	G	G	G
Tergitol (S)	G	G	G	G	G
Terpineol	G	G	G	G	G
Tertraethyl Lead	G	G	G	G	G
Tetrahydrofuran	G	G	G	G	G
Tetranitromethane	G	G	G	G	G
Textile Dyeing	G	G	G	G	G
Textile Finishing Oil	G	G	G	G	G
Textile Printing Oil	G	G	G	G	G
Thiocyanic Acid	G	G	G	G	G
Thioglycolic Acid	G	G	G	G	G
Thionyl Chloride	G	G	G	G	G
Thiophosphoryl Chloride	G	G	G	G	G
Thiourea	G	G	G	G	G
Thorium Nitrate	G	G	G	G	G
Thymol	G	G	G	G	G
Tin Tetrachlorida	G	G	G	G	G
Tinning Sol DuPont	G	G	G	G	G
Titania Paper Coating	G	G	G	G	G
Titanium Oxide Slurry	G	G	G	G	G
Titanium Oxy Sulfate	G	G	G	G	G
Titanium Sulfate	G	G	G	G	G
Titanium Tetrachloride	G	G	G	G	G
Toluol	G	G	G	G	G
Toluene	G	G	G	G	G
p - Toluene Sulfonic Acid	-	-	-	-	G
Transil Oil	G	G	G	G	G
Trichloroacetic Acid	G	G	G	G	G
Trichlorethane 1,1,1	G	G	G	G	G
Trichlorethylene	G	G	G	G	G
Trichlorethylene - Dry	G	G	G	G	G
Tricresyl Phosphate	G	G	G	G	G
Triethanolamine	G	G	G	G	G
Triethylene Glycol	G	G	G	G	G
Trioxane	G	G	G	G	G
Tungstic Acid	G	G	G	G	G
Turpentine	G	G	G	G	G
UCON (S) Lube	G	G	G	G	G
Udylite Bath - Nickel	G	G	G	G	G
Undecylenic Acid	G	G	G	G	G
Unichrome Sol Alk	G	G	G	G	G
Uranium Salts	G	G	G	G	G
Uranyl Nitrate	G	G	G	G	G
Uranyl Sulfate	G	G	G	G	G
Urea Ammonia Liquor	G	G	G	G	G
Vacuum to 100 Micron	G	G	G	G	G
Vacuum 100 Micron	G	G	G	G	G
Vacuum Oil	G	G	G	G	G
Vanadium Pentoxide	G	G	G	G	G

AGENT	INDUSTRIAL ANAEROBIC				
	IAS55, IAS57	IAS69, IAS72, IAS77	IAR41, IAR62	IAT43	IAT77
Legend: G = Good C = Conditional U = Unsatisfactory - No Data					
Slurry	G	G	G	G	G
Varnish	G	G	G	G	G
Varsol - Naphtha Solv	G	G	G	G	G
Versene (S)	G	G	G	G	G
Vinyl Acetate Dry or Chloride Monomer	G	G	G	G	G
Vinyl Chloride Latex Emul	G	G	G	G	G
Vinyl Resin Slurry	G	G	G	G	G
Viscose	G	G	G	G	G
Vortex - Hydroclone	G	G	G	G	G
Water - Acid Below pH7	G	G	G	G	G
Water pH7 to 8	G	G	G	G	G
Water Alkaline-Over pH8	G	G	G	G	G
Water Mine Water	G	G	G	G	G
Water Potable	-	-	-	G	-
Water River	G	G	G	G	G
Water Sandy	G	G	G	G	G
Water 'White' low pH	G	G	G	G	G
Water 'White' high pH	G	G	G	G	G
Wax Chlorinated	G	G	G	G	G
Wax Emulsions	G	G	G	G	G
Weed Killer Dirbromide	G	G	G	G	G
Weisberg Sulfate Plating	G	G	G	G	G
Wood ground pulp	G	G	G	G	G
Wort Lines	G	G	G	G	G
X - Ray Developing Bath	G	G	G	G	G
Xylene	G	G	G	G	G
Zelan	G	G	G	G	G
Zeolite Water	G	G	G	G	G
Zinc Acetate	G	G	G	G	G
Zinc Bromide	G	G	G	G	G
Zinc Chloride	G	G	G	G	G
Zinc Cyanide - Alk	G	G	G	G	G
Zinc Fines Slurry	G	G	G	G	G
Zinc Flux Paste	G	G	G	G	G
Zinc Galvanizing	G	G	G	G	G
Zinc Hydrosulfite	G	G	G	G	G
Zinc Oxide in Water	G	G	G	G	G
Zinc Oxide in Oil	G	G	G	G	G
Zinc Sulfate	G	G	G	G	G
Zincolate	G	G	G	G	G
Zirconyl Nitrate	G	G	G	G	G
Zirconyl Sulfate	G	G	G	G	G

GASES	INDUSTRIAL ANAEROBIC				
	IAS55, IAS57	IAS69, IAS72, IAS77	IAR41, IAR62	IAT43	IAT77
Legend: G = Good C = Conditional U = Unsatisfactory - No Data					
Acetylene	G	G	G	G	G
Acid & Alkali Vapors	G	G	G	G	G
Air	G	G	G	G	G
Amine	G	G	G	G	G
Ammonia	G	G	G	G	G
Butane	G	G	G	G	G
Butadiene Gas/Liquid	G	G	G	G	G
Butylene Gas/Liquid	G	G	G	G	G
By-Product Gas (Dry)	G	G	G	G	G
Carbon Dioxide	G	G	G	G	G
Carbon Disulfide	G	G	G	G	G
Carbon Monoxide	G	G	G	G	G
Chloride (Dry)	G	G	G	G	G
Chlorine (Dry)	U	U	U	U	U
Chlorine (Wet)	U	U	U	U	U
Coke-Oven Gas (Cold)	G	G	G	G	G
Coke-Oven Gas (Hot)	-	-	-	-	G
Cyanogen Chloride	G	G	G	G	G
Cyanoegen Gas	G	G	G	G	G
Ethane	G	G	G	G	G
Ether-see Diethyl Ether	G	G	G	G	G
Ethylene	G	G	G	G	G
Ethylene Oxide	G	G	G	G	G
Freon (S) (11-12-21-22)	-	-	-	-	G
Furnace Gas (Cold)	-	-	-	-	G
Furnace Gas (Hot)	G	G	G	G	G
Gas Drip Oil	G	G	G	G	G
Gas Flue	G	G	G	G	G
Gas Manufacturing	G	G	G	G	G
Gas Natural	G	G	G	G	G
Helium	G	G	G	G	G
Hydrogen Gas - Cold	G	G	G	G	G
Hydrogen Chloride	G	G	G	G	G
Hydrogen Cyanide	G	G	G	G	G
Hydrogen Sulfide-W/D	G	G	G	G	G
Isobutane	G	G	G	G	G
Methane	G	G	G	G	G
Methyl Chloride	G	G	G	G	G
Natural Gas - Dry	G	G	G	G	G
Nitrogen Gas	G	G	G	G	G
Nitrous Oxide	G	G	G	G	G
Oil - Solvent Vapor	G	G	G	G	G
Oxygen	U	U	U	U	U
Ozone	U	U	U	U	U
Producer Gas 50 PSI	G	G	G	G	G
Propane	G	G	G	G	G
Propylene	G	G	G	G	G
Steam H Pressure ("70 psi)	U	U	U	U	U
Steam L Pressure ("70 psi)	G	G	G	G	G
Sulfur Dioxide	G	G	G	G	G
Sulfure Dioxide Dry	G	G	G	G	G
Sulfur Trioxide Gas	G	G	G	G	G
Sulfuric Acid Vapor	U	U	U	U	U

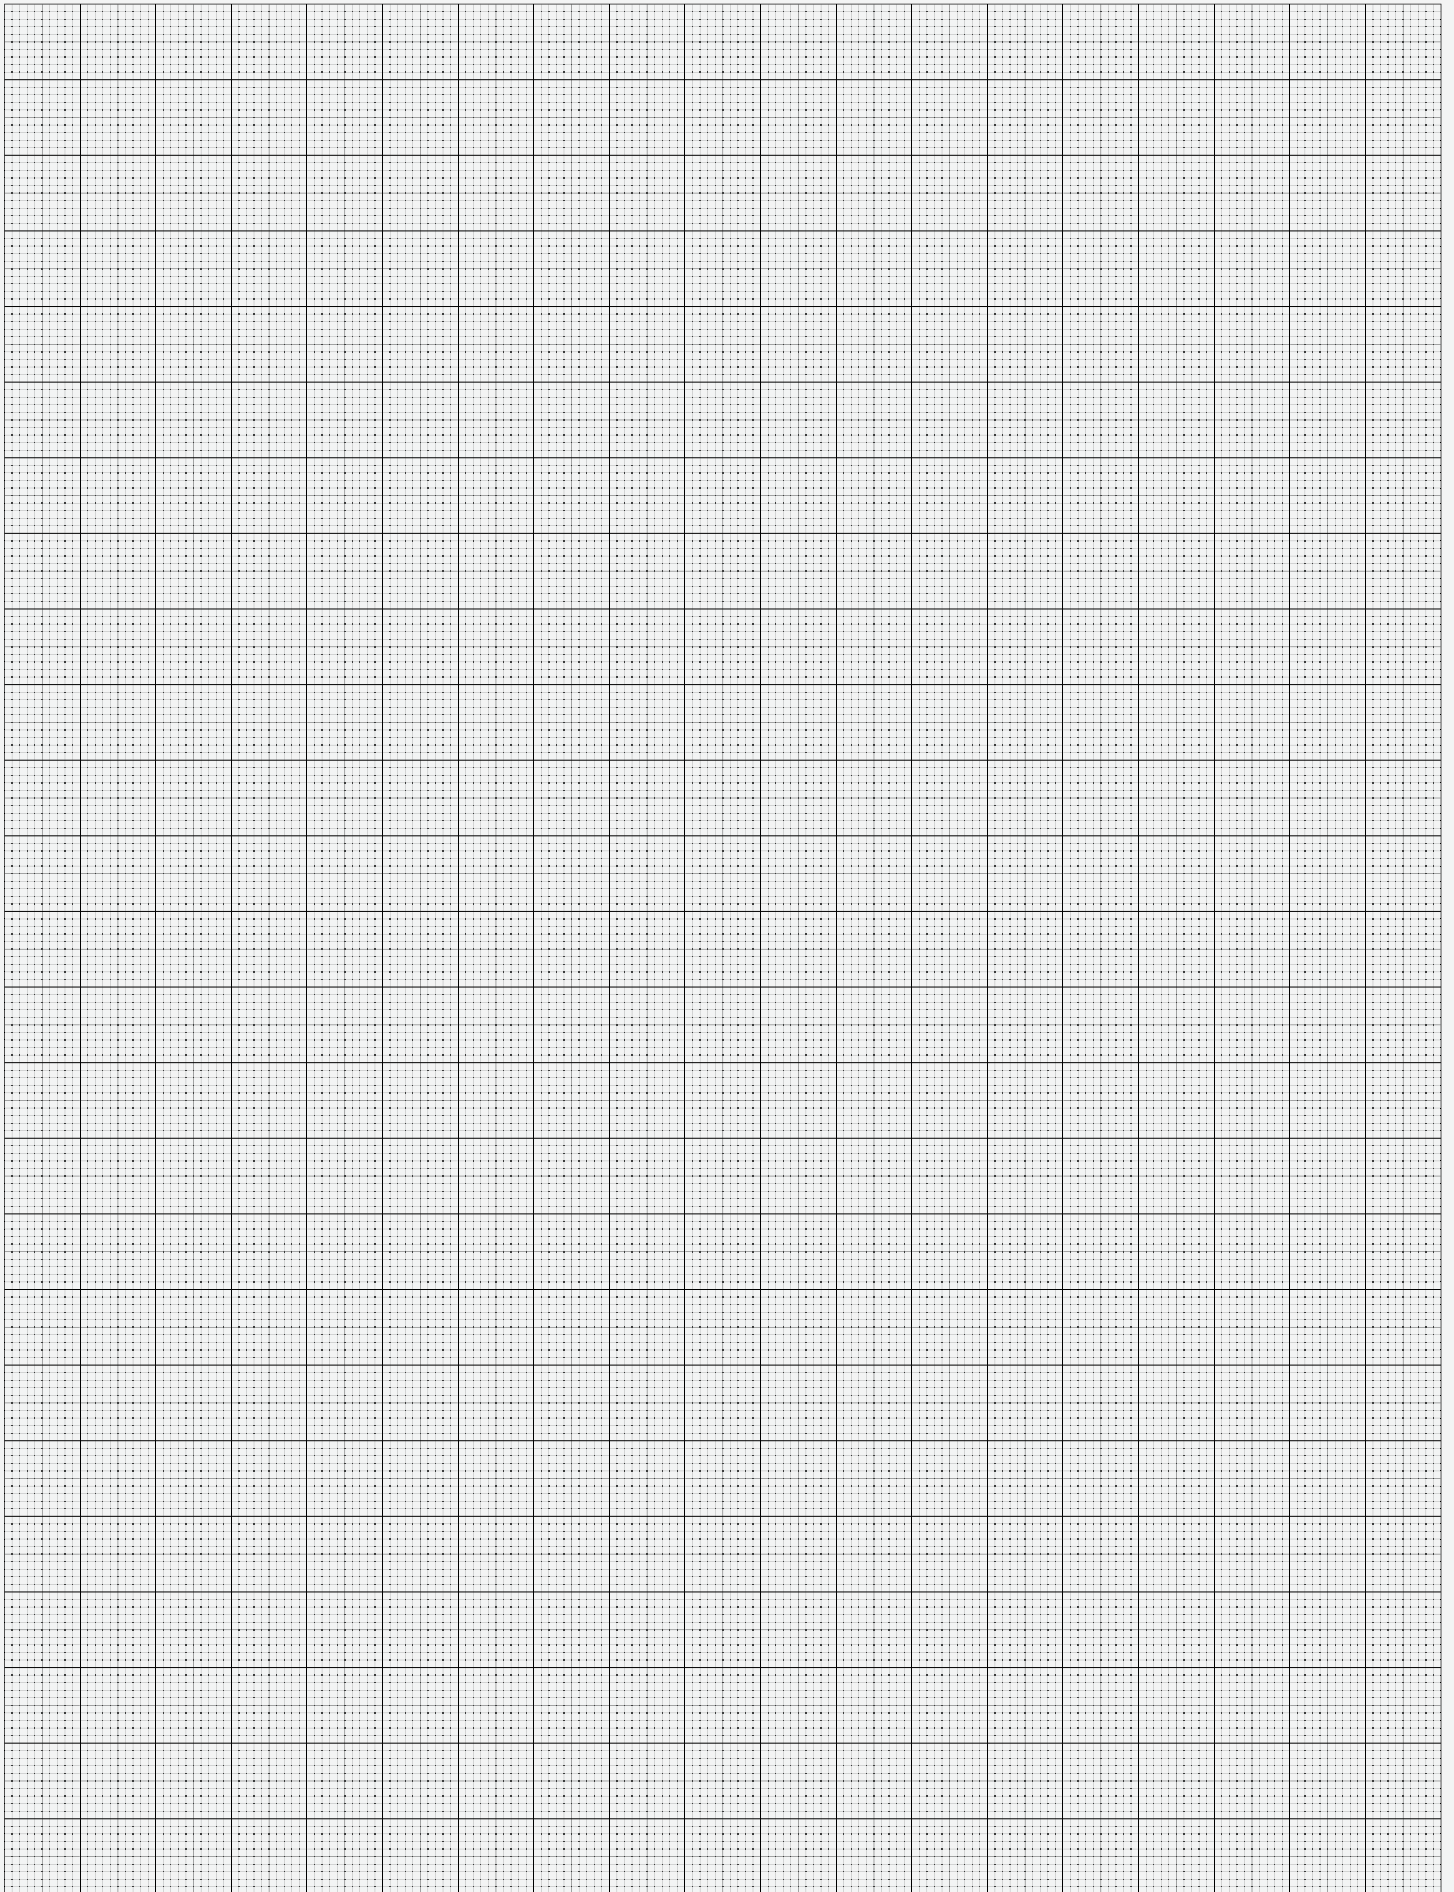

# AUTOMOTIVE HOSES

## PACKAGED SPOOLS


### FOR WORKSHOP & HOME



## P26

### AUTO

### LPG VAPOUR HOSE

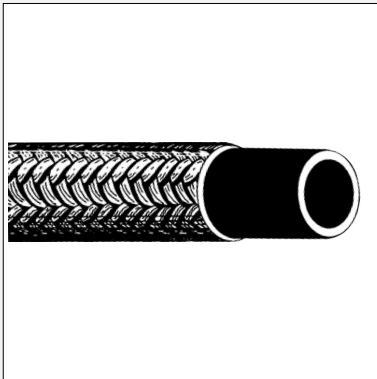


Product Code		Dimensions				Working Pressure	Bend Radius	Weight
		Inside Dia.		Wall	O.D.			
20 meter spool		mm	ins	mm	mm	bar	mm	g/m
P2601120		12	1/2	3.2	18.4	10	60	255
P2601170		17	21/32	3.5	23.4	10	80	330
P2601250		25	1	4.5	34	10	100	710

- Specifically designed to carry vapours from automotive LPG conversions
- Neoprene based tube
- Braided cotton outer reinforcement
- Oil and petrol resistant
- 20 meter coil lengths

## P3111

### AUTO

### FUEL HOSE

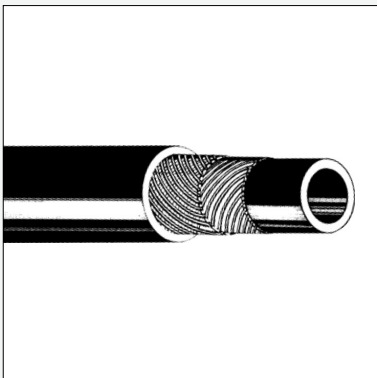


Product Code		Dimensions				Working Pressure	Bend Radius	Weight
		Inside Dia.		Wall	O.D.			
7 meter spool	30 meter spool	mm	ins	mm	mm	bar	mm	g/m
P3111048	P3111048-R	4.8	3/16	3.0	10.8	12	15	110
P3111063	P3111063-R	6.3	1/4	3.2	12.7	12	20	140
P3111079	P3111079-R	7.9	5/16	3.4	14.7	12	25	160
P3111095	P3111095-R	9.5	3/8	3.6	16.7	12	40	210

- Designed to carry automotive fuel
- Temperature range from -30° C to +100° C
- Dual spiral wrap reinforcement
- Conforms to SAE 30 R6
- Safety factor of 5:1.
- Hose is **not suitable for submersion** in tank

## P311T

### AUTO

### TRANSMISSION COOLER HOSE

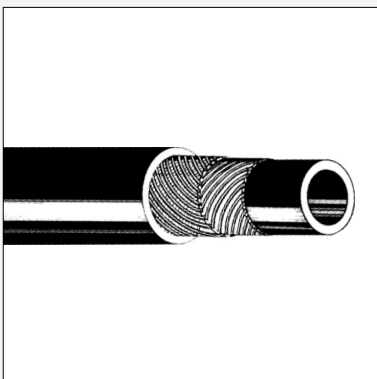

Product Code		Dimensions				Working Pressure	Bend Radius	Weight
		Inside Dia.		Wall	O.D.			
7 meter spool	30 meter spool	mm	ins	mm	mm	bar	mm	g/m
P311T079	P311T079-R	7.9	5/16	3.4	14.7	12	25	160
P311T095	P311T095-R	9.5	3/8	3.6	16.7	12	40	210

- For use with modern automatic transmissions
- Nitrile inner liner
- Polyester reinforcement
- Neoprene cover resistant to oil, fuel and heat
- Temperature range from -40° C to +135° C
- Manufactured to SAE 30 R6 Specification


# AUTOMOTIVE HOSES

PACKAGED SPOOLS  
FOR WORKSHOP & HOME



## P3300

AUTO  
VACUUM AND WASHER HOSE

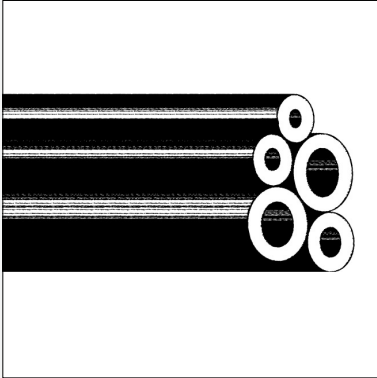


Product Code		Dimensions						
		Inside Dia.		Wall	O.D.			
15 meter spool		mm	ins	mm	mm			
P3300025		2.5	7/64	2	6.5			
P3300030		3.0	1/8	2	7.0			
P3300040		4.0	5/32	2	8.0			
P3300045		4.5	11/64	2	8.5			
P3300055		5.5	7/32	2	10.0			
P3300063		6.3	1/4	2	10.5			

- For use in windscreen washer systems and vacuum operated controls
- Manufactured from EPDM rubber
- Withstands the pressure exerted by windscreen washer systems and control system vacuum
- Heat and weather resistant
- Manufactured to SAE-J-200 Specification

## P3300

AUTO  
RADIATOR OVERFLOW HOSE

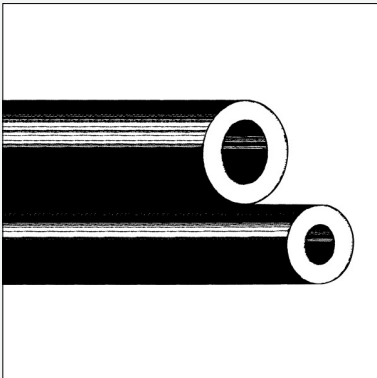


Product Code		Dimensions						
		Inside Dia.		Wall	O.D.			
15 meter spool		mm	ins	mm	mm			
P3300079		8	5/16	2	12			
P3300095		10	3/8	2	14			

- Suitable for radiator overflow and header tank applications
- Manufactured from EPDM rubber
- Withstand radiator temperatures and pressures as well as vacuum
- Weather, oil and radiator additive resistant

## P4205

AUTO  
BRAKE VACUUM HOSE

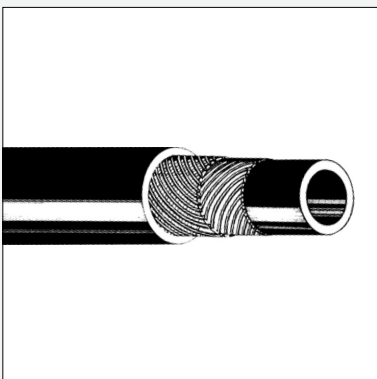

Product Code		Dimensions				Vacuum	Bend Radius	Weight
		Inside Dia.		Wall	O.D.			
7 mete spool	30 meter spool	mm	ins	mm	mm	bar	mm	g/m
P4205095	P4205095-R	9.5	11/32	4	17.5	0.87	30	252
P4205120	P4205120-R	12.5	15/32	4	20.0	0.87	40	299

- Designed to transmit manifold vacuum in automotive power assisted braking systems.
- Neoprene liner and cover
- Rayon reinforcement
- Conforms to SAE J 1403
- Resistant to oil, petrol, heat and weather

# AUTOMOTIVE HOSES


## PACKAGED SPOOLS

### FOR WORKSHOP & HOME



## P4801

### AUTO HEATER HOSE

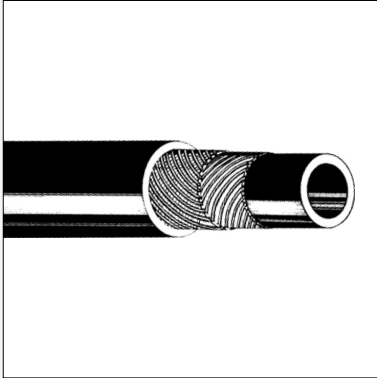


Product Code		Dimensions				Working Pressure	Bend Radius	Weight
		Inside Dia.		Wall	O.D.			
15 meter spool	50 meter spool	mm	ins	mm	mm	bar	mm	g/m
	<b>P4801095-R *</b>	9.5	3/8	3.75	17.0	15	50	220
<b>P4801127</b>	<b>P4801127-R</b>	12.7	1/2	3.40	19.5	15	50	240
<b>P4801160</b>	<b>P4801160-R</b>	16.0	5/8	3.40	22.8	15	80	290
<b>P4801191</b>	<b>P4801191-R</b>	19.0	3/4	3.60	26.3	15	100	360

- \* 25 meter roll length in this size
- Developed for vehicle coolant systems
- Safety factor of 3:1
- Temperature range of -40° C to +100° C
- Made from a rubber and EPDM blend
- Reinforced with a double braid spiral wrap
- Conforms to SAE 20 R3
- Weather resistant
- Impervious to coolant system additives
- Not suitable for use with petrochemical products

## P5130

### AUTO POWER STEERING RETURN HOSE

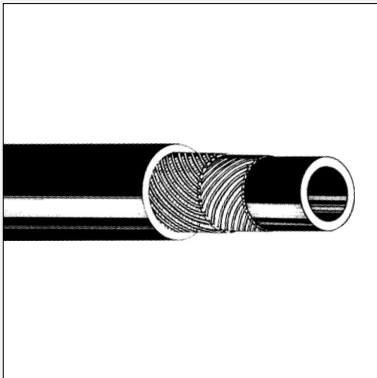


Product Code		Dimensions				Working Pressure	Bend Radius	Weight
		Inside Dia.		Wall	O.D.			
7 meter spool	30 meter spool	mm	ins	mm	mm	bar	mm	g/m
<b>P5130079</b>	<b>P5130079-R</b>	7.9	5/16	4.0	16.0	16	25.0	224
<b>P5130100</b>	<b>P5130100-R</b>	10	3/8	4.0	18.0	16	40.0	242

- Designed specifically as low pressure side return hose for vehicle power steering systems
- Nitrile inner liner
- Polyester double braid reinforcement
- Neoprene cover
- Resistant to oil, fuel and heat
- Operating temperature range is -40° C to +121° C
- Safety factor of 4:1
- Conforms to SAE J 189 Specification

## P525

### AUTO EFI FUEL INJECTION HOSE

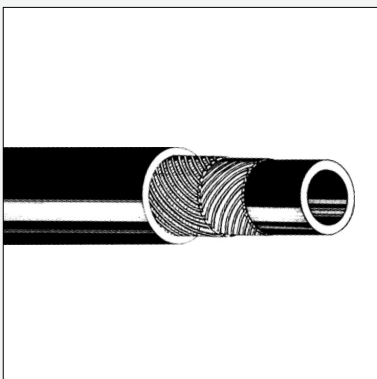


Product Code		Dimensions				Working Pressure	Bend Radius	Weight
		Inside Dia.		Wall	O.D.			
7 meter spool		mm	ins	mm	mm	bar	mm	g/m
<b>P5250075</b>		7.5	5/16	3.1	13.7	14	40	210

- A high performance fuel hose designed to run at higher pressures and temperatures than normal systems
- NBR/PVC inner tube
- CSM cover
- Kuralon reinforcement
- Conforms to SAE J30 R7 and GME 08001E Specifications


# AUTOMOTIVE HOSES

PACKAGED SPOOLS  
FOR WORKSHOP & HOME

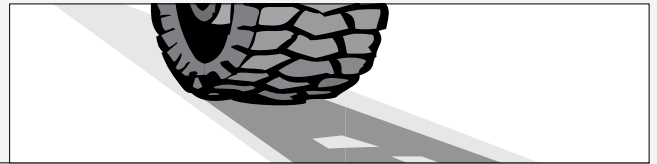

## PCH-A

### AUTO GENERAL HOSE MERCHANDISER

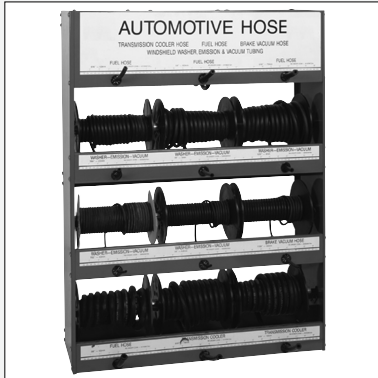


PCH-A General Hose Merchandiser							
Qty	Pack	Product Code	Description	Inside Diameter		Length	Page
				mm	ins		
1	Spool	P4205095	Brake Vacuum	9.5	11/32	7	56
2	Spool	P311T079	Transmission Cooler	7.9	5/16	7	55
1	Spool	P3111048	Fuel	4.8	3/16	7	55
1	Spool	P3111063	Fuel	6.3	1/4	7	55
1	Spool	P3111079	Fuel	7.9	5/16	7	55
1	Spool	P3111095	Fuel	9.5	3/8	7	55
1	Spool	P3300025	Vacuum & Washer	2.5	7/64	15	56
1	Spool	P3300030	Vacuum & Washer	3.0	1/8	15	56
1	Spool	P3300040	Vacuum & Washer	4.0	5/32	15	56
1	Spool	P3300055	Vacuum & Washer	5.5	7/32	15	56
1	Spool	P2200063	Vacuum & Washer	6.3	1/4	15	56

- A robustly made powder coated steel cabinet designed to hold 12 spools of hose
- Can be displayed as a free standing unit or mounted to the wall.
- Features metric and imperial measuring scales
- Allows front loading of stock
- Hose type and sizing is clearly marked
- Dimensions (mm): W x H x D 720 x 970 x 220

## PCH-B

### AUTO HEATER HOSE MERCHANDISER

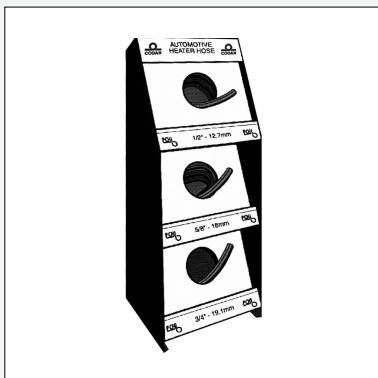


PCH-B Heater Hose Merchandiser							
Qty	Pack	Product Code	Description	Inside Diameter		Length	Page
				mm	ins		
1	Spool	P4801127	Heater Hose	12.7	1/2	15	57
2	Spool	P4801160	Heater Hose	16	5/8	15	57
1	Spool	P4801191	Heater Hose	19	3/4	15	57

- A robustly made powder coated steel cabinet designed to hold 3 popular sizes of heater hose
- Free standing unit
- Features metric and imperial measuring scales
- Allows front loading of stock
- Hose type and sizing is clearly marked
- Dimensions (mm): W x H x D 480 x 1200 x 430

## 4523

### HAND CUTTER SUIT AUTO AND AIR CON HOSES, SYNDFLEX, NYLON ETC

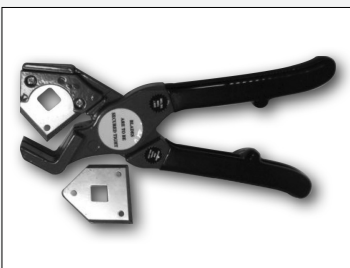

4523 Hand Cutting Tool	
Product Code	Description
4523-04006	Hand Cutter for Hose and Tube - New Style
4523-04005	Replacement Blade for Hand Cutter 4523-04006

- A robustly made hand cutting tool for cleanly cutting a wide range of hose and tube products
- Replaceable blade

## 3981

### BRASS FERRULES FOR LOW PRESSURE HOSES



Product Code	Inside Diameter	Length
3981-04	12.6	25.4
3981-05	13.8	12.3
3981-06	16.6	25.4
3981-08	20.6	25.4

This page is part of a complete catalogue containing technical and safety data.  
All data must be reviewed when selecting a product.  
Pirtek reserve the right to change technical specifications without notice.



# AIR CONDITIONING ASSEMBLIES



## ACH AUTO AIR CONDITIONING HOSE (REDUCED BARRIER)



Product Code	Dimensions			Inside Diameter mm		Outside Diameter mm		Weight Kg/m
	Dash Size	Nominal Dia.		min	max	min	max	
		mm	ins					
ACH-06	6	8	5/16	7.9	8.6	14.2	15.2	0.13
ACH-08	8	10	13/32	10.4	11.2	16.8	17.8	0.18
ACH-10	10	12	1/2	12.5	13.5	18.9	19.9	0.19
ACH-12	12	16	5/8	15.6	16.6	23.1	24.1	0.30

### Specifications

- Chloroprene blend tube compound
- Extruded polyamide barrier for low permeation
- Single braid polyester reinforcement
- Chlorobutyl cover compound for low moisture ingress
- Permeation: 2.3- 2.6 Kg/m<sup>2</sup>/yr (tested at 80°C)
- Moisture Ingression: 0.033g/cm<sup>2</sup>/yr
- Temperature Range of -40°C to +135°C
- Meets SAE J2064 Type C Class I

### Features

- Light weight and flexible for easy routing
- Compatible with R134a and many other vehicular refrigerants
- Compatible with PAG (Polyalkylene glycol) oil and other popular lubricants

## ACW AUTO AIR CONDITIONING WELD ON HOSE TAILS (LIFE SAVERS)



Product Code	Tube Size (ins)	Hose Tail Size	
		Dash	Actual
<b>Aluminium Tails</b>			
ACWA1-0606	3/8"	-06	5/16"
ACWA1-0808	1/2"	-08	13/32"
ACWA1-0810	1/2"	-10	1/2"
ACWA1-1010	5/8"	-10	1/2"
ACWA1-1210	3/4"	-10	1/2"
ACWA1-1212	3/4"	-12	5/8"
<b>Steel Tails</b>			
ACWS1-0606	3/8"	-06	5/16"
ACWS1-0808	1/2"	-08	13/32"
ACWS1-1010	5/8"	-10	1/2"
ACWS1-1212	3/4"	-12	5/8"


## ACF\* FERRULES TO SUIT REDUCED BARRIER AIR CONDITIONING HOSE



Product Code	Description
ACF-06	Steel ferrule to suit 5/16" ACH Air Con hose
ACF-08	Steel ferrule to suit 13/32" ACH Air Con hose
ACF-10	Steel ferrule to suit 1/2" ACH Air Con hose
ACF-12	Steel ferrule to suit 5/8" ACH Air Con hose

\* Use hydraulic hand held crimper (beadlock / bubble style) with reduced barrier crimp dies. (Refer to Pirtek Assembly Procedure Document WI-0902-34)

# AIR CONDITIONING ASSEMBLIES

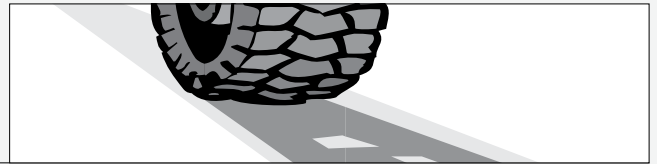

## ACABR AUTO AIR CONDITIONING ALUMINIUM BRAZING RODS



Product Code	Description
ACABR	Pack of 25 Aluminium brazing rods with flux core

**Application**

Used to braze Aluminium Weld-On tails to Air Con Tube

## ACNBL AUTO AIR CONDITIONING LUBRICANT / SEALANT



Product Code	Description
ACNBL	30 ml Nylog Blue Lubricant / Sealant


**Specifications**

- a synthetic refrigeration oil
- compatible with mixtures of POE (Polyolester oil), PAG, mineral and alkyl benzene oils in the presence of HFC-134a, cross blends of CFC and HCFC refrigerants as well as R-410a in POE and PVE (Polyvinylether) lubricants

**Features**

- Non-hardening, non-drying fluid
- bonds tenaciously to many different substrates
- acts as a gasket thread sealant and assembly lube
- Can be used universally or specifically with an HFC bound synthetic oil system

## ACOR AUTO AIR CONDITIONING O-RINGS

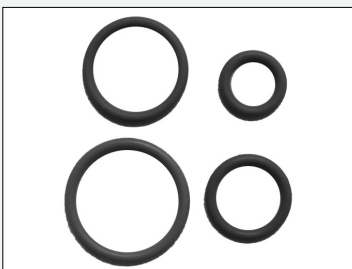

Product Code	Description
ACOR-6	Air Con O-ring HNBR Green suits -06 (3/8") size
ACOR-8	Air Con O-ring HNBR Green suits -08 (1/2") size
ACOR-10	Air Con O-ring HNBR Green suits -10 (5/8") size
ACOR-12	Air Con O-ring HNBR Green suits -12 (3/4") size

**Specifications**

- HNBR (Hydrogenated Nitrile Butadiene Rubber)
- good physical strength and retention properties after long term exposure to oil, heat & chemicals.

**Features**

- HNBR Green O-rings are used in valves / ports of air conditioning components and hose assemblies.

# CABLE TIES

## INCLUDING STAINLESS STEEL TIES AND INSTALLATION GUNS



Recommended cable tie / flush cutter snips  
Product Code: PCTC

### Description :

- All Nylon one piece construction
- Min. loop tensile strength ranging from 8.1kg to a maximum of up to 114kg.
- Cable Ties use UL approved Nylon 6/6 with flamability rating of UL94V-2
- Approved to the requirements of MILITARY 3367 - 1978 and UL Underwriters Laboratories E156597

### Product Range:

- Individual packs
- Mixed pack
- Merchandiser tree
- Also in Stainless Steel and as Velcro® Magic Ties

### Applications:

- A common and useful product for location of hoses in their operating environment
- Use to secure and restrain hose movement to avoid damage through abrasion
- Ideal for urgent small repairs or bundling automotive hoses or electrical cables
- Always take care when using cable ties - consider the application carefully and heed sound installation guidelines. Consult Technical Section A for a guide to installation of hydraulic hoses

INDIVIDUAL PACKS					
Product Code Cable Ties			Pack Quantity	Dimensions mm	Min. Loop Tensile Strength Kg
Nylon	304 St. Steel	Magic Ties			
BPT10025			100	100mm x 2.5mm	8.1
BPT15235			100	150mm x 3.5mm	18.2
	BPTS20046		100	200mm x 4.6mm	
BPT20247 *			100	200mm x 4.8mm	22.2
	BPTS20080		100	200mm x 8.0mm	
		BPTV20016	5	200mm x 16mm	
BPT30148 *			100	300mm x 4.8mm	22.2
		BPTV30016	5	300mm x 16mm	
	BPTS36046		100	360mm x 4.6mm	
	BPTS36080		100	360mm x 8.0mm	
BPT38275			100	368mm x 7.6mm	54.4
BPT38348			100	370mm x 4.8mm	22.2
BPT43090			100	430mm x 9.0mm	79.4
BPT53390			100	533mm x 8.0mm	79.4
BPT55013			100	580mm x 13mm	114.0
BPT76290			100	760mm x 9.0mm	79.4
BPT83090			100	830mm x 9.0mm	79.4
BPT102090			100	1020mm x 9.0mm	79.4
BPT122090			100	1220mm x 9.0mm	79.4


\* Also available in blue, green, red or yellow. Add BL, G, R, or Y Suffix to Product Code

BPT-1000 Mixed Pack Contents	
Product Code	Quantity
BPT10025	200
BPT15235	200
BPT20247	400
BPT3148	200

BPTS80 Cable Tie Tree Merchandiser	
Product Code	Quantity
BPT10025	200
BPT15235	200
BPT20247	400
BPT30148	200


BPTVR Velcro® One Wrap	
Product Code	Roll Detail
BPTVR12	23m x 12mm
BPTVR19	23m x 19mm
BPTVR25	23m x 25mm

CABLE TIE INSTALLATION GUNS	
Product Code	Quantity
BPPCTG-4.8	H. Duty Plastic Gun Adjustable Tension, Auto Cutting. Cuts: 2.5 – 4.8mm Wide Cable Ties
BPPCTG-9.0	Metal Gun Adjustable Tension, Auto Cutting Action. Cuts 2.5 – 9.0mm Wide Cable Ties
BPSTCTG-7.9	Stainless Steel Gun Tightens & Auto cuts with Adjustable Pressure. Tie Thickness – 0.3mm width to 7.9mm



# PIRTIE

## PIRTEK STAPLE RETENTION STRAP

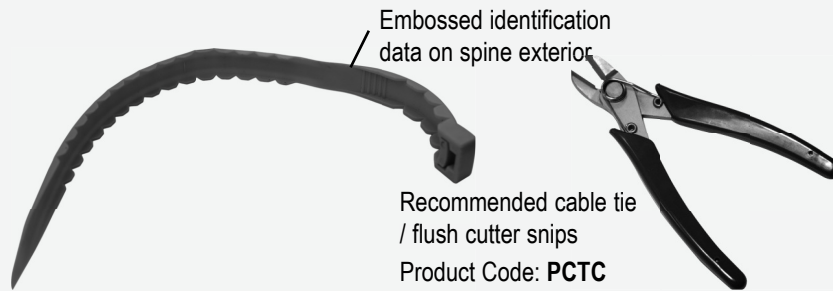


### Description:

- The all-new PirTie Staple Retention Strap is typically used on staplelok and super-staplelok ended hose assemblies and adaptors on underground mining equipment
- Easy to install and trim any excess strap
- No special tools are required. Standard cable tie / flush cutter snips (pictured) are acceptable
- PirTies are intended for single use only
- The staple is fully encapsulated by the PirTie's scalloped edges, adopting a snug fit. This ensures it does not roll off the staple, whether it be a square or "D" shaped profile
- The PirTie's unique design will accommodate most fitting exterior shapes
- A staple is held in place even if a staple leg breaks, but must be changed out as soon as possible to ensure coupling integrity

### Materials Specifications:

- Made from Grey Du-pont UV stabilised virgin flame resistant rated nylon (as required by "MSHA") to a Pirtek registered design (Patent 2008901384 Pending)

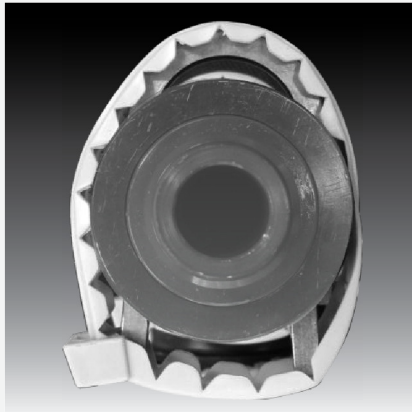

### Applications:


- Used whenever the occurrence of accidental staple migration or breakage could cause a potentially dangerous situation

### Limitations and Tests:

- A laboratory test has revealed that after 150,000 test impulses at the designed system pressure, the staple leg was found to be broken upon removal of the PirTie. The test was terminated at this point, but further tests are pending.
- At the termination point of the test, no leaks or fitting blowout had occurred, and the PirTie was still intact, indicating that the PirTie provides an added level of safety in the event of staple failure between safety audits.

PIRTIE STAPLE RETENTION DEVICE & FLUSH CUTTERS				
Product Code	Description	Suits Staple Type		Pack Size
		Standard	Super	
PIRTIE06-16	Secures DN6 through DN16	•		100
PIRTIE20-25	Secures DN20 through DN25	•	•	100
PIRTIE32-40	Secures DN32 through DN40	•	•	50
PIRTIE50-63	Secures DN50 through DN63	•	•	50
PCTC	Flush Cutter Snips	•	•	1

# HOSE CLEANING GUNS, PROJECTILES & KITS

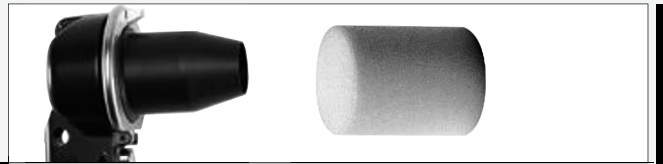

## FKIT

Covers all sizes from 1/4" to 2"

## VKIT

(Not illustrated)

Covers all sizes from 1/4" to 1.1/4"



**IMPORTANT USAGE NOTE:**  
Hoses must be cleaned FROM BOTH ENDS by use of the appropriate pellet BEFORE installing the fittings

### Description:

The Pirtek hose cleaning kit is the ideal choice for high volume cleaning of hydraulic pipes and hoses, as well as dry and liquid flow lines. The unit shoots oversized foam projectiles to clean straight, curved and coiled tubes, pipes and hoses 3/16"-2" (4.8-51mm) I.D. A hinged nozzle housing allows rapid loading of projectiles for fast throughput of large cleaning jobs

### Mobile Solution:

For applications where larger hose and tube sizes are not encountered, a smaller kit catering for sizes up to 1.1/4" is available

### Special Situations:

A wide range of special projectiles are available to special order for special situations


Examples include:

Abrasive: Hose, tube or pipe with build up of contamination, surface rust or scale.

Grinding: Straight lengths of tube or pipe with greater build up of contamination, surface rust or scale

## PIRTEK HOSE CLEANING - STANDARD HOSE CLEANING PELLETS

Product Code	Description	Qty per Bag	Suits Pipe OD	Suits Hose ID
			mm	ins
PJS-007	STANDARD PELLET - 7 mm	300	6	1/4"
PJS-010	STANDARD PELLET - 10 mm	300	8	
PJS-012	STANDARD PELLET - 12 mm	300	10	3/8"
PJS-016	STANDARD PELLET - 16 mm	300	13	1/2"
PJS-020	STANDARD PELLET - 20 mm	300	16	
PJS-022	STANDARD PELLET - 22 mm	300	19	5/8", 3/4"
PJS-026	STANDARD PELLET - 26 mm	200	22	
PJS-033	STANDARD PELLET - 33 mm	50	25	1"
PJS-040	STANDARD PELLET - 40 mm	50	32	1.1/4"
PJS-050	STANDARD PELLET - 50 mm	40	38	1.1/2"
PJS-060	STANDARD PELLET - 60 mm	30	50	2"
PJS-070	STANDARD PELLET - 70 mm	10	63	2.1/2"
PJS-075	STANDARD PELLET - 75 mm	10	70	
PJS-085	STANDARD PELLET - 85 mm	10	80	3"

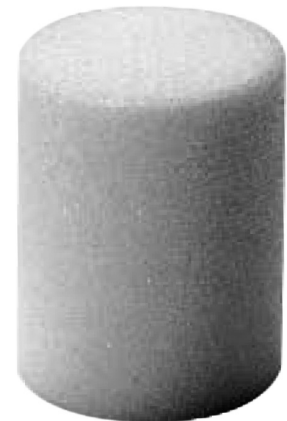

Product Code	Description
FKIT203	HOSE CLEAN KIT
PJ-32H	32mm HEAD
PJ-50H	50mm HEAD
PJ-AR	ADAPTOR RING
PJ-HA2	A-2 HANDPIECE

Nozzle Product Code	PJ-HN06	PJ-HN08	PJ-HN10	PJ-HN13	PJ-HN16	PJ-HN19	PJ-HN25	PJ-HN32	PJ-HN38	PJ-HN50
Suit Hose Size	-06	-08	-10	-13	-16	-19	-25	-32	-38	-50

# THREAD IDENTIFICATION AND TOOL KITS



## TIK THREAD IDENTIFICATION KIT



Product Code	Description
TIK	Thread Identification Kit

**Description**

- An all-in-one solution that addresses the need for a simplified guide to identifying the wide range of hydraulic fittings in common use world wide

**Advantages**

- Most kits simply list the various fitting types and give a run-down on their identifying characteristics. With these, identifying an unfamiliar thread involves searching through page after page of technical data.
- Pirtek's Kit adopts a more logical approach. Simply choose which picture(s) most closely resemble the unknown fitting, and you will be directed to a small selection of fittings that represent the most likely candidates, along with the page numbers on which they appear in detail.

**Contents**

- The Tools You Need
- 3 Steps to Success
- Pictorial Guides
- BSP / JIC / UNO
- SAE / NPT / ORFS
- Flanges
- Metric Ports & Studs
- Metric Compression
- Millimetric / GAZ
- Metric Face Seal (Chinese)
- JIS Metric & BSP
- Banjos Metric & BSP
- Staplelok / Super Staplelok
- SKV / SSKV
- Handy Tips / Variations

## VTSMTS 5 PIECE MAGNETIC TOOL KIT



Product Code	Description
VTSMTS	5 Piece Magnetic Tool Kit

**Description:**

- A handy tool kit for home, workshops and mobile service vehicles.
- helps find and hold parts and tools, keeping them handy and organised

**Contents:**

- 450mm long magnetic tool bar
- Magnetic extendable pocket clip pick up pen
- Magnetic extendable flexible tip pick up tool with LED light
- 150mm diameter magnetic round tray
- 150mm x 250mm magnetic rectangle tray

**Specification:**

- 430 grade Stainless Steel magnetic tool trays
- the round tray has 1 magnet of magnetic field intensity 1000-1200 gauss
- the rectangle tray has 2 magnets of 1000-1200 gauss each
- the pick-up tool with LED has 6 LED lights and can lift up to 1.4kg. It requires 4 batteries LR 44 (batteries included)
- the 450mm bar can hold up to 12kg of items
- the pocket clip pick up pen can lift up to 0.4kg

## VTSOHP 2 PIECE O-RING HOOK AND PICK TOOL SET



Product Code	Description
VTSOHP	2 Piece O-Ring Hook and Pick Tool Kit

**Description:**

- 2 ideal tools for facilitating the removal and installation of o-rings, seals & washers

**Specification:**

- knurled handle design to ensure positive grip is made from aluminium alloy
- the metal rods are made of S2 alloy steel with tip hardness of between 58-62 Rockwell C



**Safety Caution:**

Always wear eye protection to prevent personal injury



# PRESSURE WASHERS

## GUNS, NOZZLES & COUPLINGS

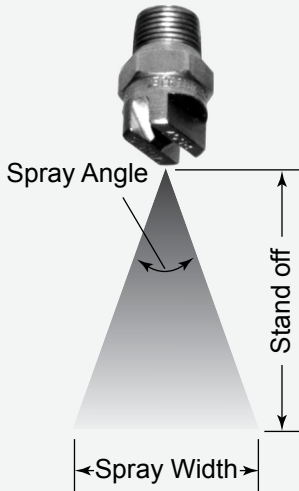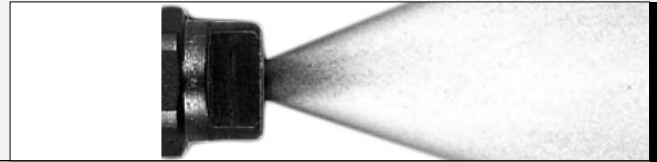

Standoff	Spray Angle						
	5°	15°	25°	40°	65°	80°	110°
10	0.9	2.6	4.4	7.3	12.7	16.8	28.6
12.5	1.1	3.3	5.5	9.1	15.9	21.9	35.7
16	1.4	4.2	7.1	11.6	20.4	26.8	45.7
20	1.8	5.2	8.6	14.6	25.5	33.6	57.1
25	2.2	6.6	11.1	18.2	31.9	42.0	71.4
31.5	2.7	8.3	14.0	22.9	40.1	52.9	90.0
40	3.5	10.5	17.7	29.1	51.0	67.1	114.3
50	4.4	13.2	22.2	36.4	63.7	83.9	142.8
63	5.4	16.6	27.9	45.9	80.3	105.7	179.9
80	7.0	21.1	35.5	58.2	101.9	134.3	228.5
100	9.0	26.0	44.0	73.0	127.0	168.0	286.0

All measurements either as mm or cm


TABLE OF RECOMMENDED FLOW RATES (LITRES / MINUTE) FOR DIFFERENT PRESSURES AND NOZZLE SIZES †

Nozzle Ø mm	Nozzle Size	Colour Code	Pressure in bar															
			20	30	40	50	60	80	100	120	150	175	200	225	250	300	400	500
1.09	0.030	White	3.1	3.7	4.3	4.8	5.2	6.0	6.7	7.3	8.2	8.9	9.5	10.0	10.5	11.6	13.4	15.0
1.19	0.040	Dk. Yellow	4.2	5.2	5.9	6.6	7.0	8.1	9.1	10.0	11.1	12.2	12.9	13.5	14.4	15.8	18.2	20.3
1.27	0.045	Blue	4.5	5.5	6.4	7.1	8.0	9.2	10.3	11.3	12.6	13.0	14.6	15.3	16.3	17.8	20.6	23.0
1.35	0.050	Lt. Purple	5.1	6.2	7.1	8.0	8.7	10.0	11.2	12.3	13.7	14.9	15.8	16.7	17.7	19.4	22.4	25.0
1.40	0.055	Dk. Red	5.6	6.8	7.8	8.7	9.8	11.3	12.6	13.8	15.4	16.7	17.8	18.8	19.9	21.8	25.2	28.2
1.47	0.060	Dk. Green	6.0	7.4	8.6	9.6	10.6	12.3	13.7	15.0	16.8	18.2	19.4	20.4	21.7	23.7	27.4	30.6
1.52	0.065	Lt. Blue	6.6	8.0	9.3	10.4	11.5	13.2	14.8	16.2	18.1	19.7	20.9	21.9	23.0	25.6	29.6	33.0
1.60	0.070	Orange	7.1	8.6	10.0	11.2	12.4	14.3	16.0	17.5	19.6	21.2	22.6	23.8	25.3	27.7	32.0	35.8
1.65	0.075		7.6	9.3	10.7	12.0	13.1	15.2	16.9	18.5	20.7	22.4	23.9	25.3	26.7	29.4	33.7	37.7
1.70	0.080	Silver	8.0	9.8	11.3	12.7	14.1	16.3	18.2	19.9	22.3	24.1	25.7	27.0	28.8	31.5	36.4	40.7
1.75	0.085	White Rose	8.5	10.4	12.1	13.5	15.0	17.4	19.4	21.3	23.8	25.7	27.4	28.8	30.7	33.6	38.8	43.4
1.80	0.090	Gold	9.1	11.1	12.8	14.3	16.3	18.8	21.0	23.0	25.7	28.0	29.7	30.3	33.2	35.1	42.0	47.0
1.90	0.100	White Blue	10.0	12.3	14.2	16.0	17.8	20.6	23.0	25.2	28.2	31.0	31.8	32.5	36.4	39.8	46.0	51.4
2.34	0.150		15.1	18.5	21.3	23.9	26.1	30.2	33.8	36.9	41.3	44.6	47.7	50.5	53.3	58.7	67.2	75.2
2.69	0.200	White Red	20.1	24.7	28.5	31.9	35.6	41.1	46.0	50.4	56.3	61.0	65.1	68.3	71.1	79.7	92.0	102.9
2.99	0.250		25.2	30.9	35.1	39.8	43.6	50.4	56.4	61.8	69.1	74.6	79.8	84.6	89.2	96.0	110.0	125.0
3.30	0.300		30.2	37.0	42.7	47.8	52.4	60.5	67.6	74.0	82.8	89.4	95.6	101.0	107.0	118.0	149.0	151.0
3.56	0.350		35.3	43.2	50.0	55.8	61.1	70.5	78.9	86.4	96.6	104.0	111.0	118.0	125.0	130.0	162.0	175.0
3.81	0.400		40.3	49.4	57.0	63.7	69.8	80.7	90.2	98.8	110.0	119.0	127.0	135.0	143.0	157.0	198.0	202.2
4.24	0.500		50.5	61.6	71.4	79.8	87.4	100.9	112.9	124.0	138.0	149.0	160.0	169.0	178.0	200.0	225.0	249.0
4.65	0.600		60.5	74.2	85.6	95.7	104.9	121.1	135.4	148.0	166.0	179.0	191.0	203.0	214.0	235.0	260.0	302.0

† Tabulated values indicative only

# PRESSURE WASHERS

## GUNS, NOZZLES & COUPLINGS

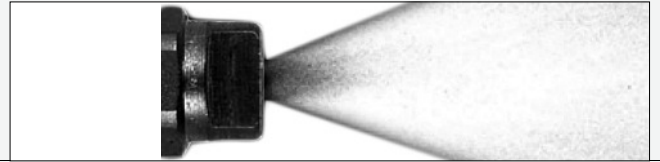

### IPW-16.

#### MEG NOZZLES - 1/4" BSPT



15° Chiseling		25° Flushing		40° Wash	
Product Code	Orifice	Product Code	Orifice	Product Code	Orifice
		IPW-16.1325.25	0.025		
				IPW-16.1340.30	0.030
IPW-16.1315.35	0.035				
IPW-16.1315.40	0.040				
IPW-16.1315.45	0.045	IPW-16.1325.45	0.045		
IPW-16.1315.50	0.050				
		IPW-16.1325.65	0.065		

- Stainless Steel
- Rated to 250 bar
- 1/4" BSPT Male Thread

### IPW-21.

#### ADJ. DETERGENT INJECTOR



Product Code	Inlet	Outlet	Nozzle	Type
IPW-21.0150.21	3/8" BSP Male	3/8" BSP Male	2.1 mm	Adjustable

- Flow Capacity 30 l/min
- Rated to 280 bar max.
- Max. Temp 90°C

### IPW-25.0700

#### VARIABLE SPRAY HI-LO NOZZLE




Product Code	Colour Code	Orifice	Inlet	Capacity	Pressure
IPW-25.0700.14	Dark Yellow	0.040	1/4" BSP Female	40 L/min	250 bar
IPW-25.0700.15	Blue	0.045	1/4" BSP Female	40 L/min	250 bar

- Push forward for low pressure detergent injection
- Pull back for high pressure activation


# PRESSURE WASHERS

## GUNS, NOZZLES & COUPLINGS

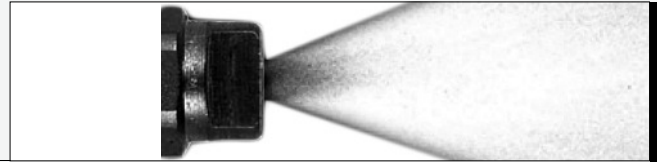

## IPW-25.16xx

### ROTATING TURBO NOZZLE

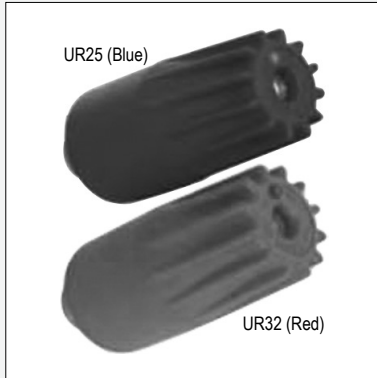

Blue UR25 (80 - 250 bar)			Red UR32 (180 - 352 bar)		
Product Code	Colour Code	Orifice (inch)	Product Code	Colour Code	Orifice (inch)
IPW-25.1620.30	White	0.030			
IPW-25.1620.35	Brown	0.035			
IPW-25.1620.40	Dark Yellow	0.040	IPW-25.1690.40	Dark Yellow	0.040
IPW-25.1620.45	Blue	0.045			
IPW-25.1620.50	Light Blue	0.050			
IPW-25.1620.55	Dark Red	0.055			
IPW-25.1620.70	Orange	0.070			

- Concentrated stream in a conical pattern
- Inlet 1/4" BSPT Female Thread

## IPW-26.00xx

### M22x1.5 TYPE A STANDARD NIPPLE



M22 Standard Adaptor Nipples		
Product Code	Metric Thread	BSP Thread
IPW-26.0002.31	M22 x 1.5	1/4" Fem
IPW-26.0030.31	M22 x 1.5	3/8" Male
IPW-26.0031.31	M22 x 1.5	3/8" Fem
IPW-26.0051.31	M22 x 1.5	1/4" Male

- All examples use a M22x 1.5 metric thread to take a 14 mm pin of standard length
- BSP adaptor threads as tabulated
- Suit flow rates to 40 litres / min
- Rated pressure 250 bar (max. 280 bar)

## IPW-26.0250

### M22 STANDARD CONNECTOR NUTS




M22 Standard Connector Nuts		
Product Code	Metric Thread	BSP Thread
IPW-26.0250.20	M22 x 1.5	1/4" Female
IPW-26.0250.30	M22 x 1.5	1/4" Male
IPW-26.0250.40	M22 x 1.5	3/8" Female
IPW-26.0250.50	M22 x 1.5	3/8" Male

- All examples use a M22x 1.5 metric thread and incorporate a 14 mm pin of standard length
- BSP adaptor threads as tabulated
- Suit flow rates to 40 litres / min
- Rated pressure 250 bar (max. 280 bar)

# PRESSURE WASHERS

GUNS, NOZZLES & COUPLINGS

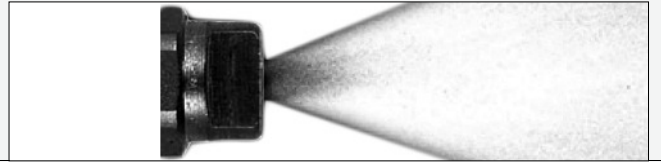

## IPW-26.1032

M22x1.5 TYPE A EXTENDED NIPPLE



M22 Extended Pin Adaptor Nipples		
Product Code	Metric Thread	BSP Thread
IPW-26.1032.31	M22 x 1.5	1/4" Fem

- M22x 1.5 metric thread to accommodate an extended length 14 mm pin
- 1/4" BSP female adaptor thread
- Suit flow rates to 40 litres / min
- Rated pressure 250 bar (max. 280 bar)



Extended vs Standard Nipple Length

## IPW-26.1034

M22 EXTENDED CONNECTOR NUTS



M22 Standard Connector Nuts		
Product Code	Metric Thread	BSP Thread
IPW-26.1034.20	M22 x 1.5	1/4" Female
IPW-26.1034.50	M22 x 1.5	1/4" Male

- M22x 1.5 metric thread incorporating a 14 mm pin of extended length
- BSP adaptor threads as tabulated
- Suit flow rates to 40 litres / min
- Rated pressure 250 bar (max. 280 bar)

## IPW-26.1050

IN-LINE BRASS SWIVEL




In-Line Brass Swivel		
Product Code	Inlet	Outlet
IPW-26.1050.00	3/8" BSP Male	3/8" BSP Female

- Suit flow rates to 40 litres / min
- Rated pressure 250 bar (max. 280 bar)

This page is part of a complete catalogue containing technical and safety data. All data must be reviewed when selecting a product. Pirtek reserve the right to change technical specifications without notice.

# PRESSURE WASHERS

## GUNS, NOZZLES & COUPLINGS

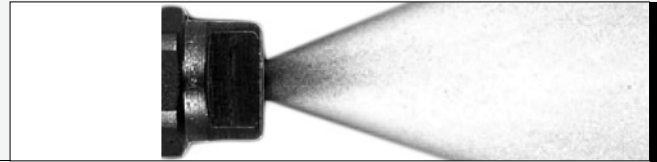

### IPW-26.2010

#### BALL QUICK COUPLING BODY (TYPE B)



3/8" QUICK COUPLING BODY		
Product Code	BSP Thread	
IPW-26.2010.00	3/8" Male	
IPW-26.2010.10	3/8" Female	
IPW-26.2010.20	1/4" Female	

- Hardened Steel body
- 250 bar working pressure

### IPW-26.20xx

#### BALL QUICK COUPLING PLUG (TYPE A)



3/8" QUICK COUPLING PLUG		
Product Code	BSP Thread	
IPW-26.2015.61	3/8" Female	
IPW-26.2016.61	1/4" Female	
IPW-26.2023.61	3/8" Male	

- Hardened Steel body
- 250 bar working pressure

### IPW-28.1000

#### STRAINER WITH CHECK VALVE




Plastic Strainer with Check Valve		
Product Code	Hose Barb	
IPW-28.1000.30	7 mm	

- 7 mm hose barb
- Stainless steel check valve
- Plastic body

# PRESSURE WASHERS

## GUNS, NOZZLES & COUPLINGS

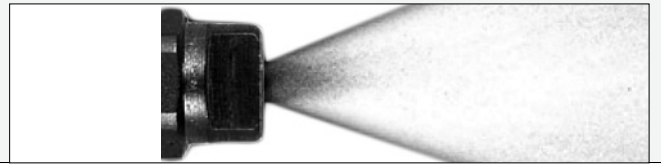

### IPW-30.12xx

#### RL37 SPRAY GUNS



RL37 SPRAY GUNS WITH SWIVEL INLET

Product Code	Inlet	Outlet	Pressure	Feature
IPW-30.1215.00	3/8" BSP Fem	1/4" BSP Fem	280 bar	Weep Gun †
IPW-30.1220.86	3/8" BSP Fem	1/4" BSP Fem	280 bar	-

- 3/8" BSP female swivel attachment
- Suit flow rates to 40 litres / min
- Rated pressure as tabulated
- † By design, this gun is slow to close off. It reduces shock loads to pumps, and is widely used in multiple gun applications such as carwashes

### IPW-30.20xx

#### VEGA SPRAY GUNS - 4500 psi (310 Bar) max. W.P.



VEGA SPRAY GUNS

Product Code	Inlet	Outlet	Swivel
IPW-30.2000.86	3/8" BSP Fem	1/4" BSP Fem	No
IPW-30.2030.86	3/8" BSP Fem	1/4" BSP Fem	Yes

- 3/8" BSP female attachment
- Suit flow rates to 40 litres / min
- 310 bar (4500 psi) pressure rating

### IPW-30.4500

#### RL56 PROFESSIONAL SPRAY GUN



RL56 PROFESSIONAL SPRAY GUN

Product Code	Inlet	Outlet	Pressure
IPW-30.4500.10	3/8" BSP Fem	1/4" BSP Fem	350 bar


- High pressure low volume gun
- Suit flow rates to 30 litres / min
- 350 bar pressure rating

This page is part of a complete catalogue containing technical and safety data.  
All data must be reviewed when selecting a product.  
Pirtek reserve the right to change technical specifications without notice.



# PRESSURE WASHERS

## GUNS, NOZZLES & COUPLINGS

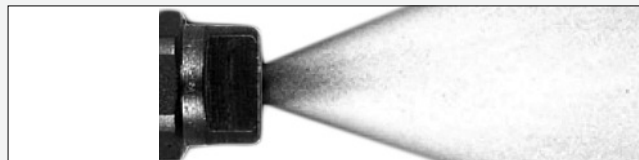

### IPW-30.6425

#### RB65 SPRAY GUN - FOOD INDUSTRY



RB65 WASH DOWN GUN WITH SWIVEL INLET		
Product Code	BSP Thread	Temperature
IPW-30.6425.00	1/2" Male	Up to +90°C

- Specialty gun for low pressure wash down
- Ideal in food, dairy and transit mixer applications
- adjustable flow capacity from 0-60 liters/min
- 24 bar working pressure
- Shock proof design
- Blue rubber extremities prevent breakage when dropped
- The ideal companion to Pirtek Premium Washdown Hose IRPWD

### IPW-40.0370

#### VENTED HAND GRIP




VENTED 380 mm HAND GRIP		
Product Code	Inlet	Outlet
IPW-40.0370.00	1/4" BSP Male	1/4" BSP Female

- Flow Rate 40 litres/min
- Zinc plated steel tube
- 250 bar working pressure
- 380 mm long

### IPW-40.0503

#### STAINLESS STEEL LANCE TUBE

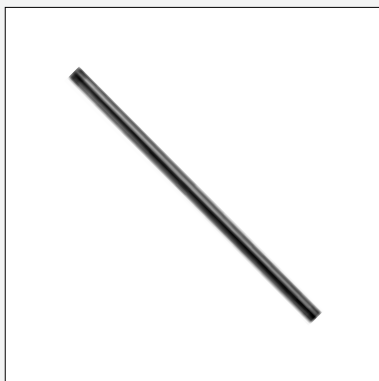


Stainless Steel Lance Tube 500 mm		
Product Code	Length	Pressure
IPW-40.0503.56	500 mm	250 bar

- 1/4" BSP male threaded ends
- 40 litres/min flow capacity
- Stainless steel tube

# PRESSURE WASHERS

## GUNS, NOZZLES & COUPLINGS

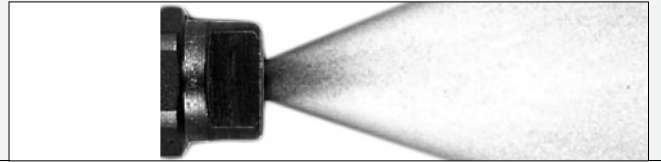

### IPW-40.0965.00

#### S3 VENTED GRIP SPRAY LANCE



##### S3 VENTED GRIP SPRAY LANCE 900 mm

Product Code	Inlet	Outlet	Pressure
IPW-40.0965.00	1/4" BSP Male	1/4" BSP Female	250 bar

- Stainless steel tube
- 40 litres/min flow capacity
- Vented plastic grip
- Complete with nozzle protector

### IPW-41.0900.00

#### DUAL HI-LO SPRAY LANCE



##### DUAL HI-LO SPRAY LANCE WITH VENTED GRIP

Product Code	Inlet	Outlet	Length
IPW-41.0900.00	1/4" BSP Male	1/4" BSP Fem	1090 mm

- Stainless Steel
- 40 litres/min flow capacity
- 250 bar working pressure
- Vented plastic grip
- Twist grip allows switching between high pressure and detergent

### IPW-60.0016.60

#### PULSAR UNLOADER WITH GAUGE PORT - 3200 psi (220 Bar) W.P.




##### PULSAR 3 UNLOADER VALVE WITH PRESSURE GAUGE PORT

Product Code	Inlet (2)	Outlet	By-Pass (2)
IPW-60.0016.60	3/8" BSP Fem	3/8" BSP Fem	3/8" BSP Fem

- Suits flow rates to 30 litres / min
- 220 bar (3200 psi) working pressure (250 bar max)
- Includes 1/4" BSP pressure gauge port
- 90°C max temperature

# PRESSURE WASHERS

## GUNS, NOZZLES & COUPLINGS

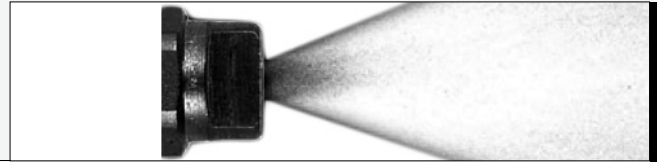

### IPW-85.240.300

DETERGENT NOZZLE 1/4" TO SUIT DUAL LANCE



Detergent Nozzle	
Product Code	Function
IPW-85.240.300	Detergent

- Adds detergent in dual lance guns
- 1/4" BSPT Male Thread

Oils & Greases		Lubrication Equipment Grease & Oil Cont.		Air Equipment		Automotive hoses	
Auto Degreaser	6	PL320 & PL321	20	PL710, PL721 & PL725	41	Air Con Hose and Fittings	71-72
Automatic Transmission Fluid	4	PL322 & PL324	21	PL730 & PL731	41	Brake Vacuum	68
Brake Parts Cleaner	6	PL325 & PL326	21	PL735	41	EFI Fuel	69
EP2 Grease	5	PL330	22	PL739	42	Fuel	67
GP Grease	5	PL331	22	PL740	42	Heater	69
Oil - Hydraulic	3	PL332	22	PL749	42	LPG	67
Power Steering Fluid	4	PL340	22	<b>Miscellaneous</b>		Merchandisers	70
VABPC	6	PL341	23	BEKA MAX 20 Grease System	23	P26	67
VAD	6	PL400	24	ALNDP-15FPH Diaphragm pump	43	P3111	67
VATF	4	PL401	24	ALNDP-xxBAH Diaphragm pump	43	P311T	67
VEP2	5	PL402	24	AL20022 Cordless Light	44	P3300	68
VHT	3	PL404	25	<b>Hose Reels</b>		P4205	68
VPS	4	PL410 - PL412	25	AL501xxx	46	P4801	69
		PL414	25	AL504xxx	46	P5130	69
		PL417	26	AL505xxx	46	P525	69
		PL430 - PL435	26	AL7342	47	PCH	70
		PL440	27	ALAP650 / ALAP840	48	Power Steering Return	69
		PL443 - PL449	27	ALAP809 / ALAS812	48	Transmission Cooler	67
		PL450	27	ALOS615	47	Vacuum, Washer, Radiator	68
		PL451	28	ALWP808 / ALWS812	48	<b>Industrial Adhesives</b>	
		PL460	28	Hose Reels General	45	Epoxy	59
		PL461	29	Open Reels	46	IAA471	55
		PL462	29	Oxy Acetylene	47	IAAA	60
		PL465	30	Reel Dispensers	45	IACA41	58
		PL466	30	Retracting Reel 1" Capacity	47	IACA60	58
		PL467	30	Rolla Reels	48	IANA	60
		PL470	31	<b>Lanolin Protect</b>		IAR41	57
		PL480 & PL481	31	Aerosol Can	49	IAR62	58
		PL482	32	Empty Jerry	49	IAREX5	59
		PL484 & PL485	32	Grease	49	IAS55	55
		PL487 - PL489	32	Liquid Release Agent	49	IAS57	57
		PL515	35	Merchandise Display Stand	49	IAS69	56
		<b>Waste Oil Handling</b>		Mining	51	IAS72	56
		PL490	33	PIR300C	49	IAS77	57
		<b>Fuel Equipment</b>		PIRG	49	IASIL	60
		PL500	33	PIRJ/T	49	IAT43 & IAT77	55
		PL503	34	PIRMS4	49	Chemical Resistance Tables	61-65
		PL510 & PL511	34	PIRRA	49	Instant Bonding	58
		PL515	35	PIRxL	49	Retaining	57-58
		PL517	35	Points To Note	50	Sealing & Gasketing	56-57
		PL520 & PL521	36	Protect	49	TDS198	59
		PL530 & PL531	36	Uses	51-54	TDS252	59
		PL540 & PL541	36	<b>Cable Ties &amp; Staple Retainers</b>		Thread Lubricant	60
		PL550	37	BPT	73	Threadlocker	55
		PL560	37	Cable Ties & Tools	73	<b>Pressure Washers</b>	
		PL561	38	Flush Cutter Snips	73	Couplings	80
		PL570 & PL571	38	Pirtie Staple Retainer	74	Detergent Injector	78
		PL572	38	<b>Hose Cleaning</b>		Detergent Nozzle	85
		<b>Chemical Pumps</b>		Cleaning Pellets	75	MEG Nozzles	78
		PL600	39	FKIT (Full Kit)	75	Metric Nuts & Nipples	79
		PL601	39	PJ	75	Spray Guns	82-83
		PL610	39	PJS	75	Spray Lances & Components	83-84
		<b>Drum Accessories</b>		Spare Parts	75	Spray Nozzle Data	77
		PL670	40	VKIT (Van Kit)	75	Strainers	81
		PL671	40	<b>Tool Kits</b>		Swivels	80
		PL672	40	Thread Identification Kit (TIK)	76	Turbo Nozzles	79
		PL673	40	Magnetic Pick Up Tool Kit	76	Unloaders	84
				O-Ring Pick Kit	76	Variable Nozzle	78